
TABLE OF CONTENTS

Single Unit	1-2
Picture Unit	1-5
Twin Casement	1-12
Triple Casement	1-14
Sector Top	1-17
Sector Top 2 Wide	1-20
Sector Top 3 Wide	1-22
French Casement	1-25
French Sector Top	1-26
French Half Round Top	1-27
Extended HR	1-28
Extended Qtr Rd	1-31
4 Wide Bow	1-37
5 Wide Bow	1-39
6 Wide Bow	1-41
30 Bay 18 Flanker	1-43
30 Bay 24 Flanker	1-45
30 Bay 28 Flanker	1-47
45 Bay 18 Flanker	1-49
45 Bay 24 Flanker	1-51
45 Bay 28 Flanker	1-53

ELEVATIONS
SINGLE CASEMENT UNITS

	MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	21 1/4"(540) 24 5/16"(618) 18 3/4"(476) 18"(457) 11 7/8"(302)	23 1/4"(591) 26 5/16"(668) 20 3/4"(527) 20"(508) 13 7/8"(352)	27 1/4"(692) 30 5/16"(770) 24 3/4"(629) 24"(610) 17 7/8"(454)	31 1/4"(794) 34 5/16"(872) 28 3/4"(730) 28"(711) 21 7/8"(556)	33 1/4"(845) 36 5/16"(922) 30 3/4"(781) 30"(762) 23 7/8"(607)	35 1/4"(895) 38 5/16"(973) 32 3/4"(832) 32"(813) 25 7/8"(657)	39 1/4"(997) 42 5/16"(1075) 36 3/4"(933) 36"(914) 29 7/8"(759)
20 1/2"(521) 22"(559) 18 3/4"(476) 18"(457) 11 7/8"(302)								
22 1/2"(572) 24"(610) 20 3/4"(527) 20"(508) 13 7/8"(352)								
26 1/2"(673) 28"(711) 24 3/4"(629) 24"(610) 17 7/8"(454)								
32 1/2"(826) 34"(864) 30 3/4"(781) 30"(762) 23 7/8"(607)								
34 1/2"(876) 36"(914) 32 3/4"(832) 32"(813) 25 7/8"(657)								
38 1/2"(978) 40"(1016) 36 3/4"(933) 36"(914) 29 7/8"(759)								
42 1/2"(1080) 44"(1118) 40 3/4"(1035) 40"(1016) 33 7/8"(860)								
44 1/2"(1130) 46"(1168) 42 3/4"(1086) 42"(1067) 35 7/8"(911)								

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT FOR SECOND FLOOR AND ABOVE.
- E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SW. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5. SQ FT FOR FIRST FLOOR.
- S STATIONARY UNIT
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
SINGLE CASEMENT UNITS

	MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	21 1/4"(540) 24 5/16"(618) 18 3/4"(476) 18"(457) 11 7/8"(302)	23 1/4"(591) 26 5/16"(668) 20 3/4"(527) 20"(508) 13 7/8"(352)	27 1/4"(692) 30 5/16"(770) 24 3/4"(629) 24"(610) 17 7/8"(454)	31 1/4"(794) 34 5/16"(872) 28 3/4"(730) 28"(711) 21 7/8"(556)	33 1/4"(845) 36 5/16"(922) 30 3/4"(781) 30"(762) 23 7/8"(607)	35 1/4"(895) 38 5/16"(973) 32 3/4"(832) 32"(813) 25 7/8"(657)	39 1/4"(997) 42 5/16"(1075) 36 3/4"(933) 36"(914) 29 7/8"(759)
50 1/2"(1308) 52"(1321) 48 3/4"(1238) 48"(1219) 41 7/8"(1064)								
56 1/2"(1435) 58"(1473) 54 3/4"(1391) 54"(1372) 47 7/8"(1216)								
58 1/2"(1486) 60"(1524) 56 3/4"(1441) 56"(1422) 49 7/8"(1267)								
62 1/2"(1588) 64"(1626) 60 3/4"(1543) 60"(1524) 53 7/8"(1368)								
66 1/2"(1689) 68"(1727) 64 3/4"(1645) 64"(1626) 57 7/8"(1470)								

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT FOR SECOND FLOOR AND ABOVE.
- E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SW. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5. SQ FT FOR FIRST FLOOR.
- S STATIONARY UNIT
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
SINGLE CASEMENT UNITS

	21 1/4"(540)	23 1/4"(591)	27 1/4"(692)	31 1/4"(794)	33 1/4"(845)	35 1/4"(895)	39 1/4"(997)
MO BRICKMOLD	24 5/16"(618)	26 5/16"(668)	30 5/16"(770)	34 5/16"(872)	36 5/16"(922)	38 5/16"(973)	42 5/16"(1075)
MO FLAT CASING	18 3/4"(476)	20 3/4"(527)	24 3/4"(629)	28 3/4"(730)	30 3/4"(781)	32 3/4"(832)	36 3/4"(933)
ROUGH OPENING	18"(457)	20"(508)	24"(610)	28"(711)	30"(762)	32"(813)	36"(914)
FRAME SIZE	11 7/8"(302)	13 7/8"(352)	17 7/8"(454)	21 7/8"(556)	23 7/8"(607)	25 7/8"(657)	29 7/8"(759)
DAYLIGHT OPENING							
	68 1/2"(1740)						
	70"(1778)						
	66 3/4"(1695)						
	65"(1676)						
	59 7/8"(1581)						
				E*	E	E	E
	CCC1866	CCC2066	CCC2466	CCC2866	CCC3066	CCC3266	CCC3666
	74 1/2"(1892)						
	76"(1930)						
	72 3/4"(1848)						
	72"(1829)						
	65 7/8"(1673)						
				E*	E	E	E
	CCC1872	CCC2072	CCC2472	CCC2872	CCC3072	CCC3272	CCC3672
	80 1/2"(2045)						
	82 1/32"(2084)						
	78 3/4"(2000)						
	78"(1981)						
	64 3/8"(1635)						
				E*	E	E	E
	CCC1878	CCC2078	CCC2478	CCC2878	CCC3078	CCC3278	CCC3678
	86 1/2"(2197)						
	88 1/32"(2236)						
	84 3/4"(2153)						
	84"(2134)						
	70 3/8"(1788)						
				E*	E	E	E
	CCC1884	CCC2084	CCC2484	CCC2884	CCC3084	CCC3284	CCC3684

ELEVATION SYMBOL LEGEND:
M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT FOR SECOND FLOOR AND ABOVE.
E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SW. FT.
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5. SQ FT FOR FIRST FLOOR.
S STATIONARY UNIT
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
PICTURE CASEMENT UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

43 1/4"(1099)
46 5/16"(1176)
40 3/4"(1035)
40"(1016)
33 7/8"(860)

45 1/4"(1149)
48 5/16"(1227)
42 3/4"(1086)
42"(1067)
35 7/8"(911)

51 1/4"(1302)
54 5/16"(1380)
48 3/4"(1238)
48"(1219)
41 7/8"(1064)

57 1/4"(1454)
60 5/16"(1532)
54 3/4"(1391)
54"(1372)
47 7/8"(1216)

59 1/4"(1505)
62 5/16"(1583)
56 3/4"(1441)
56"(1422)
49 7/8"(1267)

38 1/2"(978) 40"(1016) 36 3/4"(933) 36"(914) 29 7/8"(759)					
42 1/2"(1080) 44"(1118) 40 3/4"(1035) 40"(1016) 33 7/8"(860)					
44 1/2"(1130) 46"(1168) 42 3/4"(1086) 42"(1067) 35 7/8"(911)					
51 1/2"(1308) 52"(1321) 48 3/4"(1238) 48"(1219) 41 7/8"(1064)					
56 1/2"(1435) 58"(1473) 54 3/4"(1391) 54"(1372) 47 7/8"(1216)					
58 1/2"(1486) 60"(1524) 56 3/4"(1441) 56"(1422) 49 7/8"(1267)					

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O. (Masorny Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
PICTURE CASEMENT UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

43 1/4"(1099)
46 5/16"(1176)
40 3/4"(1035)
40"(1016)
33 7/8"(860)


45 1/4"(1149)
48 5/16"(1227)
42 3/4"(1086)
42"(1067)
35 7/8"(911)

51 1/4"(1302)
54 5/16"(1380)
48 3/4"(1238)
48"(1219)
41 7/8"(1064)


57 1/4"(1454)
60 5/16"(1532)
54 3/4"(1391)
54"(1372)
47 7/8"(1216)

59 1/4"(1505)
62 5/16"(1583)
56 3/4"(1441)
56"(1422)
49 7/8"(1267)


62 1/2"(1588)
64"(1626)
60 3/4"(1543)
60"(1524)
53 7/8"(1366)




CCCP4060




CCCP4260



CCCP4860




CCCP5460




CCCP5660


66 1/2"(1689)
68"(1727)
64 3/4"(1645)
64"(1626)
57 7/8"(1470)




CCCP4064




CCCP4264



CCCP4864




CCCP5464




CCCP5664


68 1/2"(1740)
70"(1778)
66 3/4"(1695)
66"(1676)
59 7/8"(1581)




CCCP4066




CCCP4266



CCCP4866




CCCP5466




CCCP5666


74 1/2"(1892)
76"(1930)
72 3/4"(1848)
72"(1829)
65 7/8"(1673)




CCCP4072




CCCP4272



CCCP4872



CCCP5472



CCCP5672

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
PICTURE CASEMENT UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

43 1/4"(1099)
46 5/16"(1176)
40 3/4"(1035)
40"(1016)
33 7/8"(860)


45 1/4"(1149)
48 5/16"(1227)
42 3/4"(1086)
42"(1067)
35 7/8"(911)

51 1/4"(1302)
54 5/16"(1380)
48 3/4"(1238)
48"(1219)
41 7/8"(1064)


57 1/4"(1454)
60 5/16"(1532)
54 3/4"(1391)
54"(1372)
47 7/8"(1216)

59 1/4"(1505)
62 5/16"(1583)
56 3/4"(1441)
56"(1422)
49 7/8"(1267)


80 1/2"(2045)
82 1/32"(2084)
78 3/4"(2000)
78"(1981)
64 3/8"(1635)




CCCP4078




CCCP4278



CCCP4878




CCCP5478




CCCP5678


86 1/2"(2187)
88 1/32"(2236)
84 3/4"(2153)
84"(2134)
70 3/8"(1788)




CCCP4084




CCCP4284



CCCP4884



CCCP5484



CCCP5684

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
PICTURE CASEMENT UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

63 1/4"(1607)
66 5/16"(1684)
60 3/4"(1543)
60"(1524)
53 7/8"(1368)

67 1/4"(1708)
70 5/16"(1786)
64 3/4"(1645)
64"(1626)
57 7/8"(1470)

69 1/4"(1759)
72 5/16"(1837)
66 3/4"(1695)
66"(1676)
59 7/8"(1581)

38 1/2"(978)
40"(1016)
36 3/4"(933)
36"(914)
29 7/8"(759)



CCCP6036



CCCP6436



CCCP6636

42 1/2"(1080)
44"(1118)
40 3/4"(1035)
40"(1016)
33 7/8"(860)



CCCP6040




CCCP6440



CCCP6640

44 1/2"(1130)
46"(1168)
42 3/4"(1086)
42"(1067)
35 7/8"(911)



CCCP6042




CCCP6442



CCCP6642

51 1/2"(1308)
52"(1321)
48 3/4"(1238)
48"(1219)
41 7/8"(1064)



CCCP6048




CCCP6448




CCCP6648


56 1/2"(1435)
58"(1473)
54 3/4"(1391)
54"(1372)
47 7/8"(1216)



CCCP6054




CCCP6454




CCCP6654


58 1/2"(1486)
60"(1524)
56 3/4"(1441)
56"(1422)
49 7/8"(1267)



CCCP6056



CCCP6456



CCCP6656

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS
PICTURE CASEMENT UNITS**


MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

63 1/4"(1607)
66 5/16"(1684)
60 3/4"(1543)
60"(1524)
53 7/8"(1368)


67 1/4"(1708)
70 5/16"(1786)
64 3/4"(1645)
64"(1626)
57 7/8"(1470)

69 1/4"(1759)
72 5/16"(1837)
66 3/4"(1695)
66"(1676)
59 7/8"(1581)


62 1/2"(1588)
64"(1626)
60 3/4"(1543)
60"(1524)
53 7/8"(1368)



CCCP6060




CCCP6460




CCCP6660


66 1/2"(1688)
68 1/2"(1728)
64 3/4"(1645)
64"(1626)
57 7/8"(1470)



CCCP6064




CCCP6464




CCCP6664


68 1/2"(1740)
70 1/2"(1778)
66 3/4"(1695)
66"(1676)
59 7/8"(1581)



CCCP6066




CCCP6466




CCCP6666


74 1/2"(1892)
76 1/2"(1930)
72 3/4"(1848)
72"(1829)
65 7/8"(1673)



CCCP6072



CCCP6472



CCCP6672

ELEVATION SYMBOL LEGEND:
M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masorny Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
PICTURE CASEMENT UNITS


MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

63 1/4"(1607)
66 5/16"(1684)
60 3/4"(1543)
60"(1524)
53 7/8"(1368)


67 1/4"(1708)
70 5/16"(1786)
64 3/4"(1645)
64"(1626)
57 7/8"(1470)

69 1/4"(1759)
72 5/16"(1837)
66 3/4"(1695)
66"(1676)
59 7/8"(1581)


80 1/2"(2045)
82 1/32"(2084)
78 3/4"(2000)
78"(1961)
64 3/8"(1635)



CCCP6078




CCCP6478




CCCP6678


86 1/2"(2197)
88 1/32"(2236)
84 3/4"(2153)
84"(2104)
70 3/8"(1766)



CCCP6084



CCCP6484



CCCP6684

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
PICTURE CASEMENT UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

75 1/4"(1911)
78 5/16"(1989)
72 3/4"(1848)
72"(1829)
65 7/8"(1673)

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

75 1/4"(1911)
78 5/16"(1989)
72 3/4"(1848)
72"(1829)
65 7/8"(1673)




CCCP7236




CCCP7240




CCCP7242

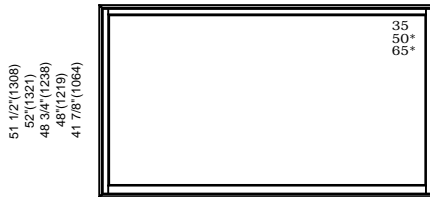

CCCP7248

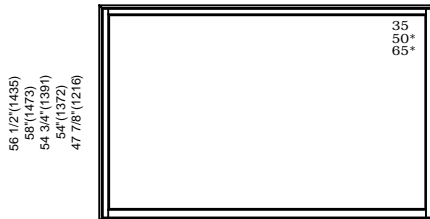


CCCP7254

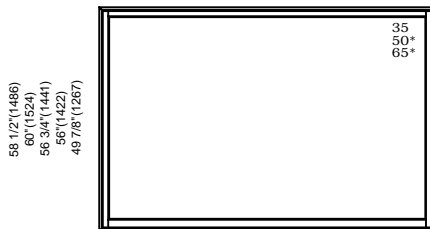


CCCP7256

62 1/2"(1588)
64"(1626)
60 3/4"(1543)
60"(1524)
53 7/8"(1368)




CCCP7260

66 1/2"(1689)
68"(1727)
64 3/4"(1645)
64"(1626)
57 7/8"(1470)




CCCP7264

68 1/2"(1740)
70"(1778)
66 3/4"(1695)
66"(1676)
59 7/8"(1581)



CCCP7266

74 1/2"(1892)
76"(1930)
72 3/4"(1848)
72"(1829)
65 7/8"(1673)



CCCP7272

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masorny Opening) for Unit Sizes. Masorny openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masorny Openings page.

ELEVATIONS
2-WIDE CASEMENT UNITS

MO BRICKMOLD	39 1/4"(997)	43 1/4"(1099)	51 1/4"(1302)	59 1/4"(1505)	63 1/4"(1607)	67 1/4"(1708)	75 1/4"(1911)
MO FLAT CASING	42 5/16"(1075)	46 5/16"(1176)	54 5/16"(1380)	62 5/16"(1583)	66 5/16"(1684)	70 5/16"(1786)	80 5/16"(2040)
ROUGH OPENING	36 3/4"(934)	40 3/4"(1035)	48 3/4"(1238)	56 3/4"(1442)	60 3/4"(1543)	64 3/4"(1645)	72 3/4"(1848)
FRAME SIZE	36"(914)	40"(1016)	48"(1219)	56"(1422)	60"(1524)	64"(1626)	72"(1829)
DAYLIGHT OPENING	13"(330) [2]	15"(381) [2]	19"(483) [2]	23"(584) [2]	25"(635) [2]	27"(686) [2]	31"(787) [2]
20 1/2"(521)							
22 1/2"(572)							
26 1/2"(673)							
32 1/2"(826)							
34 1/2"(876)							
38 1/2"(978)							
42 1/2"(1079)							
44 1/2"(1130)							
50 1/2"(1283)							
56 1/2"(1435)							
58 1/2"(1486)							
62 1/2"(1588)							

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT FOR SECOND FLOOR AND ABOVE.
- E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SW. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ.FT FOR FIRST FLOOR.
- S STATIONARY UNIT
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
2-WIDE CASEMENT UNITS

MO BRICKMOLD	39 1/4"(997)	43 1/4"(1099)	51 1/4"(1302)	59 1/4"(1505)	63 1/4"(1607)	67 1/4"(1708)	75 1/4"(1911)
MO FLAT CASING	42 5/16"(1075)	46 5/16"(1176)	54 5/16"(1380)	62 5/16"(1583)	66 5/16"(1684)	70 5/16"(1786)	80 5/16"(2040)
ROUGH OPENING	36 3/4"(934)	40 3/4"(1035)	48 3/4"(1238)	56 3/4"(1442)	60 3/4"(1543)	64 3/4"(1645)	72 3/4"(1848)
FRAME SIZE	36"(914)	40"(1016)	48"(1219)	56"(1422)	60"(1524)	64"(1626)	72"(1829)
DAYLIGHT OPENING	13"(330) [2]	15"(381) [2]	19"(483) [2]	23"(584) [2]	25"(635) [2]	27"(686) [2]	31"(787) [2]

66 1/2"(1689) 68 1/2"(1728) 64 3/4"(1645) 64"(1626) 56 3/8"(1432)							
74 1/2"(1892) 76 1/2"(1931) 68 3/4"(1695) 68"(1695) 58 3/8"(1483)							
74 1/2"(1892) 76 1/2"(1931) 72 3/4"(1848) 72"(1829) 64 3/8"(1635)							
80 1/2"(2045) 82 1/2"(2084) 78 3/4"(2000) 78"(1981) 64 3/8"(1635)							
86 1/2"(2197) 88 1/2"(2236) 84 3/4"(2153) 84"(2134) 70 3/8"(1788)							

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT FOR SECOND FLOOR AND ABOVE.
- E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SW. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.
- C STATIONARY UNIT
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS TRIPLE CASEMENT UNITS

	57 1/4"(1454)	63 1/4"(1607)	75 1/4"(1911)	87 1/4"(2216)	93 1/4"(2369)	99 1/4"(2521)
MO BRICKMOLD	60 5/16"(1532)	66 5/16"(1684)	80 5/16"(2040)	90 5/16"(2294)	96 5/16"(2446)	102 5/16"(2599)
MO FLAT CASING	54 3/4"(1391)	60 3/4"(1543)	72 3/4"(1848)	84 3/4"(2153)	90 3/4"(2305)	96 3/4"(2458)
ROUGH OPENING	54"(1372)	60"(1524)	72"(1829)	84"(2134)	90"(2286)	96"(2438)
FRAME SIZE	13"(330) [3]	15"(381) [3]	19"(483) [3]	23"(584) [3]	25"(635) [3]	27"(689) [3]
DAYLIGHT OPENING						
20 1/2"(521)	CCC1818-3	CCC2018-3	CCC2418-3	CCC2818-3	CCC3018-3	CCC3218-3
22 1/2"(572)	CCC1820-3	CCC2020-3	CCC2420-3	CCC2820-3	CCC3020-3	CCC3220-3
24 1/2"(623)	CCC1824-3	CCC2024-3	CCC2424-3	CCC2824-3	CCC3024-3	CCC3224-3
26 1/2"(673)	CCC1830-3	CCC2030-3	CCC2430-3	CCC2830-3	CCC3030-3	CCC3230-3
28 1/2"(724)	CCC1832-3	CCC2032-3	CCC2432-3	CCC2832-3	CCC3032-3	CCC3232-3
30 1/2"(774)	CCC1836-3	CCC2036-3	CCC2436-3	CCC2836-3	CCC3036-3	CCC3236-3
32 1/2"(825)	CCC1840-3	CCC2040-3	CCC2440-3	CCC2840-3	CCC3040-3	CCC3240-3
34 1/2"(876)	CCC1842-3	CCC2042-3	CCC2442-3	CCC2842-3	CCC3042-3	CCC3242-3
36 1/2"(927)	CCC1848-3	CCC2048-3	CCC2448-3	CCC2848-3	CCC3048-3	CCC3248-3
38 1/2"(978)	CCC1854-3	CCC2054-3	CCC2454-3	CCC2854-3	CCC3054-3	CCC3254-3
40 1/2"(1029)	CCC1856-3	CCC2056-3	CCC2456-3	CCC2856-3	CCC3056-3	CCC3256-3
42 1/2"(1080)	CCC1860-3	CCC2060-3	CCC2460-3	CCC2860-3	CCC3060-3	CCC3260-3
44 1/2"(1131)						
46 1/2"(1182)						
48 1/2"(1233)						
50 1/2"(1284)						
52 1/2"(1335)						
54 1/2"(1386)						
56 1/2"(1437)						
58 1/2"(1488)						
60 1/2"(1539)						
62 1/2"(1590)						
64 1/2"(1641)						
66 1/2"(1692)						
68 1/2"(1743)						
70 1/2"(1794)						
72 1/2"(1845)						
74 1/2"(1896)						
76 1/2"(1947)						
78 1/2"(1998)						
80 1/2"(2049)						
82 1/2"(2100)						
84 1/2"(2151)						
86 1/2"(2202)						
88 1/2"(2253)						
90 1/2"(2304)						
92 1/2"(2355)						
94 1/2"(2406)						
96 1/2"(2457)						
98 1/2"(2508)						
100 1/2"(2559)						

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
- E* BASIC UNIT CLEAR OPENING REQUIRES EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SW. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.
- S STATIONARY UNIT
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
TRIPLE CASEMENT UNITS

MO BRICKMOLD	57 1/4"(1454)	63 1/4"(1607)	75 1/4"(1911)	87 1/4"(2216)	93 1/4"(2369)	99 1/4"(2521)
MO FLAT CASING	60 5/16"(1532)	66 5/16"(1684)	80 5/16"(2040)	90 5/16"(2294)	96 5/16"(2446)	102 5/16"(2599)
ROUGH OPENING	54 3/4"(1391)	60 3/4"(1543)	72 3/4"(1848)	84 3/4"(2153)	90 3/4"(2305)	96 3/4"(2458)
FRAME SIZE	54"(1372)	60"(1524)	72"(1829)	84"(2134)	90"(2286)	96"(2438)
DAYLIGHT OPENING	13"(330) [3]	15"(381) [3]	19"(483) [3]	23"(584) [3]	25"(635) [3]	27"(689) [3]

74 1/2"(1892) 76 1/32"(1931) 66 3/4"(1695) 66"(1695) 58 3/8"(1483)						
74 1/2"(1892) 76 1/32"(1931) 72 3/4"(1848) 72"(1829) 64 3/8"(1635)						
80 1/2"(2045) 82 1/32"(2084) 78 3/4"(2000) 78"(1981) 64 3/8"(1635)						
86 1/2"(2197) 88 1/32"(2236) 84 3/4"(2153) 84"(2134) 70 3/8"(1788)						

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
- E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SW. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.
- S STATIONARY UNIT
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS
TRIPLE CASEMENT UNITS**

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

111 1/4"(2826)
114 5/16"(2904)
108 3/4"(2762)
108"(2743)
31"(787) [3]

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

111 1/4"(2826)
114 5/16"(2904)
108 3/4"(2762)
108"(2743)
31"(787) [3]

19 1/2"(500)	20 1/2"(521)		S
20 1/2"(521)	22 1/2"(572)		S
22 1/2"(572)	24 1/2"(623)		S
24 1/2"(623)	26 1/2"(674)		S
26 1/2"(674)	28 1/2"(725)		S
28 1/2"(725)	30 3/4"(781)		E1
30 3/4"(781)	32 1/2"(832)		E
32 1/2"(832)	34 1/2"(883)		E
34 1/2"(883)	36 1/2"(934)		E
36 1/2"(934)	38 1/2"(985)		E
38 1/2"(985)	40 1/2"(1036)		E
40 1/2"(1036)	42 1/2"(1087)		E
42 1/2"(1087)	44 1/2"(1138)		E

74 1/2"(1892)
76 1/2"(1931)
66 3/4"(1695)
66"(1695)
58 3/8"(1483)

	E
	E
	E
	E

74 1/2"(1892)
76 1/2"(1931)
72 3/4"(1848)
72"(1829)
64 3/8"(1635)

80 1/2"(2045)
82 1/2"(2084)
78 3/4"(2000)
78"(1981)
64 3/8"(1635)

86 1/2"(2197)
88 1/2"(2236)
84 3/4"(2153)
84"(2134)
70 3/8"(1788)

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
- E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SW. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.
- S STATIONARY UNIT
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
SECTOR-TOP CASEMENT UNITS

	21 1/4"(540)	23 1/4"(591)	27 1/4"(692)	31 1/4"(794)	33 1/4"(845)	35 1/4"(895)	39 1/4"(977)
MO BRICKMOLD	24 5/16"(618)	26 5/16"(668)	30 5/16"(770)	34 5/16"(872)	36 5/16"(922)	38 5/16"(973)	42 5/16"(1075)
MO FLAT CASING	18 3/4"(476)	20 3/4"(527)	24 3/4"(629)	28 3/4"(730)	30 3/4"(781)	32 3/4"(832)	36 3/4"(934)
ROUGH OPENING	18"(457)	20"(508)	24"(610)	28"(711)	30"(762)	32"(813)	36"(914)
FRAME SIZE	13"(330)	15"(381)	19"(483)	23"(584)	25"(635)	27"(686)	31"(787)
DAYLIGHT OPENING							
	26 1/2"(673) 28 1/32"(712) 24 3/4"(629) 24"(610) 18 3/8"(467)						
	CCCS1824	CCCS2024	CCCS2424				
	32 1/2"(826) 34 1/32"(864) 30 3/4"(781) 30"(762) 24 3/8"(619)						
	CCCS1830	CCCS2030	CCCS2430	CCCS2830	CCCS3030		
	34 1/2"(876) 36 1/32"(915) 32 3/4"(832) 32"(813) 26 3/8"(670)						
	CCCS1832	CCCS2032	CCCS2432	CCCS2832	CCCS3032	CCCS3232	
	38 1/2"(978) 40 1/32"(1017) 36 3/4"(933) 36"(914) 30 3/8"(772)						
	CCCS1836	CCCS2036	CCCS2436	CCCS2836	CCCS3036	CCCS3236	CCCS3636
	42 1/2"(1080) 44 1/32"(1118) 40 3/4"(1035) 40"(1016) 34 3/8"(873)						
	CCCS1840	CCCS2040	CCCS2440	CCCS2840	CCCS3040	CCCS3240	CCCS3640
	44 1/2"(1130) 46 1/32"(1169) 42 3/4"(1086) 42"(1067) 36 3/8"(924)						
	CCCS1842	CCCS2042	CCCS2442	CCCS2842	CCCS3042	CCCS3242	CCCS3642
	50 1/2"(1283) 52 1/32"(1322) 48 3/4"(1229) 48"(1219) 42 3/8"(1076)						
	CCCS1848	CCCS2048	CCCS2448	CCCS2848	CCCS3048	CCCS3248	CCCS3648

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING

VALUES IN () ARE IN MILLIMETER CONVERSIONS

E. BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.

E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR

NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
SECTOR-TOP CASEMENT UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

21 1/4"(540)
24 5/16"(618)
18 3/4"(476)
18"(457)
13"(330)

23 1/4"(591)
26 5/16"(668)
20 3/4"(527)
20"(508)
15"(381)

27 1/4"(692)
30 5/16"(770)
24 3/4"(629)
24"(610)
19"(483)

31 1/4"(794)
34 5/16"(872)
28 3/4"(730)
28"(711)
23"(584)

33 1/4"(845)
36 5/16"(922)
30 3/4"(781)
30"(762)
25"(635)

35 1/4"(895)
38 5/16"(973)
32 3/4"(832)
32"(813)
27"(686)

39 1/4"(977)
42 5/16"(1075)
36 3/4"(934)
36"(914)
31"(787)

56 1/2"(1435)
58 1/2"(1474)
54"(1391)
54"(1372)
48 3/8"(1228)



CCCS1854



CCCS2054



CCCS2454



CCCS2854



CCCS3054



CCCS3254




CCCS3654

58 1/2"(1486)
60 1/2"(1525)
56 3/4"(1442)
56 3/8"(1422)
50 3/8"(1280)



CCCS1856



CCCS2056



CCCS2456



CCCS2856



CCCS3056



CCCS3256




CCCS3656

62 1/2"(1588)
64 1/2"(1626)
60 3/4"(1543)
60 3/8"(1523)
54 3/8"(1381)



CCCS1860



CCCS2060



CCCS2460



CCCS2860



CCCS3060



CCCS3260




CCCS3660

66 1/2"(1689)
68 1/2"(1728)
64 3/4"(1645)
64 3/8"(1625)
58 3/8"(1483)



CCCS1864



CCCS2064



CCCS2464



CCCS2864



CCCS3064



CCCS3264



CCCS3664

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT FOR FIRST FLOOR
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
SECTOR-TOP CASEMENT UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

21 1/4"(540)
24 5/16"(618)
18 3/4"(476)
18"(457)
13"(330)

23 1/4"(591)
26 5/16"(668)
20 3/4"(527)
20"(508)
15"(381)

27 1/4"(692)
30 5/16"(770)
24 3/4"(629)
24"(610)
19"(483)







31 1/4"(794)
34 5/16"(872)
28 3/4"(730)
28"(711)
23"(584)

33 1/4"(845)
36 5/16"(922)
30 3/4"(781)
30"(762)
25"(635)







35 1/4"(895)
38 5/16"(973)
32 3/4"(832)
32"(813)
27"(686)

39 1/4"(977)
42 5/16"(1075)
36 3/4"(934)
36"(914)
31"(787)





68 1/2"(1740)
70 1/32"(1779)
66 3/4"(1686)
69 1/4"(1769)
60 3/8"(1534)







74 1/2"(1892)
76 1/32"(1931)
72 3/4"(1846)
74 1/4"(1929)
66 3/8"(1686)



80 1/2"(2045)
82 1/32"(2084)
78 3/4"(2000)
80 1/4"(2081)
72 3/8"(1838)



86 1/2"(2197)
88 1/32"(2236)
84 3/4"(2153)
86 1/4"(2210)
78 3/8"(1991)



ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT FOR FIRST FLOOR
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O. (Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
TWIN SECTOR TOP CASEMENT UNITS

MO BRICKMOLD	39 1/4"(997)	43 1/4"(1099)	51 1/4"(1302)	59 1/4"(1505)	63 1/4"(1607)	67 1/4"(1708)	75 1/4"(1911)
MO FLAT CASING	42 5/16"(1075)	46 5/16"(1176)	54 5/16"(1380)	62 5/16"(1583)	66 5/16"(1684)	70 5/16"(1786)	80 5/16"(2040)
ROUGH OPENING	36 3/4"(934)	40 3/4"(1035)	48 3/4"(1238)	56 3/4"(1442)	60 3/4"(1543)	64 3/4"(1645)	72 3/4"(1848)
FRAME SIZE	36"(914)	40"(1016)	48"(1219)	56"(1422)	60"(1524)	64"(1626)	72"(1829)
DAYLIGHT OPENING	13"(330) [2]	15"(381) [2]	19"(483) [2]	23"(584) [2]	25"(635) [2]	27"(686) [2]	31"(787) [2]

26 1/2"(673) 28 1/32"(712) 24 3/4"(629) 24"(610) 18 3/8"(467)							
32 1/2"(826) 34 1/32"(864) 30 3/4"(781) 30"(762) 24 3/8"(619)							
34 1/2"(876) 36 1/32"(915) 32 3/4"(832) 32"(813) 26 3/8"(670)							
38 1/2"(978) 40 1/32"(1017) 36 3/4"(933) 36"(914) 30 3/8"(772)							
42 1/2"(1079) 44 1/32"(1118) 40 3/4"(1035) 40"(1016) 34 3/8"(873)							
44 1/2"(1130) 46 1/32"(1169) 42 3/4"(1086) 42"(1067) 36 3/8"(924)							
50 1/2"(1283) 52 1/32"(1322) 48 3/4"(1238) 48"(1219) 42 3/8"(1076)							
56 1/2"(1435) 58 1/32"(1474) 54 3/4"(1391) 54"(1372) 46 3/8"(1178)							
58 1/2"(1486) 60 1/32"(1525) 56 3/4"(1441) 56"(1422) 48 3/8"(1229)							
62 1/2"(1588) 64 1/32"(1628) 60 3/4"(1543) 60"(1524) 52 3/8"(1330)							
66 1/2"(1689) 68 1/32"(1728) 64 3/4"(1645) 64"(1626) 56 3/8"(1432)							
	CCCS1824-2	CCCS2024-2	CCCS2424-2	CCCS1830-2	CCCS2030-2	CCCS2430-2	CCCS2830-2
	CCCS1832-2	CCCS2032-2	CCCS2432-2	CCCS2832-2	CCCS3032-2	CCCS3232-2	
	CCCS1836-2	CCCS2036-2	CCCS2436-2	CCCS2836-2	CCCS3036-2	CCCS3236-2	CCCS3636-2
	CCCS1840-2	CCCS2040-2	CCCS2440-2	CCCS2840-2	CCCS3040-2	CCCS3240-2	CCCS3640-2
	CCCS1842-2	CCCS2042-2	CCCS2442-2	CCCS2842-2	CCCS3042-2	CCCS3242-2	CCCS3642-2
	CCCS1848-2	CCCS2048-2	CCCS2448-2	CCCS2848-2	CCCS3048-2	CCCS3248-2	CCCS3648-2
	CCCS1854-2	CCCS2054-2	CCCS2454-2	CCCS2854-2	CCCS3054-2	CCCS3254-2	CCCS3654-2
	CCCS1856-2	CCCS2056-2	CCCS2456-2	CCCS2856-2	CCCS3056-2	CCCS3256-2	CCCS3656-2
	CCCS1860-2	CCCS2060-2	CCCS2460-2	CCCS2860-2	CCCS3060-2	CCCS3260-2	CCCS3660-2
	CCCS1864-2	CCCS2064-2	CCCS2464-2	CCCS2864-2	CCCS3064-2	CCCS3264-2	CCCS3664-2

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
- E 1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS
TWIN SECTOR TOP CASEMENT UNITS**

MO BRICKMOLD	39 1/4"(997)	43 1/4"(1099)	51 1/4"(1302)	59 1/4"(1505)	63 1/4"(1607)	67 1/4"(1708)	75 1/4"(1911)
MO FLAT CASING	42 5/16"(1075)	46 5/16"(1176)	54 5/16"(1380)	62 5/16"(1583)	66 5/16"(1684)	70 5/16"(1786)	80 5/16"(2040)
ROUGH OPENING	36 3/4"(934)	40 3/4"(1035)	48 3/4"(1238)	56 3/4"(1442)	60 3/4"(1543)	64 3/4"(1645)	72 3/4"(1848)
FRAME SIZE	36"(914)	40"(1016)	48"(1219)	56"(1422)	60"(1524)	64"(1626)	72"(1829)
DAYLIGHT OPENING	13"(330) [2]	15"(381) [2]	19"(483) [2]	23"(584) [2]	25"(635) [2]	27"(686) [2]	31"(787) [2]

74 1/2"(1892) 76 1/32"(1931) 66 3/4"(1695) 66"(1695) 58 3/8"(1483)							
CCCS1866-2	CCCS2066-2	CCCS2466-2	CCCS2866-2	CCCS3066-2	CCCS3266-2	CCCS3666-2	
74 1/2"(1892) 76 1/32"(1931) 72 3/4"(1848) 72"(1829) 64 3/8"(1635)							
CCCS1872-2	CCCS2072-2	CCCS2472-2	CCCS2872-2	CCCS3072-2	CCCS3272-2	CCCS3672-2	
80 1/2"(2045) 82 1/32"(2084) 78 3/4"(2000) 78"(1981) 64 3/8"(1635)							
CCCS1878-2	CCCS2078-2	CCCS2478-2	CCCS2878-2	CCCS3078-2	CCCS3278-2	CCCS3678-2	
86 1/2"(2197) 88 1/32"(2236) 84 3/4"(2153) 84"(2134) 70 3/8"(1788)							
CCCS1884-2	CCCS2084-2	CCCS2484-2	CCCS2884-2	CCCS3084-2	CCCS3284-2	CCCS3684-2	

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
- E 1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
3-WIDE SECTOR TOP CASEMENT UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

57 1/4"(1454)
60 5/16"(1532)
54 3/4"(1391)
54"(1372)
13"(330) [3]

63 1/4"(1607)
66 5/16"(1684)
60 3/4"(1543)
60"(1524)
15"(381) [3]

75 1/4"(1911)
80 5/16"(2040)
72 3/4"(1848)
72"(1829)
19"(483) [3]

87 1/4"(2216)
90 5/16"(2294)
84 3/4"(2153)
84"(2134)
23"(584) [3]

93 1/4"(2369)
96 5/16"(2446)
90 3/4"(2305)
90"(2286)
25"(635) [3]

99 1/4"(2521)
102 5/16"(2599)
96 3/4"(2458)
96"(2438)
27"(689) [3]

26 1/2"(673) 26 1/32"(712) 24 3/4"(629) 24"(610) 16 3/8"(467)						
32 1/2"(826) 34 1/32"(864) 30 3/4"(781) 30"(762) 24 3/8"(619)						
34 1/2"(876) 36 1/32"(915) 32 3/4"(832) 32"(813) 26 3/8"(670)						
38 1/2"(978) 40 1/32"(1017) 36 3/4"(933) 36"(914) 30 3/8"(772)						
42 1/2"(1079) 44 1/32"(1118) 40 3/4"(1035) 40"(1016) 34 3/8"(873)						
44 1/2"(1130) 46 1/32"(1169) 42 3/4"(1086) 42"(1067) 36 3/8"(924)						
50 1/2"(1283) 52 1/32"(1322) 48 3/4"(1238) 48"(1219) 42 3/8"(1076)						
56 1/2"(1435) 58 1/32"(1474) 54 3/4"(1391) 54"(1372) 46 3/8"(1178)						
58 1/2"(1486) 60 1/32"(1525) 56 3/4"(1441) 56"(1422) 48 3/8"(1228)						
62 1/2"(1588) 64 1/32"(1628) 60 3/4"(1543) 60"(1524) 52 3/8"(1330)						
66 1/2"(1689) 68 1/32"(1728) 64 3/4"(1605) 64"(1626) 56 3/8"(1432)						

ELEVATION SYMBOL LEGEND:

M.O. = MASONRY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
3-WIDE SECTOR TOP CASEMENT UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

57 1/4"(1454)
60 5/16"(1532)
54 3/4"(1391)
54"(1372)
13"(330) [3]


63 1/4"(1607)
66 5/16"(1684)
60 3/4"(1543)
60"(1524)
15"(381) [3]

75 1/4"(1911)
80 5/16"(2040)
72 3/4"(1848)
72"(1829)
19"(483) [3]

87 1/4"(2216)
90 5/16"(2294)
84 3/4"(2153)
84"(2134)
23"(584) [3]

93 1/4"(2369)
96 5/16"(2446)
90 3/4"(2305)
90"(2286)
25"(635) [3]

99 1/4"(2521)
102 5/16"(2599)
96 3/4"(2458)
96"(2438)
27"(689) [3]

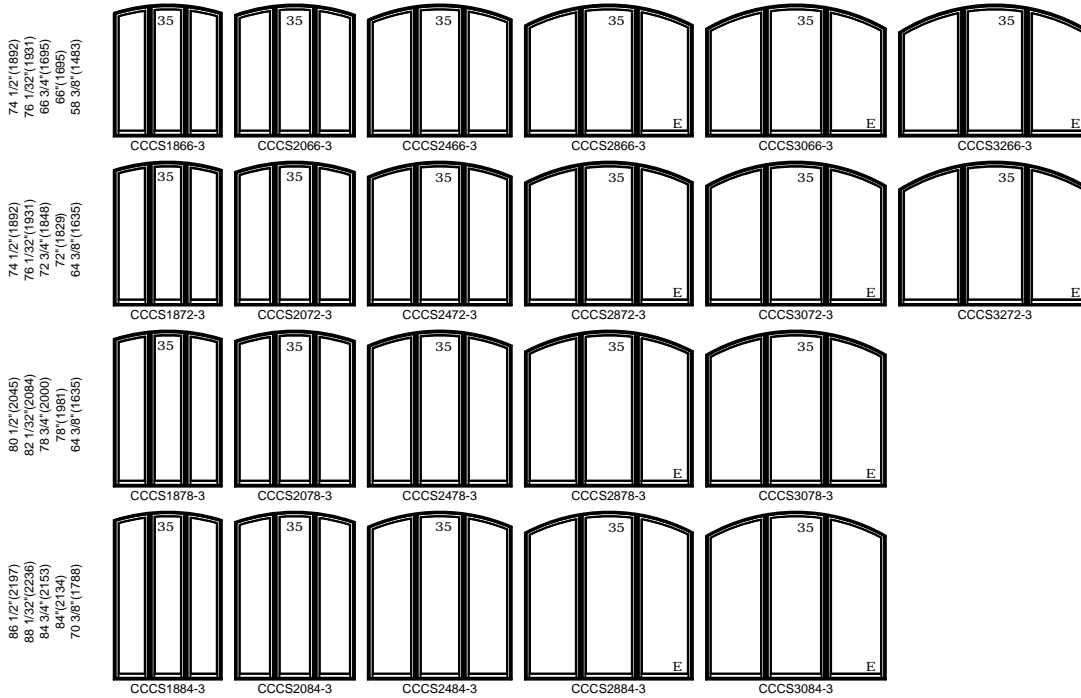

ELEVATION SYMBOL LEGEND:



M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O. (Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
3-WIDE SECTOR TOP CASEMENT UNITS

MO BRICKMOLD 111 1/4"(2826)
MO FLAT CASING 114 5/16"(2904)
ROUGH OPENING 108 3/4"(2762)
FRAME SIZE 108"(2743)
DAYLIGHT OPENING 31"(787) [3]

MO BRICKMOLD 111 1/4"(2826)
MO FLAT CASING 114 5/16"(2904)
ROUGH OPENING 108 3/4"(2762)
FRAME SIZE 108"(2743)
DAYLIGHT OPENING 31"(787) [3]

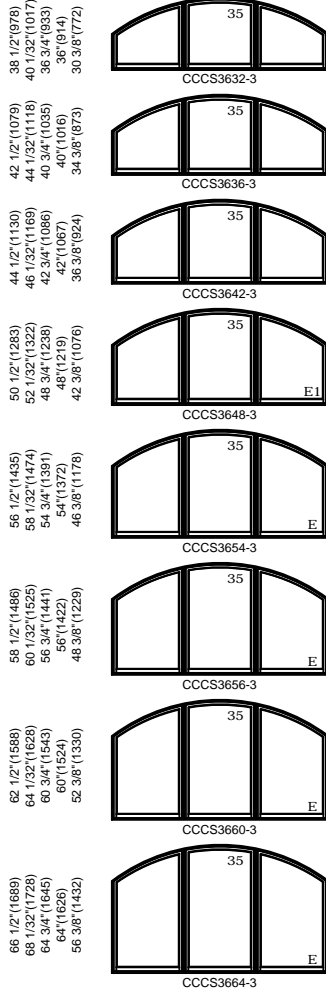

ELEVATION SYMBOL LEGEND:

M.O. = MASONRY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
E 1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
FRENCH CASEMENT UNITS

MO BRICKMOLD	39 1/4"(997)	51 1/4"(1302)	59 1/4"(1505)	MO BRICKMOLD	39 1/4"(997)	51 1/4"(1302)	59 1/4"(1505)
MO FLAT CASING	42 5/16"(1075)	54 5/16"(1380)	62 5/16"(1583)	MO FLAT CASING	42 5/16"(1075)	54 5/16"(1380)	62 5/16"(1583)
ROUGH OPENING	36 3/4"(934)	48 3/4"(1238)	56 3/4"(1442)	ROUGH OPENING	36 3/4"(934)	48 3/4"(1238)	56 3/4"(1442)
FRAME SIZE	36"(914)	48"(1219)	56"(1422)	FRAME SIZE	36"(914)	48"(1219)	56"(1422)
DAYLIGHT OPENING	13"(330) [2]	19"(483) [2]	23"(584) [2]	DAYLIGHT OPENING	13"(330) [2]	19"(483) [2]	23"(584) [2]
20 1/2"(521)				62 1/2"(1588)			
22 1/2"(572)				64 1/2"(1628)			
24 1/2"(623)				66 1/2"(1668)			
26 1/2"(674)				68 1/2"(1708)			
28 1/2"(725)				69 3/4"(1748)			
30 1/2"(776)				71 1/2"(1788)			
32 1/2"(827)				72 3/4"(1828)			
34 1/2"(878)				74 1/2"(1868)			
36 1/2"(929)				76 1/2"(1908)			
38 1/2"(980)				77 1/2"(1948)			
40 1/2"(1031)				78 3/4"(1988)			
42 1/2"(1082)				80 1/2"(2028)			
44 1/2"(1133)				82 1/2"(2068)			
46 1/2"(1184)				84 1/2"(2108)			
48 1/2"(1235)				86 1/2"(2148)			
50 1/2"(1286)				88 1/2"(2188)			
52 1/2"(1337)				90 1/2"(2228)			
54 1/2"(1388)							
56 1/2"(1439)							
58 1/2"(1490)							

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.
 ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O. (Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
FRENCH SECTOR-TOP CASEMENT UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

39 1/4"(997)
42 5/16"(1075)
36 3/4"(934)
36"(914)
13"(330) [2]

51 1/4"(1302)
54 5/16"(1380)
48 3/4"(1238)
48"(1219)
19"(483) [2]

59 1/4"(1507)
62 5/16"(1583)
56 3/4"(1442)
56"(1422)
23"(584) [2]

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

39 1/4"(997)
42 5/16"(1075)
36 3/4"(934)
36"(914)
13"(330) [2]


51 1/4"(1302)
54 5/16"(1380)
48 3/4"(1238)
48"(1219)
19"(483) [2]

59 1/4"(1507)
62 5/16"(1583)
56 3/4"(1442)
56"(1422)
23"(584) [2]


32 1/2"(826)
34 1/2"(876)
38 1/2"(978)
42 1/2"(1079)
44 1/2"(1130)
44 1/2"(1130)
50 1/2"(1283)
56 1/2"(1435)
58 1/2"(1486)
60 1/2"(1525)
60 1/2"(1525)
66 1/2"(1689)
74 1/2"(1892)
74 1/2"(1892)

34 1/32"(864)
30 3/4"(781)
30 3/4"(832)
36 1/32"(915)
36 3/4"(933)
36 3/4"(933)
40 1/32"(1017)
40 1/32"(1035)
40 1/32"(1035)
42 1/32"(1086)
42 1/32"(1086)
48 3/4"(1238)
48 3/4"(1238)
54 3/4"(1391)
54 3/4"(1391)
56 3/4"(1441)
56 3/4"(1441)
62 5/16"(1583)
62 5/16"(1583)
64 3/4"(1645)
64 3/4"(1645)
72 3/4"(1848)
72 3/4"(1848)
76 1/32"(1931)
76 1/32"(1931)

30 3/8"(761)
26 3/8"(670)
30 3/8"(772)
34 3/8"(873)
36 3/8"(924)
36 3/8"(924)
42 3/8"(1076)
46 3/8"(1178)
46 3/8"(1178)
48 3/8"(1229)
48 3/8"(1229)

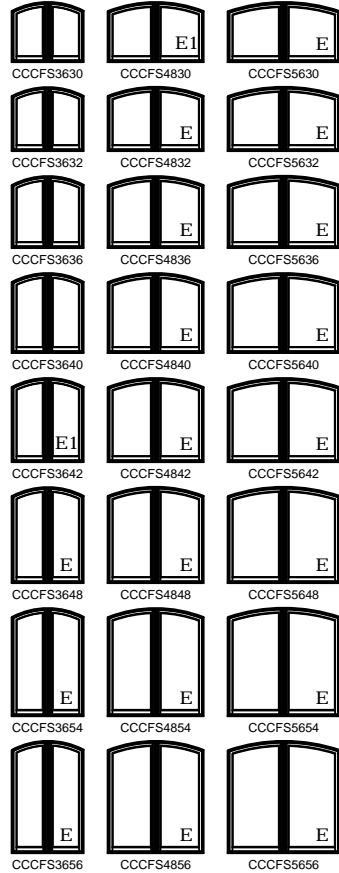

62 1/2"(1588)
64 1/32"(1628)
60 3/4"(1543)
60"(1524)
52 3/8"(1330)
66 1/2"(1689)
68 1/32"(1728)
64 3/4"(1645)
64 1/2"(1626)
56 3/8"(1432)
74 1/2"(1892)
76 1/32"(1931)
66 3/4"(1695)
66"(1695)
58 3/8"(1483)
74 1/2"(1892)
76 1/32"(1931)
72 3/4"(1848)
72"(1829)
64 3/8"(1635)

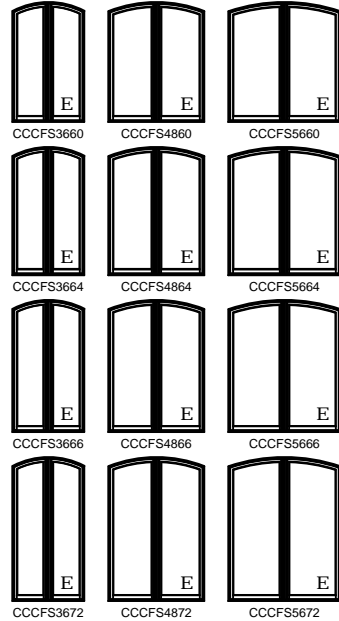

ELEVATION SYMBOL LEGEND:

M.O. = MASORYN OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.
NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


ELEVATIONS
FRENCH HALF ROUND CASEMENT UNITS

MO BRICKMOLD 39 1/4"(997)
MO FLAT CASING 42 5/16"(1075)
ROUGH OPENING 36 3/4"(933)
FRAME SIZE 36"(914)
DAYLIGHT OPENING 13"(330) [2]

MO BRICKMOLD 39 1/4"(997)
MO FLAT CASING 42 5/16"(1075)
ROUGH OPENING 36 3/4"(933)
FRAME SIZE 36"(914)
DAYLIGHT OPENING 13"(330) [2]


51 1/4"(1302)
54 5/16"(1380)
48 3/4"(1238)
48"(1219)
19"(483) [2]

56 1/2"(1435)
58 1/32"(1474)
54 3/4"(1391)
54"(1372)
46 3/16"(1173)




CCCFH3654

58 1/2"(1486)
60 1/32"(1525)
56 3/4"(1441)
56"(1422)
48 3/16"(1224)




CCCFH3656

62 1/2"(1588)
64 1/32"(1628)
60 3/4"(1543)
60"(1524)
52 3/16"(1326)




CCCFH3660

66 1/2"(1689)
68 1/32"(1728)
64 3/4"(1645)
64"(1626)
56 3/16"(1427)




CCCFH3664

74 1/2"(1892)
76 1/32"(1931)
66 3/4"(1695)
66"(1695)
58 3/16"(1478)




CCCFH3666




CCCFH4866

74 1/2"(1892)
76 1/32"(1931)
72 3/4"(1848)
72"(1829)
64 3/16"(1630)



CCCFH3672



CCCFH4872

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.
NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
EXTENDED HALF ROUND UNITS

MO BRICKMOLD	21 1/4"(540)	23 1/4"(591)	27 1/4"(692)	31 1/4"(794)	33 1/4"(845)	35 1/4"(895)	39 1/4"(997)
MO FLAT CASING	24 5/16"(618)	26 5/16"(668)	30 5/16"(770)	34 5/16"(872)	36 5/16"(922)	38 5/16"(973)	42 5/16"(1075)
ROUGH OPENING	18 3/4"(476)	20 3/4"(527)	24 3/4"(629)	28 3/4"(730)	30 3/4"(781)	32 3/4"(832)	36 3/4"(933)
FRAME SIZE	18"(457)	20"(508)	24"(610)	28"(711)	30"(762)	32"(813)	36"(914)
DAYLIGHT OPENING	11 7/8"(302)	13 7/8"(352)	17 7/8"(454)	21 7/8"(556)	23 7/8"(607)	25 7/8"(657)	29 7/8"(759)

26 1/2"(673) 28 1/2"(711) 24 1/2"(629) 44 1/2"(1130) 17 7/8"(454)							
32 1/2"(828) 34 (864) 30 1/2"(781) 39 1/2"(1007) 23 7/8"(607)							
34 1/2"(876) 36 (914) 32 1/2"(832) 37 1/2"(943) 25 7/8"(657)							
38 1/2"(978) 40 (1016) 36 1/2"(933) 37 1/2"(943) 29 7/8"(759)							
42 1/2"(1080) 44 (1118) 40 1/2"(1035) 40 1/2"(1035) 33 7/8"(866)							
44 1/2"(1130) 46 (1168) 42 1/2"(1080) 42 1/2"(1080) 35 7/8"(911)							
50 1/2"(1308) 52 (1327) 48 1/2"(1238) 48 1/2"(1238) 41 7/8"(1064)							

ELEVATION SYMBOL LEGEND:
M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT FOR FIRST FLOOR.
S STATIONARY UNIT
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
EXTENDED HALF ROUND UNITS

MO BRICKMOLD	21 1/4"(540)	23 1/4"(591)	27 1/4"(692)	31 1/4"(794)	33 1/4"(845)	35 1/4"(895)	39 1/4"(997)
MO FLAT CASING	24 5/16"(618)	26 5/16"(668)	30 5/16"(770)	34 5/16"(872)	36 5/16"(922)	38 5/16"(973)	42 5/16"(1075)
ROUGH OPENING	18 3/4"(476)	20 3/4"(527)	24 3/4"(629)	28 3/4"(730)	30 3/4"(781)	32 3/4"(832)	36 3/4"(933)
FRAME SIZE	18"(457)	20"(508)	24"(610)	28"(711)	30"(762)	32"(813)	36"(914)
DAYLIGHT OPENING	11 7/8"(302)	13 7/8"(352)	17 7/8"(454)	21 7/8"(556)	23 7/8"(607)	25 7/8"(657)	29 7/8"(759)

56 1/2"(1435) 58"(1473) 54 3/4"(1391) 54"(1372) 47 7/8"(1216)							
CCCH1854	CCCH2054	CCCH2454	CCCH2854	CCCH3054	CCCH3254	CCCH3654	
58 1/2"(1486) 60"(1524) 56 3/4"(1441) 56"(1422) 49 7/8"(1267)							
CCCH1856	CCCH2056	CCCH2456	CCCH2856	CCCH3056	CCCH3256	CCCH3656	
62 1/2"(1588) 64"(1626) 60 3/4"(1543) 60"(1524) 53 7/8"(1368)							
CCCH1860	CCCH2060	CCCH2460	CCCH2860	CCCH3060	CCCH3260	CCCH3660	
66 1/2"(1689) 68"(1727) 64 3/4"(1645) 64"(1626) 57 7/8"(1470)							
CCCH1864	CCCH2064	CCCH2464	CCCH2864	CCCH3064	CCCH3264	CCCH3664	
68 1/2"(1740) 70"(1778) 66 3/4"(1695) 66"(1676) 59 7/8"(1581)							
CCCH1868	CCCH2068	CCCH2468	CCCH2868	CCCH3068	CCCH3268	CCCH3668	

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
- E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SW. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.
- S STATIONARY UNIT
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Notes: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS
EXTENDED HALF ROUND UNITS**

	21 1/4"(540)	23 1/4"(591)	27 1/4"(692)	31 1/4"(794)	33 1/4"(845)	35 1/4"(895)	39 1/4"(997)
MO BRICKMOLD	24 5/16"(618)	26 5/16"(668)	30 5/16"(770)	34 5/16"(872)	36 5/16"(922)	38 5/16"(973)	42 5/16"(1075)
MO FLAT CASING	18 3/4"(476)	20 3/4"(527)	24 3/4"(629)	28 3/4"(730)	30 3/4"(781)	32 3/4"(832)	36 3/4"(933)
ROUGH OPENING	18"(457)	20"(508)	24"(610)	28"(711)	30"(762)	32"(813)	36"(914)
FRAME SIZE	11 7/8"(302)	13 7/8"(352)	17 7/8"(454)	21 7/8"(556)	23 7/8"(607)	25 7/8"(657)	29 7/8"(759)
DAYLIGHT OPENING							
	74 1/2"(1892)	76"(1930)	72 3/4"(1848)	72"(1829)	66 7/8"(1673)		
	CCCH1872	CCCH2072	CCCH2472	CCCH2872	CCCH3072	CCCH3272	CCCH3672
	80 1/2"(2045)	82 1/32"(2084)	78 3/4"(2000)	78"(1981)	64 3/8"(1635)		
	CCCH1878	CCCH2078	CCCH2478	CCCH2878	CCCH3078		
	86 1/2"(2197)	88 1/32"(2236)	84 3/4"(2153)	84"(2134)	70 3/8"(1788)		
	CCCH1884	CCCH2084	CCCH2484	CCCH2884	CCCH3084		

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
 E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SW. FT.
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.
 S STATIONARY UNIT
 ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS
EXTENDED QUARTER ROUND UNITS**

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

21 1/4"(540)
24 5/16"(618)
18 3/4"(476)
18"(457)
13"(330)

23 1/4"(591)
26 5/16"(668)
20 3/4"(527)
20"(508)
15"(381)

27 1/4"(692)
30 5/16"(770)
24 3/4"(629)
24"(610)
19"(483)

31 1/4"(794)
34 5/16"(872)
28 3/4"(730)
28"(711)
23"(584)

32 1/2"(828) 34"(864) 30 3/4"(781) 30"(762) 24"(610)				
34 1/2"(876) 36"(914) 32 3/4"(832) 32"(813) 26"(660)				
38 1/2"(978) 40"(1016) 36 3/4"(933) 36"(914) 30"(762)				
42 1/2"(1080) 44"(1118) 40 3/4"(1035) 40"(1016) 34"(864)				
44 1/2"(1130) 46"(1168) 42 3/4"(1086) 42"(1067) 36"(914)				
50 1/2"(1308) 52"(1321) 48 3/4"(1238) 48"(1219) 42"(1067)				
56 1/2"(1435) 58"(1473) 54 3/4"(1391) 54"(1372) 46"(1168)				

ELEVATION SYMBOL LEGEND:
M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SW. FT.
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.
S STATIONARY UNIT
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS
EXTENDED QUARTER ROUND UNITS**

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


21 1/4"(540)
24 5/16"(618)
18 3/4"(476)
18"(457)
13"(330)

23 1/4"(591)
26 5/16"(668)
20 3/4"(527)
20"(508)
15"(381)


27 1/4"(692)
30 5/16"(770)
24 3/4"(629)
24"(610)
19"(483)

31 1/4"(794)
34 5/16"(872)
28 3/4"(730)
28"(711)
23"(584)


58 1/2"(1486)
60"(1524)
56 3/4"(1441)
56"(1422)
48"(1219)




CCCQ1856



CCCQ2056




CCCQ2456




CCCQ2856


62 1/2"(1588)
64"(1626)
60 3/4"(1543)
60"(1524)
52"(1321)




CCCQ1860



CCCQ2060




CCCQ2460




CCCQ2860


66 1/2"(1689)
68"(1727)
64 3/4"(1645)
64"(1626)
56"(1422)




CCCQ1864



CCCQ2064




CCCQ2464




CCCQ2864


68 1/2"(1740)
70"(1778)
66 3/4"(1695)
66"(1676)
58"(711)




CCCQ1866



CCCQ2066



CCCQ2466



CCCQ2866

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E* BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SW. FT.
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.
S STATIONARY UNIT
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS
EXTENDED QUARTER ROUND UNITS**

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


21 1/4"(540)
24 5/16"(618)
18 3/4"(476)
18"(457)
13"(330)

23 1/4"(591)
26 5/16"(668)
20 3/4"(527)
20"(508)
15"(381)


27 1/4"(692)
30 5/16"(770)
24 3/4"(629)
24"(610)
19"(483)

31 1/4"(794)
34 5/16"(872)
28 3/4"(730)
28"(711)
23"(584)


74 1/2"(1892)
76"(1930)
72 3/4"(1848)
72"(1829)
64"(1626)




CCCQ1872



CCCQ2072




CCCQ2472




CCCQ2872


80 1/2"(2045)
82 1/32"(2084)
78 3/4"(2000)
78"(1981)
64"(1626)




CCCQ1878



CCCQ2078




CCCQ2478




CCCQ2878


86 1/2"(2187)
88 1/32"(2236)
84 3/4"(2153)
84"(2134)
70"(1778)




CCCQ1884



CCCQ2084



CCCQ2484



CCCQ2884

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
- E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SW. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.
- S STATIONARY UNIT
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
EXTENDED QUARTER ROUND UNITS


MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

33 1/4"(845)
36 5/16"(922)
30 3/4"(781)
30"(762)
25"(635)


35 1/4"(895)
38 5/16"(973)
32 3/4"(832)
32"(813)
27"(689)

39 1/4"(997)
42 5/16"(1075)
36 3/4"(933)
36"(914)
31"(787)


38 1/2"(978)
40"(1016)
36 3/4"(933)
36"(914)
30"(762)



CCCQ3032




CCCQ3232




CCCQ3632


42 1/2"(1080)
44"(1118)
40 3/4"(1035)
40"(1016)
34"(864)



CCCQ3040




CCCQ3240




CCCQ3640


44 1/2"(1130)
46"(1168)
42 3/4"(1086)
42"(1067)
36"(914)



CCCQ3042




CCCQ3242




CCCQ3642


50 1/2"(1308)
52"(1321)
48 3/4"(1238)
48"(1219)
42"(1067)



CCCQ3048




CCCQ3248




CCCQ3648


56 1/2"(1435)
58"(1473)
54 3/4"(1391)
54"(1372)
46"(1168)



CCCQ3054



CCCQ3254



CCCQ3654

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
- E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SW. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.
- S STATIONARY UNIT
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masorny Opening) for Unit Sizes. Masorny openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masorny Openings page.

**ELEVATIONS
EXTENDED QUARTER ROUND UNITS**


MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

33 1/4"(845)
36 5/16"(922)
30 3/4"(781)
30"(762)
25"(635)


35 1/4"(895)
38 5/16"(973)
32 3/4"(832)
32"(813)
27"(689)

39 1/4"(997)
42 5/16"(1075)
36 3/4"(933)
36"(914)
31"(787)


58 1/2"(1486)
60"(1524)
56 3/4"(1441)
56"(1422)
48"(1219)



CCCQ3056




CCCQ3256




CCCQ3656


62 1/2"(1588)
64"(1626)
60 3/4"(1543)
60"(1524)
52"(1321)



CCCQ3060




CCCQ3260




CCCQ3660


66 1/2"(1689)
68"(1727)
64 3/4"(1645)
64"(1626)
56"(1422)



CCCQ3064




CCCQ3264




CCCQ3664


68 1/2"(1740)
70"(1778)
66 3/4"(1695)
66"(1676)
58"(1471)



CCCQ3066



CCCQ3266



CCCQ3666

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SW. FT.
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.
S STATIONARY UNIT
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O. (Masorny Opening) for Unit Sizes. Masorny openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masorny Openings page.

**ELEVATIONS
EXTENDED QUARTER ROUND UNITS**


MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

33 1/4"(845)
36 5/16"(922)
30 3/4"(781)
30"(762)
25"(635)


35 1/4"(895)
38 5/16"(973)
32 3/4"(832)
32"(813)
27"(689)

39 1/4"(997)
42 5/16"(1075)
36 3/4"(933)
36"(914)
31"(787)


74 1/2"(1892)
76"(1930)
72 3/4"(1848)
72"(1829)
64"(1626)



CCCQ3072




CCCQ3272




CCCQ3672

80 1/2"(2045)
82 1/32"(2084)
78 3/4"(2000)
78"(1981)
64"(1626)



CCCQ3078

86 1/2"(2187)
88 1/32"(2236)
84 3/4"(2153)
84"(2134)
70"(1778)



CCCQ3084

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
E+ BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
E.1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.
S STATIONARY UNIT
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
4 WIDE BOW

MO BRICKMOLD	76 1/8"(1934)	99 11/16"(2532)	115 3/8"(2931)
MO FLAT CASING	79 3/16"(2011)	102 3/4"(2610)	118 7/16"(3008)
ROUGH OPENING	73 5/8"(1870)	97 3/16"(2489)	112 7/8"(2867)
FRAME SIZE	72 7/8"(1851)	96 7/16"(2450)	112 1/8"(2848)
DAYLIGHT OPENING	12 7/8"(327) [4]	18 3/4"(476) [4]	22 11/16"(576) [4]

42 3/8"(1076) 43 15/16"(1116) 39 13/16"(1011) 39 1/16"(992) 30 7/16"(773)			
46 3/8"(1178) 47 15/16"(1217) 43 13/16"(1113) 43 1/16"(1094) 34 7/16"(875)			
48 3/8"(1229) 49 15/16"(1268) 45 13/16"(1164) 45 1/16"(1145) 36 7/16"(926)			
54 3/8"(1381) 55 15/16"(1421) 51 13/16"(1316) 51 1/16"(1297) 42 7/16"(1078)			
60 3/8"(1534) 61 15/16"(1573) 57 13/16"(1468) 57 1/16"(1449) 48 7/16"(1230)			
62 3/8"(1584) 63 15/16"(1624) 59 13/16"(1519) 59 1/16"(1500) 50 7/16"(1281)			
66 3/8"(1676) 67 15/16"(1726) 63 13/16"(1621) 63 1/16"(1602) 54 7/16"(1383)			
70 3/8"(1788) 71 15/16"(1827) 67 13/16"(1722) 67 1/16"(1703) 58 7/16"(1484)			


ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- [] BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
- [E]* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SW. FT.
- [E1] BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
4 WIDE BOW

MO BRICKMOLD	76 1/8"(1934)	99 11/16"(2532)	115 3/8"(2931)
MO FLAT CASING	79 3/16"(2011)	102 3/4"(2610)	118 7/16"(3008)
ROUGH OPENING	73 5/8"(1870)	97 3/16"(2469)	112 7/8"(2867)
FRAME SIZE	72 7/8"(1851)	96 7/16"(2450)	112 1/8"(2848)
DAYLIGHT OPENING	12 7/8"(327) [4]	18 3/4"(476) [4]	22 11/16"(576) [4]

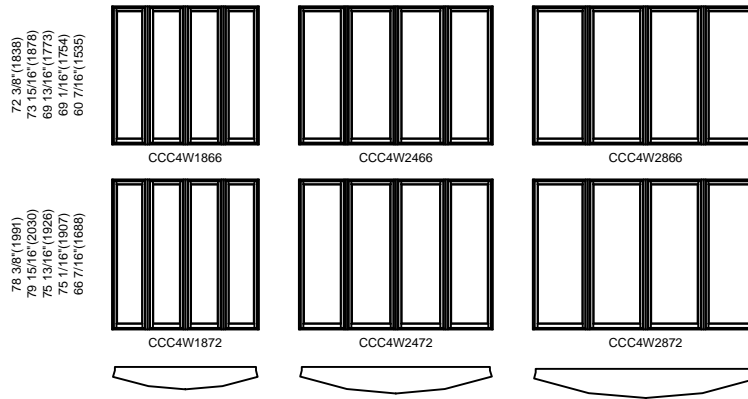

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- [] BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
- []* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SW. FT.
- [] 1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

ELEVATIONS
5 WIDE BOW

MO BRICKMOLD	93 3/16"(2367)	122 1/4"(2105)	141 5/8"(3597)
MO FLAT CASING	96 1/4"(2445)	125 5/16"(3183)	144 11/16"(3675)
ROUGH OPENING	90 11/16"(2304)	119 3/4"(3042)	139 1/8"(3534)
FRAME SIZE	89 15/16"(2284)	119"(3023)	138 3/8"(3515)
DAYLIGHT OPENING	12 11/16"(322) [5]	18 1/2"(470) [5]	22 3/8"(568) [5]
42 3/8"(1076) 43 15/16"(1116) 39 13/16"(992) 30 7/16"(773)			
46 3/8"(1178) 47 15/16"(1217) 43 13/16"(1113) 43 1/16"(1094) 34 7/16"(875)			
48 3/8"(1229) 49 15/16"(1268) 45 13/16"(1164) 45 1/16"(1145) 36 7/16"(926)			
54 3/8"(1381) 55 15/16"(1421) 51 13/16"(1316) 51 1/16"(1297) 42 7/16"(1078)			
60 3/8"(1534) 61 15/16"(1573) 57 13/16"(1468) 57 1/16"(1449) 48 7/16"(1230)			
62 3/8"(1584) 63 15/16"(1624) 59 13/16"(1519) 59 1/16"(1500) 50 7/16"(1281)			
66 3/8"(1676) 67 15/16"(1726) 63 13/16"(1621) 63 1/16"(1602) 54 7/16"(1383)			
70 3/8"(1788) 71 15/16"(1827) 67 13/16"(1722) 67 1/16"(1703) 58 7/16"(1484)			

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
 E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.
 ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
5 WIDE BOW

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

93 3/16"(2367)
96 1/4"(2445)
90 11/16"(2304)
89 15/16"(2284)
12 11/16"(322) [5]


122 1/4"(2105)
125 5/16"(3183)
119 3/4"(3042)
119"(3023)
18 1/2"(470) [5]

141 5/8"(3597)
144 11/16"(3675)
139 1/8"(3534)
138 3/8"(3515)
22 3/8"(568) [5]


72 3/8"(1838)
73 15/16"(1878)
69 13/16"(1772)
69 1/16"(1754)
60 7/16"(1535)



CCC5W1866




CCC5W2466




CCC5W2866


78 3/8"(1991)
79 15/16"(2030)
75 13/16"(1926)
75 1/16"(1907)
66 7/16"(1688)





CCC5W1872



CCC5W2472



CCC5W2872



ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SW. FT.
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
6 WIDE BOW

MO BRICKMOLD	109 1/2"(2781)	143 7/8"(3654)	166 7/8"(4239)
MO FLAT CASING	112 9/16"(2859)	146 15/16"(3732)	169 15/16"(4316)
ROUGH OPENING	107"(2718)	141 3/8"(3591)	164 3/8"(4166)
FRAME SIZE	106 1/4"(2699)	140 5/8"(3572)	163 5/8"(4156)
DAYLIGHT OPENING	12 3/8"(314) [6]	18"(457) [6]	21 7/8"(556) [6]

42 3/8"(1076) 43 15/16"(1116) 39 13/16"(1011) 39 1/16"(992) 30 7/16"(773)			
	CCC6W1836	CCC6W2436	CCC6W2836
46 3/8"(1178) 47 15/16"(1217) 43 13/16"(1113) 43 1/16"(1094) 34 7/16"(875)			
	CCC6W1840	CCC6W2440	CCC6W2840
48 3/8"(1229) 49 15/16"(1268) 45 13/16"(1164) 45 1/16"(1145) 36 7/16"(926)			
	CCC6W1842	CCC6W2442	CCC6W2842
54 3/8"(1381) 55 15/16"(1421) 51 13/16"(1316) 51 1/16"(1297) 42 7/16"(1078)			
	CCC6W1848	CCC6W2448	CCC6W2848
60 3/8"(1534) 61 15/16"(1573) 57 13/16"(1468) 57 1/16"(1449) 48 7/16"(1230)			
	CCC6W1854	CCC6W2454	CCC6W2854
62 3/8"(1584) 63 15/16"(1624) 59 13/16"(1519) 59 1/16"(1500) 50 7/16"(1281)			
	CCC6W1856	CCC6W2456	CCC6W2856
66 3/8"(1676) 67 15/16"(1726) 63 13/16"(1621) 63 1/16"(1602) 54 7/16"(1383)			
	CCC6W1860	CCC6W2460	CCC6W2860
70 3/8"(1788) 71 15/16"(1827) 67 13/16"(1722) 67 1/16"(1703) 58 7/16"(1484)			
	CCC6W1864	CCC6W2464	CCC6W2864


ELEVATION SYMBOL LEGEND:

- M.O. = MASONRY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
- BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" (12.7) from M.O. (Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
6 WIDE BOW

MO BRICKMOLD	109 1/2"(2781)	143 7/8"(3654)	166 7/8"(4239)
MO FLAT CASING	112 9/16"(2859)	146 15/16"(3732)	169 15/16"(4316)
ROUGH OPENING	107"(2718)	141 3/8"(3591)	164 3/8"(4166)
FRAME SIZE	106 1/4"(2699)	140 5/8"(3572)	163 5/8"(4156)
DAYLIGHT OPENING	12 3/8"(314) [6]	18"(457) [6]	21 7/8"(556) [6]

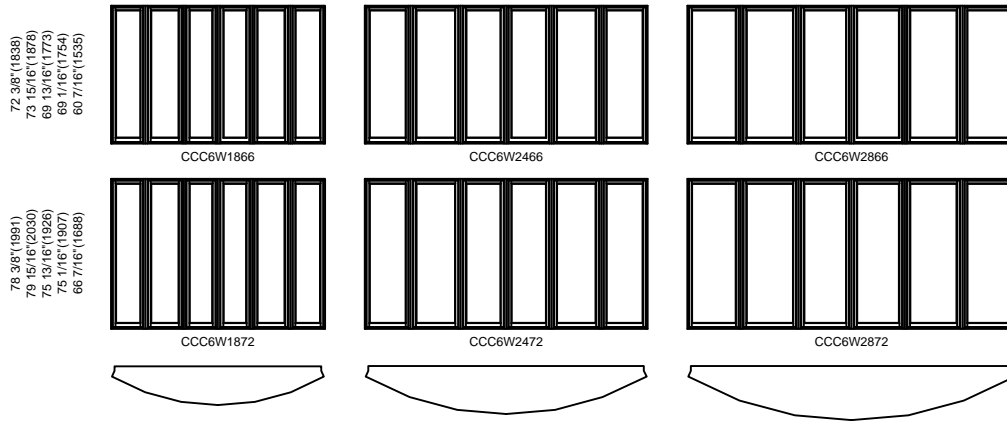

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
- E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SW. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" (12.7) from M.O. (Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
30 DEGREE BAY WITH 18" FLANKER

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

55 5/8"(1413)
58 11/16"(1491)
53 1/8"(1349)
52 3/8"(1330)
19 1/16"(484) [2]
19"(483)


73 5/8"(1870)
76 11/16"(1948)
71 1/8"(1807)
70 3/8"(1788)
19 1/16"(484) [2]
30"(762)

79 5/8"(2022)
82 11/16"(2100)
77 1/8"(1959)
76 3/8"(1940)
19 1/16"(484) [2]
36"(914)

85 5/8"(2175)
88 11/16"(2253)
83 1/8"(2111)
82 3/8"(2092)
19 1/16"(484) [2]
42"(1067)

97 5/8"(2480)
100 11/16"(2558)
95 1/8"(2416)
94 3/8"(2397)
19 1/16"(484) [2]
54"(1372)

78 3/8"(1991)
79 15/16"(2030)
75 13/16"(1926)
75 1/16"(1907)
66 7/16"(1688)




CCC3Y1872-18





CCC3Y3672-18



CCC3Y4272-18



CCC3Y4872-18



CCC3Y6072-18



ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SW. FT.
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
30 DEGREE BAY WITH 18" FLANKER

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

55 5/8"(1413)
58 11/16"(1491)
53 1/8"(1349)
52 3/8"(1330)
19 1/16"(484) [2]
19"(483)

73 5/8"(1870)
76 11/16"(1948)
71 1/8"(1807)
70 3/8"(1788)
19 1/16"(484) [2]
30"(762)

79 5/8"(2022)
82 11/16"(2100)
77 1/8"(1959)
76 3/8"(1940)
19 1/16"(484) [2]
36"(914)

85 5/8"(2175)
88 11/16"(2253)
83 1/8"(2111)
82 3/8"(2092)
19 1/16"(484) [2]
42"(1067)


97 5/8"(2490)
100 11/16"(2558)
95 1/8"(2416)
94 3/8"(2397)
19 1/16"(484) [2]
54"(1372)

109 5/8"(2785)
112 11/16"(2862)
107 1/8"(2721)
106 3/8"(2702)
19 1/16"(484) [2]
66"(1676)


42 3/8"(1076)
43 15/16"(1116)
39 13/16"(1011)
39 1/16"(992)
30 7/16"(773)



CCC3Y1836-18



CCC3Y3636-18



CCC3Y4236-18



CCC3Y4836-18



CCC3Y6036-18




CCC3Y7236-18

46 3/8"(1178)
47 15/16"(1217)
43 13/16"(1113)
43 1/16"(1094)
34 7/16"(875)



CCC3Y1840-18



CCC3Y3640-18



CCC3Y4240-18



CCC3Y4840-18



CCC3Y6040-18




CCC3Y7240-18


48 3/8"(1229)
49 15/16"(1268)
45 13/16"(1164)
45 1/16"(1145)
36 7/16"(926)



CCC3Y1842-18



CCC3Y3642-18



CCC3Y4242-18



CCC3Y4842-18



CCC3Y6042-18




CCC3Y7242-18


54 3/8"(1381)
55 15/16"(1421)
51 13/16"(1316)
51 1/16"(1297)
42 7/16"(1078)



CCC3Y1848-18



CCC3Y3648-18



CCC3Y4248-18



CCC3Y4848-18



CCC3Y6048-18



CCC3Y7248-18

60 3/8"(1534)
61 15/16"(1573)
57 13/16"(1468)
57 1/16"(1449)
48 7/16"(1230)




CCC3Y1854-18




CCC3Y3654-18




CCC3Y4254-18



CCC3Y4854-18




CCC3Y6054-18



CCC3Y7254-18

62 3/8"(1594)
63 15/16"(1634)
59 13/16"(1529)
59 1/16"(1510)
50 7/16"(1291)




CCC3Y1856-18




CCC3Y3656-18




CCC3Y4256-18



CCC3Y4856-18



CCC3Y6056-18



CCC3Y7256-18

66 3/8"(1676)
67 15/16"(1726)
63 13/16"(1621)
63 1/16"(1602)
54 7/16"(1383)



CCC3Y1860-18



CCC3Y3660-18




CCC3Y4260-18



CCC3Y4860-18




CCC3Y6060-18



CCC3Y7260-18

70 3/8"(1788)
71 15/16"(1827)
67 13/16"(1722)
67 1/16"(1703)
58 7/16"(1484)



CCC3Y1864-18



CCC3Y3664-18



CCC3Y4264-18



CCC3Y4864-18



CCC3Y6064-18



CCC3Y7260-18

72 3/8"(1838)
73 15/16"(1878)
69 13/16"(1773)
69 1/16"(1754)
60 7/16"(1535)




CCC3Y1866-18



CCC3Y3666-18



CCC3Y4266-18



CCC3Y4866-18



CCC3Y6066-18



CCC3Y1866-18



CCC3Y3666-18



CCC3Y4266-18



CCC3Y4866-18



CCC3Y6066-18

ELEVATION SYMBOL LEGEND:

- M.O. = MASONRY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
- E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SW. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS
30 DEGREE BAY WITH 24" FLANKER**

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

72 1/16"(1830)
75 1/8"(1908)
69 9/16"(1767)
68 13/16"(1748)
16"(406) [2]
20 3/16"(513)


84 1/16"(2135)
87 1/8"(2213)
81 9/16"(2072)
80 13/16"(2053)
16"(406) [2]
32 3/16"(818)

90 1/16"(2288)
93 1/8"(2365)
87 9/16"(2224)
86 13/16"(2205)
16"(406) [2]
38 3/16"(971)

96 1/16"(2440)
99 1/8"(2518)
93 9/16"(2377)
92 13/16"(2342)
16"(406) [2]
44 3/16"(1122)

108 1/16"(2745)
111 1/8"(2823)
105 9/16"(2681)
104 13/16"(2662)
16"(406) [2]
56 3/16"(1427)

42 3/8"(1076)
43 15/16"(1116)
39 13/16"(1011)
39 1/16"(992)
30 7/16"(773)



CCC3Y2436-24



CCC3Y3636-24



CCC3Y4236-24



CCC3Y4836-24




CCC3Y6036-24


46 3/8"(1178)
47 15/16"(1217)
43 13/16"(1113)
43 1/16"(1094)
34 7/16"(875)



CCC3Y2440-24



CCC3Y3640-24



CCC3Y4240-24



CCC3Y4840-24




CCC3Y6040-24


48 3/8"(1229)
49 15/16"(1268)
45 13/16"(1164)
45 1/16"(1145)
36 7/16"(926)



CCC3Y2442-24



CCC3Y3642-24



CCC3Y4242-24



CCC3Y4842-24




CCC3Y6042-24

54 3/8"(1381)
55 15/16"(1421)
51 13/16"(1316)
51 1/16"(1297)
42 7/16"(1078)



CCC3Y2448-24



CCC3Y3648-24



CCC3Y4248-24



CCC3Y4848-24




CCC3Y6048-24

60 3/8"(1534)
61 15/16"(1573)
57 13/16"(1468)
57 1/16"(1449)
48 7/16"(1230)



CCC3Y2454-24




CCC3Y3654-24



CCC3Y4254-24



CCC3Y4854-24



CCC3Y6054-24

62 3/8"(1584)
63 15/16"(1624)
59 13/16"(1519)
59 1/16"(1500)
50 7/16"(1281)




CCC3Y2456-24




CCC3Y3656-24



CCC3Y4256-24



CCC3Y4856-24



CCC3Y6056-24

66 3/8"(1676)
67 15/16"(1726)
63 13/16"(1621)
63 1/16"(1602)
54 7/16"(1383)




CCC3Y2460-24




CCC3Y3660-24



CCC3Y4260-24



CCC3Y4860-24




CCC3Y6060-24

70 3/8"(1788)
71 15/16"(1827)
67 13/16"(1722)
67 1/16"(1703)
58 7/16"(1494)



CCC3Y2464-24



CCC3Y3664-24



CCC3Y4264-24



CCC3Y4864-24




CCC3Y6064-24

72 3/8"(1838)
73 15/16"(1878)
69 13/16"(1773)
69 1/16"(1754)
60 7/16"(1535)



CCC3Y2466-24



CCC3Y3666-24




CCC3Y4266-24



CCC3Y4866-24



CCC3Y6066-24



ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
- E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SW. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS
30 DEGREE BAY WITH 24" FLANKER**

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

72 1/16"(1830)
75 1/8"(1908)
69 9/16"(1767)
68 13/16"(1748)
16"(406) [2]
20 3/16"(513)

84 1/16"(2135)
87 1/8"(2213)
81 9/16"(2072)
80 13/16"(2053)
16"(406) [2]
32 3/16"(818)

90 1/16"(2288)
93 1/8"(2365)
87 9/16"(2224)
86 13/16"(2205)
16"(406) [2]
38 3/16"(971)

96 1/16"(2440)
99 1/8"(2518)
93 9/16"(2377)
92 13/16"(2342)
16"(406) [2]
44 3/16"(1122)

108 1/16"(2745)
111 1/8"(2823)
105 9/16"(2681)
104 13/16"(2662)
16"(406) [2]
56 3/16"(1427)


78 3/8"(1991)
79 15/16"(2030)
75 13/16"(1926)
75 1/16"(1907)
66 7/16"(1688)




CCC3Y2472-24




CCC3Y3672-24








CCC3Y4272-24



CCC3Y4872-24



CCC3Y6072-24



MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

120 1/16"(3050)
123 1/8"(3127)
117 9/16"(2986)
116 13/16"(2967)
16"(406) [2]
68 3/16"(1732)

42 3/8"(1076)
43 15/16"(1116)
39 13/16"(1011)
39 1/16"(992)
30 7/16"(773)



CCC3Y7236-24

46 3/8"(1178)
47 15/16"(1217)
43 13/16"(1113)
43 1/16"(1094)
34 7/16"(875)



CCC3Y7240-24

48 3/8"(1229)
49 15/16"(1268)
45 13/16"(1164)
45 1/16"(1145)
36 7/16"(926)



CCC3Y7242-24

54 3/8"(1381)
55 15/16"(1421)
51 13/16"(1316)
51 1/16"(1287)
42 7/16"(1078)




CCC3Y7248-24

60 3/8"(1534)
61 15/16"(1573)
57 13/16"(1468)
57 1/16"(1449)
48 7/16"(1230)




CCC3Y7254-24

62 3/8"(1584)
63 15/16"(1624)
59 13/16"(1519)
59 1/16"(1500)
50 7/16"(1281)



CCC3Y7256-24

66 3/8"(1676)
67 15/16"(1726)
63 13/16"(1621)
63 1/16"(1602)
54 7/16"(1383)



CCC3Y7260-24



ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING

VALUES IN () ARE IN MILLIMETER CONVERSIONS

VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.

E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SW. FT.

E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.

NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O. (Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS 30 DEGREE BAY WITH 28" FLANKER

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

82 15/16"(2107)
86"(2184)
80 7/16"(2043)
79 11/16"(2024)
19 7/8"(505) [2]
24 1/8"(603)


90 15/16"(2310)
94"(2388)
88 7/16"(2246)
87 11/16"(2227)
19 7/8"(505) [2]
32 1/8"(816)

96 15/16"(2462)
100"(2540)
94 7/16"(2399)
93 11/16"(2380)
19 7/8"(505) [2]
38 1/8"(968)


102 15/16"(2615)
106"(2692)
100 7/16"(2551)
99 11/16"(2532)
19 7/8"(505) [2]
44 1/8"(1121)

114 15/16"(2919)
118"(2997)
112 7/16"(2856)
111 11/16"(2837)
19 7/8"(505) [2]
56 1/8"(1426)


42 3/8"(1076)
43 15/16"(1116)
39 3/4"(1002)
38 7/16"(973)




CCC3Y2836-28



CCC3Y3636-28



CCC3Y4236-28




CCC3Y4836-28




CCC3Y6036-28

46 3/8"(1176)
47 15/16"(1217)
43 1/2"(1103)
43 7/16"(1095)




CCC3Y2840-28



CCC3Y3640-28



CCC3Y4240-28




CCC3Y4840-28




CCC3Y6040-28

48 3/8"(1229)
48 15/16"(1268)
44 1/2"(1154)
44 7/16"(1146)




CCC3Y2842-28



CCC3Y3642-28



CCC3Y4242-28




CCC3Y4842-28




CCC3Y6042-28

54 3/8"(1381)
55 15/16"(1421)
51 1/2"(1307)
51 7/16"(1299)



CCC3Y2848-28



CCC3Y3648-28



CCC3Y4248-28



CCC3Y4848-28




CCC3Y6048-28

60 3/8"(1534)
61 15/16"(1573)
57 1/2"(1459)
57 7/16"(1451)




CCC3Y2854-28




CCC3Y3654-28



CCC3Y4254-28



CCC3Y4854-28



CCC3Y6054-28

62 3/8"(1584)
63 15/16"(1624)
59 1/2"(1510)
59 7/16"(1502)



CCC3Y2856-28



CCC3Y3656-28



CCC3Y4256-28



CCC3Y4856-28



CCC3Y6056-28

66 3/8"(1676)
67 15/16"(1726)
63 1/2"(1612)
63 7/16"(1604)



CCC3Y2860-28




CCC3Y3660-28



CCC3Y4260-28




CCC3Y4860-28




CCC3Y6060-28


70 3/8"(1788)
71 15/16"(1827)
67 1/2"(1713)
67 7/16"(1705)



CCC3Y2864-28



CCC3Y3664-28



CCC3Y4264-28



CCC3Y4864-28



CCC3Y6064-28

72 3/8"(1838)
73 15/16"(1878)
69 1/2"(1764)
69 7/16"(1756)



CCC3Y2866-28



CCC3Y3666-28







CCC3Y4266-28



CCC3Y4866-28



CCC3Y6066-28



ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING

VALUES IN () ARE IN MILLIMETER CONVERSIONS

VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.

E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SW. FT.

E-1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.

NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
30 DEGREE BAY WITH 28" FLANKER

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

82 15/16"(2107)
86"(2184)
80 7/16"(2043)
79 11/16"(2024)
19 7/8"(505) [2]
24 1/8"(603)

90 15/16"(2310)
94"(2388)
88 7/16"(2246)
87 11/16"(2227)
19 7/8"(505) [2]
32 1/8"(816)

96 15/16"(2462)
100"(2540)
94 7/16"(2399)
93 11/16"(2380)
19 7/8"(505) [2]
38 1/8"(968)



102 15/16"(2615)
106"(2692)
100 7/16"(2551)
99 11/16"(2532)
19 7/8"(505) [2]
44 1/8"(1121)

114 15/16"(2919)
118"(2997)
112 7/16"(2856)
111 11/16"(2837)
19 7/8"(505) [2]
56 1/8"(1426)



78 3/8"(1981)
79 15/16"(2030)
75 13/16"(1926)
75 1/16"(1907)
66 7/16"(1688)





CCC3Y2872-28





CCC3Y3672-28




CCC3Y4272-28



CCC3Y4872-28



CCC3Y6072-28



MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

126 15/16"(3224)
130"(3302)
124 7/16"(3161)
123 11/16"(3142)
19 7/8"(505) [2]
68 1/8"(1730)

42 3/8"(1076)
43 15/16"(1116)
39 13/16"(1011)
39 1/16"(992)
30 7/16"(773)



CCC3Y7236-28

46 3/8"(1178)
47 15/16"(1217)
43 13/16"(1113)
43 1/16"(1094)
34 7/16"(875)



CCC3Y7240-28

48 3/8"(1229)
49 15/16"(1268)
45 13/16"(1164)
45 1/16"(1145)
36 7/16"(926)



CCC3Y7242-28

54 3/8"(1381)
55 15/16"(1421)
51 13/16"(1316)
51 1/16"(1297)
42 7/16"(1078)



CCC3Y7248-28

60 3/8"(1534)
61 15/16"(1573)
57 13/16"(1468)
57 1/16"(1449)
48 7/16"(1230)



CCC3Y7254-28

62 3/8"(1584)
63 15/16"(1624)
59 13/16"(1519)
59 1/16"(1500)
50 7/16"(1281)




CCC3Y7256-28

66 3/8"(1676)
67 15/16"(1726)
63 13/16"(1621)
63 1/16"(1602)
54 7/16"(1383)



CCC3Y7260-28



ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING

VALUES IN () ARE IN MILLIMETER CONVERSIONS

VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.


















































E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SW. FT.

E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.

NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS
45 DEGREE BAY WITH 18" FLANKER**

MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	50 1/16"(1272) 53 1/8"(1349) 47 9/16"(1208) 46 13/16"(1189) 9 1/16"(230) [2] 13 3/4"(349)	68 1/16"(1729) 71 1/8"(1807) 65 9/16"(1665) 64 13/16"(1646) 9 1/16"(230) [2] 31 3/4"(807)	74 1/16"(1881) 77 1/8"(1959) 71 9/16"(1818) 70 13/16"(1799) 9 1/16"(230) [2] 37 3/4"(959)	80 1/16"(2034) 83 1/8"(2111) 77 9/16"(1970) 76 13/16"(1951) 9 1/16"(230) [2] 43 3/4"(1111)	92 1/16"(2338) 95 1/8"(2416) 89 9/16"(2275) 88 13/16"(2256) 9 1/16"(230) [2] 55 3/4"(1416)	104 1/16"(2643) 107 1/8"(2721) 101 9/16"(2580) 100 13/16"(2561) 9 1/16"(230) [2] 67 3/4"(1721)	
42 3/8"(1076) 43 15/16"(1116) 39 13/16"(1011) 39 1/16"(992) 30 7/16"(773)							
	CCC4Y1836-18	CCC4Y3636-18	CCC4Y4236-18	CCC4Y4836-18	CCC4Y6036-18	CCC4Y7236-18	
46 3/8"(1178) 47 15/16"(1217) 43 13/16"(1113) 43 1/16"(1094) 34 7/16"(875)							
	CCC4Y1840-18	CCC4Y3640-18	CCC4Y4240-18	CCC4Y4840-18	CCC4Y6040-18	CCC4Y7240-18	
48 3/8"(1229) 49 15/16"(1268) 45 13/16"(1164) 45 1/16"(1145) 36 7/16"(926)							
	CCC4Y1842-18	CCC4Y3642-18	CCC4Y4242-18	CCC4Y4842-18	CCC4Y6042-18	CCC4Y7242-18	
54 3/8"(1381) 55 15/16"(1421) 51 13/16"(1316) 51 1/16"(1297) 42 7/16"(1078)							
	CCC4Y1848-18	CCC4Y3648-18	CCC4Y4248-18	CCC4Y4848-18	CCC4Y6048-18	CCC4Y7248-18	
60 3/8"(1534) 61 15/16"(1573) 57 13/16"(1468) 57 1/16"(1449) 48 7/16"(1230)							
	CCC4Y1854-18	CCC4Y3654-18	CCC4Y4254-18	CCC4Y4854-18	CCC4Y6054-18	CCC4Y7254-18	
62 3/8"(1584) 63 15/16"(1624) 59 13/16"(1519) 59 1/16"(1500) 50 7/16"(1281)							
	CCC4Y1856-18	CCC4Y3656-18	CCC4Y4256-18	CCC4Y4856-18	CCC4Y6056-18	CCC4Y7256-18	
66 3/8"(1678) 67 15/16"(1726) 63 13/16"(1621) 63 1/16"(1602) 54 7/16"(1383)							
	CCC4Y1860-18	CCC4Y3660-18	CCC4Y4260-18	CCC4Y4860-18	CCC4Y6060-18	CCC4Y7260-18	

ELEVATION SYMBOL LEGEND:
M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
E 1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS
45 DEGREE BAY WITH 18" FLANKER**

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

50 1/16"(1272)
53 1/8"(1349)
47 9/16"(1208)
46 13/16"(1189)
9 1/16"(230) [2]
13 3/4"(349)


68 1/16"(1729)
71 1/8"(1807)
65 9/16"(1665)
64 13/16"(1646)
9 1/16"(230) [2]
31 3/4"(807)

74 1/16"(1881)
77 1/8"(1959)
71 9/16"(1818)
70 13/16"(1799)
9 1/16"(230) [2]
37 3/4"(959)


80 1/16"(2034)
83 1/8"(2111)
77 9/16"(1970)
76 13/16"(1951)
9 1/16"(230) [2]
43 3/4"(1111)

92 1/16"(2338)
95 1/8"(2416)
89 9/16"(2275)
88 13/16"(2256)
9 1/16"(230) [2]
55 3/4"(1416)

70 3/8"(1788)
71 15/16"(1827)
67 13/16"(1723)
67 1/16"(1703)
58 7/16"(1484)




CCC4Y1864-18




CCC4Y3664-18



CCC4Y4264-18




CCC4Y4864-18



CCC4Y6064-18

72 3/8"(1838)
73 15/16"(1878)
69 13/16"(1773)
69 1/16"(1754)
60 7/16"(1535)




CCC4Y1866-18




CCC4Y3666-18



CCC4Y4266-18




CCC4Y4866-18




CCC4Y6066-18


78 3/8"(1991)
79 15/16"(2030)
75 13/16"(1926)
75 1/16"(1907)
66 7/16"(1688)




CCC4Y1872-18




CCC4Y3672-18







CCC4Y4272-18



CCC4Y4872-18



CCC4Y6072-18



ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SW. FT.
E 1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
45 DEGREE BAY WITH 24" FLANKER

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

64 9/16"(1640)
67 5/8"(1718)
62 1/16"(1576)
61 5/16"(1557)
13 5/16"(338) [2]
19 3/4"(502)


76 9/16"(1945)
79 5/8"(2023)
74 1/16"(1881)
73 5/16"(1862)
13 5/16"(338) [2]
31 3/4"(807)

82 9/16"(2097)
85 5/8"(2175)
80 1/16"(2034)
79 5/16"(2015)
13 5/16"(338) [2]
37 3/4"(959)


88 9/16"(2250)
91 5/8"(2327)
86 1/16"(2186)
85 5/16"(2167)
13 5/16"(338) [2]
43 3/4"(1111)

100 9/16"(2554)
103 5/8"(2632)
98 1/16"(2491)
97 5/16"(2472)
13 5/16"(338) [2]
55 3/4"(1416)

42 3/8"(1076)
43 15/16"(1116)
39 13/16"(1011)
39 1/16"(982)
30 7/16"(773)



CCC4Y2436-24



CCC4Y3636-24



CCC4Y4236-24



CCC4Y4836-24



CCC4Y6036-24

46 3/8"(1178)
47 15/16"(1217)
43 13/16"(1113)
43 1/16"(1094)
34 7/16"(875)



CCC4Y2440-24



CCC4Y3640-24



CCC4Y4240-24




CCC4Y4840-24




CCC4Y6040-24

48 3/8"(1229)
49 15/16"(1268)
45 13/16"(1164)
45 1/16"(1145)
36 7/16"(926)



CCC4Y2442-24



CCC4Y3642-24



CCC4Y4242-24




CCC4Y4842-24




CCC4Y6042-24

54 3/8"(1381)
55 15/16"(1421)
51 13/16"(1316)
51 1/16"(1297)
42 7/16"(1078)



CCC4Y2448-24



CCC4Y3648-24



CCC4Y4248-24




CCC4Y4848-24




CCC4Y6048-24

60 3/8"(1534)
61 15/16"(1573)
57 13/16"(1468)
57 1/16"(1449)
48 7/16"(1230)



CCC4Y2454-24



CCC4Y3654-24



CCC4Y4254-24




CCC4Y4854-24



CCC4Y6054-24

62 3/8"(1584)
63 15/16"(1624)
59 13/16"(1519)
59 1/16"(1500)
50 7/16"(1281)



CCC4Y2456-24



CCC4Y3656-24



CCC4Y4256-24




CCC4Y4856-24




CCC4Y6056-24

66 3/8"(1676)
67 15/16"(1726)
63 13/16"(1621)
63 1/16"(1602)
54 7/16"(1383)



CCC4Y2460-24



CCC4Y3660-24



CCC4Y4260-24



CCC4Y4860-24




CCC4Y6060-24

70 3/8"(1788)
71 15/16"(1827)
67 13/16"(1722)
67 1/16"(1703)
58 7/16"(1484)




CCC4Y2464-24



CCC4Y3664-24



CCC4Y4264-24



CCC4Y4864-24



CCC4Y6064-24


72 3/8"(1838)
73 15/16"(1877)
69 13/16"(1772)
69 1/16"(1754)
60 7/16"(1535)




CCC4Y2466-24




CCC4Y3666-24




CCC4Y4266-24



CCC4Y4866-24



CCC4Y6066-24



ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
- E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SW. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" (12.7) from M.O. (Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
45 DEGREE BAY WITH 24" FLANKER

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

64 9/16"(1640)
67 5/8"(1718)
62 1/16"(1576)
61 5/16"(1557)
13 5/16"(338) [2]
19 3/4"(502)


76 9/16"(1945)
79 5/8"(2023)
74 1/16"(1881)
73 5/16"(1862)
13 5/16"(338) [2]
31 3/4"(807)

82 9/16"(2097)
85 5/8"(2175)
80 1/16"(2034)
79 5/16"(2015)
13 5/16"(338) [2]
37 3/4"(959)


88 9/16"(2250)
91 5/8"(2327)
86 1/16"(2186)
85 5/16"(2167)
13 5/16"(338) [2]
43 3/4"(1111)

100 9/16"(2554)
103 5/8"(2632)
98 1/16"(2491)
97 5/16"(2472)
13 5/16"(338) [2]
55 3/4"(1416)

78 3/8"(1991)
79 15/16"(2030)
75 13/16"(1926)
75 1/16"(1907)
66 7/16"(1688)




CCC4Y2466-24




CCC4Y3666-24








CCC4Y4266-24



CCC4Y4866-24



CCC4Y6066-24



MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

112 9/16"(2859)
115 5/8"(2937)
110 1/16"(2796)
109 5/16"(2777)
13 5/16"(338) [2]
67 3/4"(1721)

42 3/8"(1076)
43 1/16"(1101)
39 13/16"(1011)
39 1/8"(992)
30 7/16"(775)



CCC4Y7236-24

46 3/8"(1178)
47 1/16"(1197)
43 13/16"(1117)
43 1/16"(1094)
34 7/16"(875)



CCC4Y7240-24

48 3/8"(1229)
49 1/16"(1248)
45 13/16"(1168)
45 1/16"(1145)
36 7/16"(926)



CCC4Y7242-24

54 3/8"(1381)
54 5/8"(1401)
51 13/16"(1321)
51 1/16"(1297)
42 7/16"(1076)



CCC4Y7248-24

60 3/8"(1534)
61 5/8"(1573)
57 13/16"(1468)
57 1/16"(1446)
48 7/16"(1233)



CCC4Y7254-24

62 3/8"(1584)
63 15/16"(1623)
59 13/16"(1509)
59 1/16"(1486)
50 7/16"(1281)



CCC4Y7256-24

66 3/8"(1676)
67 1/16"(1726)
63 13/16"(1602)
63 1/16"(1583)
54 7/16"(1383)



CCC4Y7260-24



ELEVATION SYMBOL LEGEND:
M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SW. FT.
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
45 DEGREE BAY WITH 28" FLANKER

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

74 1/4"(1886)
77 5/16"(1964)
71 3/4"(1823)
71"(1803)
16 1/8"(410) [2]
23 3/4"(603)

82 1/4"(2089)
85 5/16"(2167)
79 3/4"(2026)
79"(2007)
16 1/8"(410) [2]
31 3/4"(807)

88 1/4"(2252)
91 5/16"(2319)
85 3/4"(2178)
85"(2159)
16 1/8"(410) [2]
37 3/4"(959)

94 1/4"(2394)
97 5/16"(2472)
91 3/4"(2331)
91"(2311)
16 1/8"(410) [2]
43 3/4"(1111)

106 1/4"(2699)
109 5/16"(2777)
103 3/4"(2635)
103"(2616)
16 1/8"(410) [2]
55 3/4"(1416)

42 3/8"(1076) 43 15/16"(1116) 39 13/16"(1011) 39 1/16"(982) 30 7/16"(773)					
CCC4Y2836-28	CCC4Y3636-28	CCC4Y4236-28	CCC4Y4836-28	CCC4Y6036-28	
46 3/8"(1178) 47 15/16"(1217) 43 13/16"(1113) 43 1/16"(1094) 34 7/16"(875)					
CCC4Y2840-28	CCC4Y3640-28	CCC4Y4240-28	CCC4Y4840-28	CCC4Y6040-28	
48 3/8"(1229) 49 15/16"(1268) 45 13/16"(1164) 45 1/16"(1145) 36 7/16"(926)					
CCC4Y2842-28	CCC4Y3642-28	CCC4Y4242-28	CCC4Y4842-28	CCC4Y6042-28	
54 3/8"(1381) 55 15/16"(1421) 51 13/16"(1316) 51 1/16"(1297) 42 7/16"(1078)					
CCC4Y2848-28	CCC4Y3648-28	CCC4Y4248-28	CCC4Y4848-28	CCC4Y6048-28	
60 3/8"(1534) 61 15/16"(1573) 57 13/16"(1468) 57 1/16"(1449) 48 7/16"(1230)					
CCC4Y2854-28	CCC4Y3654-28	CCC4Y4254-28	CCC4Y4854-28	CCC4Y6054-28	
62 3/8"(1584) 63 15/16"(1624) 59 13/16"(1519) 59 1/16"(1500) 50 7/16"(1281)					
CCC4Y2856-28	CCC4Y3656-28	CCC4Y4256-28	CCC4Y4856-28	CCC4Y6056-28	
66 3/8"(1676) 67 15/16"(1726) 63 13/16"(1621) 63 1/16"(1602) 54 7/16"(1383)					
CCC4Y2860-28	CCC4Y3660-28	CCC4Y4260-28	CCC4Y4860-28	CCC4Y6060-28	
70 3/8"(1788) 71 15/16"(1827) 67 13/16"(1722) 67 1/16"(1703) 58 7/16"(1484)					
CCC4Y2864-28	CCC4Y3664-28	CCC4Y4264-28	CCC4Y4864-28	CCC4Y6064-28	
72 3/8"(1838) 73 15/16"(1878) 69 13/16"(1773) 69 1/16"(1754) 60 7/16"(1535)					
CCC4Y2866-28	CCC4Y3666-28	CCC4Y4266-28	CCC4Y4866-28	CCC4Y6066-28	

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
45 DEGREE BAY WITH 28" FLANKER

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

74 1/4"(1886)
77 5/16"(1964)
71 3/4"(1823)
71"(1803)
16 1/8"(410) [2]
23 3/4"(603)


82 1/4"(2089)
85 5/16"(2167)
79 3/4"(2026)
79"(2007)
16 1/8"(410) [2]
31 3/4"(807)

88 1/4"(2252)
91 5/16"(2319)
85 3/4"(2178)
85"(2159)
16 1/8"(410) [2]
37 3/4"(959)

94 1/4"(2394)
97 5/16"(2472)
91 3/4"(2331)
91"(2311)
16 1/8"(410) [2]
43 3/4"(1111)

106 1/4"(2699)
109 5/16"(2777)
103 3/4"(2635)
103"(2616)
16 1/8"(410) [2]
55 3/4"(1416)



78 3/8"(1991)
79 15/16"(2030)
75 13/16"(1926)
75 1/16"(1907)
66 7/16"(1688)





CCC4Y2872-28





CCC4Y3672-28




CCC4Y4272-28



CCC4Y4872-28



CCC4Y6072-28



MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

118 1/4"(3004)
121 5/16"(3081)
115 3/4"(2940)
115"(2921)
16 1/8"(410) [2]
67 3/4"(1721)

42 3/8"(1076)
43 5/16"(1116)
39 13/16"(1011)
39 1/16"(992)
30 7/16"(773)



CCC4Y7236-28

46 3/8"(1178)
47 15/16"(1217)
43 13/16"(1113)
43 1/16"(1094)
34 7/16"(875)



CCC4Y7240-28

48 3/8"(1220)
49 5/16"(1258)
45 13/16"(1164)
45 1/16"(1145)
38 7/16"(926)



CCC4Y7242-28

54 3/8"(1381)
55 15/16"(1421)
51 13/16"(1316)
51 1/16"(1297)
42 7/16"(1078)



CCC4Y7248-28

60 3/8"(1534)
61 15/16"(1573)
57 13/16"(1468)
57 1/16"(1449)
48 7/16"(1230)



CCC4Y7254-28

62 3/8"(1584)
63 5/16"(1624)
59 13/16"(1519)
59 1/16"(1500)
50 7/16"(1281)




CCC4Y7256-28

66 3/8"(1676)
67 15/16"(1726)
63 13/16"(1621)
63 1/16"(1602)
54 7/16"(1383)



CCC4Y7260-28



ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR SECOND FLOOR AND ABOVE.
E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SW. FT.
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ FT FOR FIRST FLOOR.
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.