
ELEVATIONS TABLE OF CONTENTS

Swinging Door Units	21-30
French Units	21-36
Single Door with Single Sidelite	31-40
Single Door with Two Sidelites	21-41
French Door with Two Sidelites	21-42
Transom Units	21-46
Sector Top Doors	21-51
French Sector Top Doors	21-53
French Sector Top Doors with Two Sidelites	21-56
Sector Top Transom Units	21-60

ELEVATIONS
1- PANEL UNITS

M.O. Brickmould	16 13/16" [427]	18 13/16" [478]	20 13/16" [529]	28 11/16" [729]	34 11/16" [881]	36 11/16" [932]	40 11/16" [1033]	46 11/16" [1186]
M.O. Adams/Flat Casing	19 7/8" [505]	21 7/8" [556]	23 7/8" [606]	31 3/4" [806]	37 3/4" [959]	39 3/4" [1010]	43 3/4" [1111]	49 3/4" [1264]
Rough Opening	14 5/16" [364]	16 5/16" [414]	18 5/16" [465]	26 3/16" [665]	32 3/16" [818]	34 3/16" [868]	38 3/16" [970]	44 3/16" [1122]
Frame Size	13 9/16" [344]	15 9/16" [395]	17 9/16" [446]	25 7/16" [646]	31 7/16" [799]	33 7/16" [849]	37 7/16" [951]	43 7/16" [1103]
Daylight Opening	7 1/2" [190]	9 1/2" [241]	11 1/2" [292]	14 5/8" [371]	20 5/8" [524]	22 5/8" [575]	26 5/8" [676]	32 5/8" [829]
84 3/8" [2143] 85 7/8" [2181] 83 1/4" [2115] 82 1/2" [2096] 68 11/16" [1746]								
88 3/8" [2245] 89 7/8" [2283] 87 1/4" [2216] 86 1/2" [2197] 72 11/16" [1846]								
100 3/8" [2550] 101 7/8" [2588] 99 1/4" [2521] 98 1/2" [2502] 84 11/16" [2151]								
112 3/8" [2854] 113 7/8" [2892] 111 1/4" [2826] 110 1/2" [2807] 96 11/16" [2456]								

ELEVATION SYMBOL LEGEND:

(F) PANEL IS AVAILABLE AS FIXED ONLY


NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.

M.O. = MASONRY OPENING
VALUES IN [] ARE MILLIMETER CONVERSIONS
VALUES IN () ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" [12.7] from M.O. (Masonry Opening) for Unit Size. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Openings & Masonry Openings page.

ELEVATIONS
1- PANEL UNITS

M.O. Brickmould	26 11/16" [678]	32 11/16" [830]	34 11/16" [881]	38 11/16" [983]
M.O. Adams/Flat Casing	29 3/4" [756]	35 3/4" [908]	37 3/4" [959]	41 3/4" [1060]
Rough Opening	24 3/16" [614]	30 3/16" [767]	32 3/16" [818]	36 3/16" [919]
Frame Size	23 7/16" [595]	29 7/16" [748]	31 7/16" [799]	35 7/16" [900]
Daylight Opening	12 5/8" [321]	18 5/8" [473]	20 5/8" [524]	24 5/8" [625]

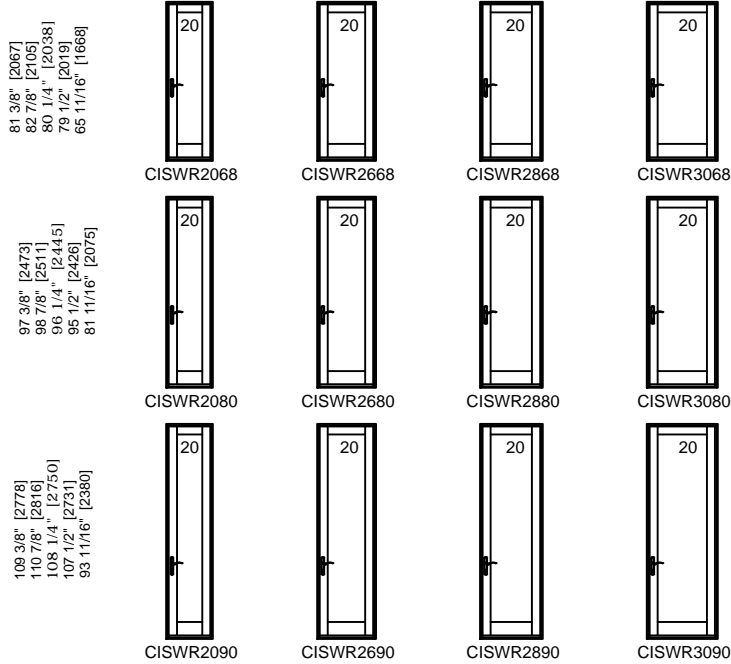

ELEVATION SYMBOL LEGEND:

- F** PANEL IS AVAILABLE AS FIXED ONLY
- #** NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.
- M.O. = MASONRY OPENING
- VALUES IN [] ARE MILLIMETER CONVERSIONS
- VALUES IN () ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" [12.7] from M.O. (Masonry Opening) for Unit Size. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Openings & Masonry Openings page.

ELEVATIONS 2-PANEL UNITS


M.O. Brickmould 65 7/8" [1673]
M.O. Adams/Flat Casing 68 15/16" [1751]
Rough Opening 63 3/8" [1610]
Frame Size 62 5/8" [1591]
Daylight Opening 20 5/8" [524] (2)

69 7/8" [1775]
72 15/16" [1853]
67 3/8" [1711]
66 5/8" [1692]
22 5/8" [575] (2)


77 7/8" [1978]
80 15/16" [2056]
75 3/8" [1915]
74 5/8" [1895]
26 5/8" [676] (2)

89 7/8" [2283]
92 15/16" [2361]
87 3/8" [2219]
86 5/8" [2200]
32 5/8" [829] (2)


84 3/8" [2143]
85 7/8" [2181]
83 1/4" [2115]
82 1/2" [2096]
68 11/16" [1745]




CISWT5068



CISWT5468




CISWT6068




CISWT7068


88 3/8" [2245]
89 7/8" [2283]
87 1/4" [2216]
86 1/2" [2197]
72 11/16" [1846]




CISWT5070



CISWT5470




CISWT6070




CISWT7070


100 3/8" [2550]
101 7/8" [2588]
99 1/4" [2521]
98 1/2" [2502]
84 11/16" [2151]




CISWT5080



CISWT5480




CISWT6080




CISWT7080


112 3/8" [2854]
113 7/8" [2892]
111 1/4" [2826]
110 1/2" [2807]
96 11/16" [2456]



CISWT5090



CISWT5490



CISWT6090

ELEVATION SYMBOL LEGEND:

(F) PANEL IS AVAILABLE AS FIXED ONLY

NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.

M.O. = MASONRY OPENING
VALUES IN [] ARE MILLIMETER CONVERSIONS
VALUES IN () ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" [12.7] from M.O. (Masonry Opening) for Unit Size. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Openings & Masonry Openings page.

ELEVATIONS
2-PANEL UNITS


M.O. Brickmould
M.O. Adams/Flat Casing
Rough Opening
Frame Size
Daylight Opening

61 7/8" [1572]
64 15/16" [1649]
59 3/8" [1508]
58 5/8" [1489]
18 5/8" [473] (2)


65 7/8" [1673]
68 15/16" [1751]
63 3/8" [1610]
62 5/8" [1591]
20 5/8" [524] (2)

73 7/8" [1876]
76 15/16" [1954]
71 3/8" [1813]
70 5/8" [1794]
24 5/8" [625] (2)


81 3/8" [2067]
82 7/8" [2105]
80 1/4" [2038]
79 1/2" [2019]
65 11/16" [1668]



CISWR5068




CISWR5468




CISWR6068


97 3/8" [2473]
98 7/8" [2511]
96 1/4" [2445]
95 1/2" [2426]
81 11/16" [2075]



CISWR5080




CISWR5480




CISWR6080


109 3/8" [2778]
110 7/8" [2816]
108 1/4" [2750]
107 1/2" [2731]
93 11/16" [2380]



CISWR5090



CISWR5490



CISWR6090

ELEVATION SYMBOL LEGEND:



PANEL IS AVAILABLE AS FIXED ONLY

##

NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.

M.O. = MASONRY OPENING

VALUES IN [] ARE MILLIMETER CONVERSIONS

VALUES IN () ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" [12.7] from M.O. (Masonry Opening) for Unit Size. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Openings & Masonry Openings page.

ELEVATIONS
3-PANEL UNITS


M.O. Brickmould
M.O. Adams/Flat Casing
Rough Opening
Frame Size
Daylight Opening

97 1/16" [2465]
100 1/8" [2543]
94 9/16" [2401]
93 13/16" [2383]
20 5/8" [524] (3)


103 1/16" [2618]
106 1/8" [2696]
100 9/16" [2554]
99 13/16" [2535]
22 5/8" [575] (3)

115 1/16" [2923]
118 1/8" [3000]
112 9/16" [2860]
111 13/16" [2840]
26 5/8" [676] (3)


84 3/8" [2143]
85 7/8" [2181]
83 1/4" [2115]
82 1/2" [2096]
68 11/16" [1745]



CISWT7668




CISWT8068




CISWT9068


88 3/8" [2245]
89 7/8" [2283]
87 1/4" [2216]
86 1/2" [2197]
72 11/16" [1846]



CISWT7670




CISWT8070




CISWT9070


100 3/8" [2550]
101 7/8" [2588]
99 1/4" [2521]
98 1/2" [2502]
84 11/16" [2151]



CISWT7680




CISWT8080




CISWT9080


112 3/8" [2854]
113 7/8" [2892]
111 1/4" [2826]
110 1/2" [2807]
96 11/16" [2456]



CISWT7690



CISWT8090



CISWT9090

ELEVATION SYMBOL LEGEND:

- Ⓡ PANEL IS AVAILABLE AS FIXED ONLY
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.

M.O. = MASONRY OPENING
VALUES IN [] ARE MILLIMETER CONVERSIONS
VALUES IN () ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" [12.7] from M.O. (Masonry Opening) for Unit Size. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Openings & Masonry Openings page.

ELEVATIONS
3-PANEL UNITS


M.O. Brickmould
M.O. Adams/Flat Casing
Rough Opening
Frame Size
Daylight Opening

91 1/16" [2313]
94 1/8" [2391]
88 9/16" [2250]
87 13/16" [2230]
18 5/8" [473] (3)


97 1/16" [2465]
100 1/8" [2543]
94 9/16" [2402]
93 13/16" [2383]
20 5/8" [524] (3)

109 1/16" [2770]
112 1/8" [2848]
106 9/16" [2707]
105 13/16" [2688]
24 5/8" [625] (3)


81 3/8" [2067]
82 7/8" [2105]
80 1/4" [2038]
79 1/2" [2019]
65 11/16" [1668]



CISWR7668




CISWR8068




CISWR9068


97 3/8" [2473]
98 7/8" [2511]
96 1/4" [2445]
95 1/2" [2426]
81 11/16" [2075]



CISWR7680




CISWR8080




CISWR9080


109 3/8" [2778]
110 7/8" [2816]
108 1/4" [2750]
107 1/2" [2731]
93 11/16" [2380]



CISWR7690



CISWR8090



CISWR9090

ELEVATION SYMBOL LEGEND:

- ⓕ PANEL IS AVAILABLE AS FIXED ONLY
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.

M.O. = MASONRY OPENING
VALUES IN [] ARE MILLIMETER CONVERSIONS
VALUES IN () ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" [12.7] from M.O. (Masonry Opening) for Unit Size. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Openings & Masonry Openings page.

**ELEVATIONS
2-PANEL FRENCH DOOR UNITS**

M.O. Brickmould
M.O. Adams/Flat Casing
Rough Opening
Frame Size
Daylight Opening

53 7/8" [1368]
56 15/16" [1446]
51 3/8" [1305]
50 5/8" [1286]
14 5/8" [371] (2)


65 7/8" [1673]
68 15/16" [1751]
63 3/8" [1610]
62 5/8" [1591]
20 5/8" [524] (2)

69 7/8" [1775]
72 15/16" [1853]
67 3/8" [1711]
66 5/8" [1692]
22 5/8" [575] (2)


77 7/8" [1978]
80 15/16" [2056]
75 3/8" [1915]
74 5/8" [1895]
26 5/8" [676] (2)

89 7/8" [2283]
92 15/16" [2361]
87 3/8" [2219]
86 5/8" [2200]
32 5/8" [829] (2)


84 3/8" [2143]
85 7/8" [2181]
83 1/4" [2115]
82 1/2" [2096]
68 11/16" [1745]




CIFRT4068




CIFRT5068



CIFRT5468




CIFRT6068




CIFRT7068


88 3/8" [2245]
89 7/8" [2283]
87 1/4" [2216]
86 1/2" [2197]
72 11/16" [1846]




CIFRT4070




CIFRT5070



CIFRT5470




CIFRT6070




CIFRT7070


100 3/8" [2550]
101 7/8" [2588]
99 1/4" [2521]
98 1/2" [2502]
84 11/16" [2151]




CIFRT4080




CIFRT5080



CIFRT5480



CIFRT6080




CIFRT7080


112 3/8" [2854]
113 7/8" [2892]
111 1/4" [2826]
110 1/2" [2807]
96 11/16" [2456]




CIFRT4090



CIFRT5090



CIFRT5490



CIFRT6090

ELEVATION SYMBOL LEGEND:

- (F)** PANEL IS AVAILABLE AS FIXED ONLY
- ##** NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.

M.O. = MASONRY OPENING
VALUES IN [] ARE MILLIMETER CONVERSIONS
VALUES IN () ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" [12.7] from M.O. (Masonry Opening) for Unit Size. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Openings & Masonry Openings page.

**ELEVATIONS
2-PANEL FRENCH DOOR UNITS**

M.O. Brickmould
M.O. Adams/Flat Casing
Rough Opening
Frame Size
Daylight Opening


49 7/8" [1267]
52 15/16" [1345]
47 3/8" [1203]
46 5/8" [1184]
12 5/8" [321] (2)

61 7/8" [1572]
64 15/16" [1649]
59 3/8" [1508]
58 5/8" [1489]
18 5/8" [473] (2)


65 7/8" [1673]
68 15/16" [1751]
63 3/8" [1610]
62 5/8" [1591]
20 5/8" [524] (2)

73 7/8" [1876]
76 15/16" [1954]
71 3/8" [1813]
70 5/8" [1794]
24 5/8" [625] (2)


81 3/8" [2067]
82 7/8" [2105]
80 1/4" [2038]
79 1/2" [2019]
65 11/16" [1668]




CIFRR4068



CIFRR5068




CIFRR5468




CIFRR6068


97 3/8" [2473]
98 7/8" [2511]
96 1/4" [2445]
95 1/2" [2426]
81 11/16" [2075]




CIFRR4080



CIFRR5080




CIFRR5480




CIFRR6080


109 3/8" [2778]
110 7/8" [2816]
108 1/4" [2750]
107 1/2" [2731]
93 11/16" [2380]




CIFRR4090



CIFRR5090



CIFRR5490



CIFRR6090

ELEVATION SYMBOL LEGEND:

- (F)** PANEL IS AVAILABLE AS FIXED ONLY
- ##** NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.

M.O. = MASONRY OPENING
VALUES IN [] ARE MILLIMETER CONVERSIONS
VALUES IN () ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" [12.7] from M.O. (Masonry Opening) for Unit Size. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Openings & Masonry Openings page.

**ELEVATIONS
4-PANEL FRENCH DOOR UNITS**


M.O. Brickmould
M.O. Adams/Flat Casing
Rough Opening
Frame Size
Daylight Opening

104 1/4" [2648]
107 5/16" [2726]
101 3/4" [2584]
101" [2565]
14 5/8" [371] (4)


128 1/4" [3258]
131 5/16" [3335]
125 3/4" [3194]
125" [3175]
20 5/8" [524] (4)

152 1/4" [3867]
155 5/16" [3945]
149 3/4" [3804]
149" [3785]
26 5/8" [676] (4)


84 3/8" [2143]
85 7/8" [2181]
83 1/4" [2115]
82 1/2" [2096]
68 11/16" [1745]



CIFRT8068




CIFRT10068




CIFRT12068


88 3/8" [2245]
89 7/8" [2283]
87 1/4" [2216]
86 1/2" [2197]
72 11/16" [1846]



CIFRT8070




CIFRT10070




CIFRT12070


100 3/8" [2550]
101 7/8" [2588]
99 1/4" [2521]
98 1/2" [2502]
84 11/16" [2151]



CIFRT8080




CIFRT10080




CIFRT12080


112 3/8" [2854]
113 7/8" [2892]
111 1/4" [2826]
110 1/2" [2807]
96 11/16" [2456]



CIFRT8090



CIFRT10090



CIFRT12090

- ELEVATION SYMBOL LEGEND:**
- (F)** PANEL IS AVAILABLE AS FIXED ONLY
 - ##** NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.
 - M.O. = MASONRY OPENING
 - VALUES IN [] ARE MILLIMETER CONVERSIONS
 - VALUES IN () ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" [12.7] from M.O. (Masonry Opening) for Unit Size. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Openings & Masonry Openings page.

**ELEVATIONS
4-PANEL FRENCH DOOR UNITS**


M.O. Brickmould
M.O. Adams/Flat Casing
Rough Opening
Frame Size
Daylight Opening

96 1/4" [2445]
99 5/16" [2523]
93 3/4" [2381]
93" [2362]
12 5/8" [321] (4)


120 1/4" [3054]
123 5/16" [3132]
117 3/4" [2991]
117" [2972]
18 5/8" [473] (4)

144 1/4" [3664]
147 5/16" [3742]
141 3/4" [3600]
141" [3581]
24 5/8" [625] (4)


81 3/8" [2067]
82 7/8" [2105]
80 1/4" [2038]
79 1/2" [2019]
65 11/16" [1668]



CIFRR8068



CIFRR10068




CIFRR12068


97 3/8" [2473]
98 7/8" [2511]
96 1/4" [2445]
95 1/2" [2426]
81 11/16" [2075]



CIFRR8080




CIFRR10080




CIFRR12080


109 3/8" [2778]
110 7/8" [2816]
108 1/4" [2750]
107 1/2" [2731]
93 11/16" [2380]



CIFRR8090



CIFRR10090



CIFRR12090

- ELEVATION SYMBOL LEGEND:**
- (F)** PANEL IS AVAILABLE AS FIXED ONLY
 - ##** NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.
 - M.O.** = MASONRY OPENING
 - VALUES IN [] ARE MILLIMETER CONVERSIONS
 - VALUES IN () ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" [12.7] from M.O. (Masonry Opening) for Unit Size. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Openings & Masonry Openings page.

**ELEVATIONS
1-PANEL W/ SIDELITE**

M.O. Brickmould
M.O. Adams/Flat Casing
Rough Opening
Frame Size
Daylight Opening

54" [1372]
57 1/16" [1449]
51 1/2" [1308]
50 3/4" [1289]
7 1/2" [190]
26 5/8" [676]

56" [1422]
59 1/16" [1500]
53 1/2" [1359]
52 3/4" [1340]
9 1/2" [241]
26 5/8" [676]


58" [1473]
61 1/16" [1551]
55 1/2" [1410]
54 3/4" [1391]
11 1/2" [292]
26 5/8" [676]

60" [1524]
63 1/16" [1602]
57 1/2" [1460]
56 3/4" [1441]
7 1/2" [190]
32 5/8" [829]


62" [1575]
65 1/16" [1653]
59 1/2" [1511]
58 3/4" [1492]
9 1/2" [241]
32 5/8" [829]

64" [1626]
67 1/16" [1703]
61 1/2" [1562]
60 3/4" [1543]
11 1/2" [292]
32 5/8" [829]


84 3/8" [2143]
85 7/8" [2181]
83 1/4" [2114]
82 1/2" [2096]
88 11/16" [1745]




CISWT3068B10




CISWT3068B12




CISWT3068B14



CISWT3668B10




CISWT3668B12




CISWT3668B14


88 3/8" [2245]
89 7/8" [2283]
87 1/4" [2216]
86 1/2" [2197]
72 11/16" [1846]




CISWT3070B10




CISWT3070B12




CISWT3070B14



CISWT3670B10




CISWT3670B12




CISWT3670B14


100 3/8" [2560]
101 7/8" [2586]
99 1/4" [2521]
98 1/2" [2502]
84 11/16" [2151]




CISWT3080B10




CISWT3080B12




CISWT3080B14



CISWT3680B10




CISWT3680B12




CISWT3680B14


112 3/8" [2854]
113 7/8" [2892]
111 1/4" [2826]
110 1/2" [2807]
96 11/16" [2456]



CISWT3090B10



CISWT3090B12



CISWT3090B14






















ELEVATION SYMBOL LEGEND:
Ⓡ PANEL IS AVAILABLE AS FIXED ONLY

NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.

M.O. = MASONRY OPENING
VALUES IN [] ARE MILLIMETER CONVERSIONS
VALUES IN () ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" [12.7] from M.O. (Masonry Opening) for Unit Size. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Openings & Masonry Openings page.

ELEVATIONS
1-PANEL W/ 2 SIDELITES

M.O. Brickmould M.O. Adams/Flat Casing Rough Opening Frame Size Daylight Opening	67 5/16" [1710] 70 3/8" [1788] 64 13/16" [1646] 64 1/16" [1627] 7 1/2" [190] (2) 26 5/8" [676]	71 5/16" [1811] 74 3/8" [1889] 68 13/16" [1747] 68 1/16" [1729] 9 1/2" [241] (2) 26 5/8" [676]	75 5/16" [1913] 78 3/8" [1991] 72 13/16" [1849] 72 1/16" [1830] 11 1/2" [292] (2) 26 5/8" [676]	73 5/16" [1862] 76 3/8" [1940] 70 13/16" [1798] 70 1/16" [1780] 7 1/2" [190] (2) 32 5/8" [829]	77 5/16" [1964] 80 3/8" [2042] 74 13/16" [1900] 74 1/16" [1881] 9 1/2" [241] (2) 32 5/8" [829]	81 5/16" [2065] 84 3/8" [2143] 78 13/16" [2001] 78 1/16" [1983] 11 1/2" [292] (2) 32 5/8" [829]
84 3/8" [2143] 85 7/8" [2181] 83 1/4" [2114] 82 1/2" [2096] 68 11/16" [1745]						
	CISWT3068F10	CISWT3068F12	CISWT3068F14	CISWT3668F10	CISWT3668F12	CISWT3668F14
88 3/8" [2245] 89 7/8" [2283] 87 1/4" [2216] 86 1/2" [2197] 72 11/16" [1846]						
	CISWT3070F10	CISWT3070F12	CISWT3070F14	CISWT3670F10	CISWT3670F12	CISWT3670F14
100 3/8" [2550] 101 7/8" [2588] 99 1/4" [2521] 98 1/2" [2502] 84 11/16" [2151]						
	CISWT3080F10	CISWT3080F12	CISWT3080F14	CISWT3680F10	CISWT3680F12	CISWT3680F14
112 3/8" [2854] 113 7/8" [2892] 111 1/4" [2825] 110 1/2" [2807] 96 11/16" [2456]						
	CISWT3090F10	CISWT3090F12	CISWT3090F14			

ELEVATION SYMBOL LEGEND:

- (F) PANEL IS AVAILABLE AS FIXED ONLY
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.
- M.O. = MASONRY OPENING
- VALUES IN [] ARE MILLIMETER CONVERSIONS
- VALUES IN () ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" [12.7] from M.O. (Masonry Opening) for Unit Size. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Openings & Masonry Openings page.

ELEVATIONS
5'-0" WIDE FRENCH DOOR W/2 SIDELITES


M.O. Brickmould
M.O. Adams/Flat Casing
Rough Opening
Frame Size
Daylight Opening

92 1/2" [2350]
95 9/16" [2427]
90" [2286]
89 1/4" [2267]
7 1/2" [190] (2)
20 5/8" [524] (2)

96 1/2" [2451]
99 9/16" [2529]
94" [2387]
93 1/4" [2369]
9 1/2" [241] (2)
20 5/8" [524] (2)

100 1/2" [2553]
103 9/16" [2630]
98" [2489]
97 1/4" [2470]
11 1/2" [292] (2)
20 5/8" [524] (2)


84 3/8" [2143]
85 7/8" [2161]
85 1/4" [2114]
82 1/2" [2096]
88 11/16" [1745]



CIFRT5068Q10




CIFRT5068Q12




CIFRT5068Q14


88 3/8" [2245]
89 7/8" [2263]
87 1/4" [2216]
86 1/2" [2197]
72 11/16" [1846]



CIFRT5070Q10




CIFRT5070Q12




CIFRT5070Q14


100 3/8" [2550]
101 7/8" [2568]
99 1/4" [2521]
98 1/2" [2502]
84 11/16" [2151]



CIFRT5080Q10




CIFRT5080Q12




CIFRT5080Q14


112 3/8" [2854]
113 7/8" [2892]
111 1/4" [2825]
110 1/2" [2807]
96 11/16" [2456]



CIFRT5090Q10



CIFRT5090Q12



CIFRT5090Q14

ELEVATION SYMBOL LEGEND:
Ⓡ PANEL IS AVAILABLE AS FIXED ONLY

NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.

M.O. = MASONRY OPENING
VALUES IN [] ARE MILLIMETER CONVERSIONS
VALUES IN () ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" [12.7] from M.O. (Masonry Opening) for Unit Size. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Openings & Masonry Openings page.

ELEVATIONS

5'-4" WIDE FRENCH DOORS W/ 2 SIDELITES


M.O. Brickmould
M.O. Adams/Flat Casing
Rough Opening
Frame Size
Daylight Opening

96 1/2" [2451]
99 9/16" [2529]
94" [2387]
93 1/4" [2369]
7 1/2" [190] (2)
22 5/8" [575] (2)


100 1/2" [2553]
103 9/16" [2630]
98" [2489]
97 1/4" [2470]
9 1/2" [241] (2)
22 5/8" [575] (2)

104 1/2" [2654]
107 9/16" [2732]
102" [2600]
101 1/4" [2572]
11 1/2" [292] (2)
22 5/8" [575] (2)


84 3/8" [2143]
85 7/8" [2181]
83 1/4" [2114]
82 1/2" [2096]
68 11/16" [1745]



CIFRT5468Q10




CIFRT5468Q12




CIFRT5468Q14


88 3/8" [2245]
89 7/8" [2283]
87 1/4" [2216]
86 1/2" [2197]
72 11/16" [1846]



CIFRT5470Q10




CIFRT5470Q12




CIFRT5470Q14


100 3/8" [2550]
101 7/8" [2588]
99 1/4" [2521]
98 1/2" [2502]
84 11/16" [2151]



CIFRT5480Q10




CIFRT5480Q12




CIFRT5480Q14


112 3/8" [2854]
113 7/8" [2892]
111 1/4" [2825]
110 1/2" [2807]
96 11/16" [2456]



CIFRT5490Q10



CIFRT5490Q12



CIFRT5490Q14

ELEVATION SYMBOL LEGEND:

(F) PANEL IS AVAILABLE AS FIXED ONLY

NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.

M.O. = MASONRY OPENING
VALUES IN [] ARE MILLIMETER CONVERSIONS
VALUES IN () ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" [12.7] from M.O. (Masonry Opening) for Unit Size. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Openings & Masonry Openings page.

ELEVATIONS
6'-0" WIDE FRENCH DOORS W/ 2 SIDELITES


M.O. Brickmould
M.O. Adams/Flat Casing
Rough Opening
Frame Size
Daylight Opening

104 1/2" [2654]
107 9/16" [2732]
102" [2590]
101 1/4" [2572]
26 5/8" [676] (2) - 7 1/2" [190] (2)


108 1/2" [2756]
111 9/16" [2834]
106" [2692]
105 1/4" [2673]
26 5/8" [676] (2) - 9 1/2" [241] (2)

112 1/2" [2858]
115 9/16" [2935]
110" [2794]
109 1/4" [2775]
26 5/8" [676] (2) - 11 1/2" [292] (2)


84 3/8" [2143]
85 7/8" [2181]
83 1/4" [2114]
82 1/2" [2096]
69 3/4" [1772]
69 3/4" [1745]



CIFRT6068Q10




CIFRT6068Q12




CIFRT6068Q14


88 3/8" [2245]
89 7/8" [2283]
87 1/4" [2216]
86 1/2" [2197]
73 3/4" [1873]
72 11/16" [1846]



CIFRT6070Q10




CIFRT6070Q12




CIFRT6070Q14


100 3/8" [2550]
101 7/8" [2588]
99 1/4" [2521]
98 1/2" [2502]
85 3/4" [2178]
84 11/16" [2151]



CIFRT6080Q10




CIFRT6080Q12




CIFRT6080Q14


112 3/8" [2854]
113 7/8" [2892]
111 1/4" [2825]
110 1/2" [2807]
97 3/4" [2483]
96 11/16" [2456]



CIFRT6090Q10



CIFRT6090Q12



CIFRT6090Q14

ELEVATION SYMBOL LEGEND:
ⓕ PANEL IS AVAILABLE AS FIXED ONLY

NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.

M.O. = MASONRY OPENING
VALUES IN [] ARE MILLIMETER CONVERSIONS
VALUES IN () ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" [12.7] from M.O. (Masonry Opening) for Unit Size. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Openings & Masonry Openings page.

ELEVATIONS
7'-0" WIDE FRENCH DOORS W/ 2 SIDELITES


M.O. Brickmould
M.O. Adams/Flat Casing
Rough Opening
Frame Size
Daylight Opening

116 1/2" [2959]
119 9/16" [3037]
114" [2885]
113 1/4" [2877]
32 5/8" [829] (2) - 7 1/2" [190] (2)


120 1/2" [3061]
123 9/16" [3138]
118" [2997]
117 1/4" [2978]
32 5/8" [829] (2) - 9 1/2" [241] (2)

124 1/2" [3162]
127 9/16" [3240]
122" [3098]
121 1/4" [3080]
32 5/8" [829] (2) - 11 1/2" [292] (2)


84 3/8" [2143]
85 7/8" [2181]
83 1/4" [2114]
82 1/2" [2096]
68 11/16" [1745]



CIFRT7068Q10




CIFRT7068Q12




CIFRT7068Q14


88 3/8" [2245]
89 7/8" [2283]
87 1/4" [2216]
86 1/2" [2197]
72 11/16" [1846]



CIFRT7070Q10




CIFRT7070Q12




CIFRT7070Q14


100 3/8" [2550]
101 7/8" [2588]
99 1/4" [2521]
98 1/2" [2502]
84 11/16" [2151]



CIFRT7080Q10



CIFRT7080Q12



CIFRT7080Q14

- ELEVATION SYMBOL LEGEND:**
- (F)** PANEL IS AVAILABLE AS FIXED ONLY
 - ##** NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.
 - M.O.** = MASONRY OPENING
 - VALUES IN [] ARE MILLIMETER CONVERSIONS
 - VALUES IN () ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" [12.7] from M.O. (Masonry Opening) for Unit Size. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Openings & Masonry Openings page.

ELEVATIONS
1- SASH TRANSOMS

M.O. Brickmould M.O. Adams/Flat Casing Rough Opening Frame Size Daylight Opening	26 11/16" [678] 29 3/4" [756] 24 3/16" [614] 23 7/16" [595] 12 5/8" [321]	32 11/16" [830] 35 3/4" [908] 30 3/16" [767] 29 7/16" [748] 18 5/8" [473]	38 11/16" [983] 41 3/4" [1060] 36 3/16" [919] 35 7/16" [900] 24 5/8" [625]	49 7/8" [1267] 52 15/16" [1345] 47 3/8" [1203] 46 5/8" [1184] 35 13/16" [910]	61 7/8" [1572] 64 15/16" [1649] 59 3/8" [1508] 58 5/8" [1489] 47 13/16" [1214]	73 7/8" [1876] 76 15/16" [1954] 71 3/8" [1815] 70 5/8" [1794] 59 13/16" [1519]										
	20 1/2" [521] 22" [559] 18 3/4" [476] 18" [457] 10 15/16" [278]															
	32 1/2" [826] 34" [864] 30 3/4" [781] 30" [762] 22 15/16" [583]															
M.O. Brickmould M.O. Adams/Flat Casing Rough Opening Frame Size Daylight Opening	16 13/16" [427] 19 7/8" [505] 14 5/16" [364] 13 9/16" [344] 7 1/2" [190]	18 13/16" [478] 21 7/8" [556] 16 5/16" [414] 15 9/16" [395] 9 1/2" [241]	20 13/16" [529] 23 7/8" [606] 18 5/16" [465] 17 9/16" [446] 11 1/2" [292]	28 11/16" [729] 31 3/4" [806] 26 3/16" [665] 25 7/16" [646] 14 5/8" [371]	34 11/16" [881] 37 3/4" [959] 32 3/16" [818] 31 7/16" [799] 20 5/8" [524]	36 11/16" [932] 39 3/4" [1010] 34 3/16" [868] 33 7/16" [849] 22 5/8" [575]	40 11/16" [1033] 43 3/4" [1111] 38 3/16" [970] 37 7/16" [951] 26 5/8" [676]	46 11/16" [1186] 49 3/4" [1264] 44 3/16" [1122] 43 7/16" [1103] 32 5/8" [829]								
	20 1/2" [521] 22" [559] 18 3/4" [476] 18" [457] 10 15/16" [278]															
	32 1/2" [826] 34" [864] 30 3/4" [781] 30" [762] 22 15/16" [583]															
M.O. Brickmould M.O. Adams/Flat Casing Rough Opening Frame Size Daylight Opening	53 7/8" [1368] 56 15/16" [1446] 51 3/8" [1305] 62 5/8" [1591] 39 13/16" [1011]	65 7/8" [1673] 68 15/16" [1751] 63 3/8" [1610] 62 5/8" [1591] 51 13/16" [1316]	69 7/8" [1775] 72 15/16" [1853] 67 3/8" [1711] 66 5/8" [1692] 55 13/16" [1418]	77 7/8" [1978] 80 15/16" [2056] 75 3/8" [1915] 74 5/8" [1895] 63 13/16" [1621]	89 7/8" [2283] 92 15/16" [2361] 87 3/8" [2219] 86 5/8" [2200] 75 13/16" [1926]											
	20 1/2" [521] 22" [559] 18 3/4" [476] 18" [457] 10 15/16" [278]															
	32 1/2" [826] 34" [864] 30 3/4" [781] 30" [762] 22 15/16" [583]															

ELEVATION SYMBOL LEGEND:
 PANEL IS AVAILABLE AS FIXED ONLY

NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.

M.O. = MASONRY OPENING
 VALUES IN [] ARE MILLIMETER CONVERSIONS
 VALUES IN () ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" [12.7] from M.O. (Masonry Opening) for Unit Size. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Openings & Masonry Openings page.

ELEVATIONS
2-SASH TRANSOM

M.O. Brickmould	49 7/8" [1267]	61 7/8" [1572]	73 7/8" [1876]	53 7/8" [1368]	65 7/8" [1673]
M.O. Adams/Flat Casing	52 15/16" [1345]	64 15/16" [1649]	76 15/16" [1954]	56 15/16" [1446]	68 15/16" [1751]
Rough Opening	47 3/8" [1203]	59 3/8" [1508]	71 3/8" [1813]	51 3/8" [1305]	63 3/8" [1610]
Frame Size	46 5/8" [1184]	58 5/8" [1489]	70 5/8" [1794]	50 5/8" [1286]	62 5/8" [1591]
Daylight Opening	12 5/8" [321] (2)	18 5/8" [473] (2)	24 5/8" [625] (2)	14 5/8" [371] (2)	20 5/8" [524] (2)

20 1/2" [521]
22" [559]
18 3/4" [476]
18" [457]
10 15/16" [278]



CTISWR4016



CTISWR5016



CTISWR6016



CTISWT4016




CTISWT5016


32 1/2" [826]
34" [864]
30 3/4" [781]
30" [762]
22 15/16" [583]




CTISWR4026




CTISWR5026



CTISWR6026



CTISWT4026



CTISWT5026

M.O. Brickmould	69 7/8" [1775]	77 7/8" [1978]	89 7/8" [2263]
M.O. Adams/Flat Casing	72 15/16" [1853]	80 15/16" [2056]	92 15/16" [2361]
Rough Opening	67 3/8" [1711]	75 3/8" [1915]	87 3/8" [2219]
Frame Size	66 5/8" [1692]	74 5/8" [1895]	86 5/8" [2200]
Daylight Opening	22 5/8" [575] (2)	26 5/8" [676] (2)	32 5/8" [829] (2)

20 1/2" [521]
22" [559]
18 3/4" [476]
18" [457]
10 15/16" [278]



CTISWT5416



CTISWT6016



CTISWT7016

32 1/2" [826]
34" [864]
30 3/4" [781]
30" [762]
22 15/16" [583]



CTISWT5426



CTISWT6026



CTISWT7026

M.O. Brickmould	54" [1372]	56" [1422]	58" [1473]	60" [1524]	62" [1575]	64" [1626]
M.O. Adams/Flat Casing	57 1/16" [1449]	59 1/16" [1500]	61 1/16" [1551]	63 1/16" [1602]	65 1/16" [1653]	67 1/16" [1703]
Rough Opening	51 1/2" [1308]	53 1/2" [1359]	55 1/2" [1410]	57 1/2" [1461]	59 1/2" [1511]	61 1/2" [1562]
Frame Size	50 3/4" [1289]	52 3/4" [1340]	54 3/4" [1391]	56 3/4" [1441]	58 3/4" [1492]	60 3/4" [1543]
Daylight Opening	7 1/2" [190]	9 1/2" [241]	11 1/2" [292]	13 1/2" [343]	15 1/2" [394]	17 1/2" [445]
	26 5/8" [676]	26 5/8" [703]	26 5/8" [676]	32 5/8" [829]	32 5/8" [829]	32 5/8" [829]

20 1/2" [521]
22" [559]
18 3/4" [476]
18" [457]
10 15/16" [278]




CTISWT3016B10



CTISWT3016B12



CTISWT3016B14



CTISWT3616B10



CTISWT3616B12




CTISWT3616B14

32 1/2" [826]
34" [864]
30 3/4" [781]
30" [762]
22 15/16" [583]



CTISWT3026B10




CTISWT3026B12




CTISWT3026B14



CTISWT3626B10



CTISWT3626B12



CTISWT3626B14

ELEVATION SYMBOL LEGEND:

(F) PANEL IS AVAILABLE AS FIXED ONLY

NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.

M.O. = MASONRY OPENING
VALUES IN [] ARE MILLIMETER CONVERSIONS
VALUES IN () ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" [12.7] from M.O. (Masonry Opening) for Unit Size. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Openings & Masonry Openings page.

ELEVATIONS
3-SASH TRANSOM

M.O. Brickmould
M.O. Adams/Flat Casing
Rough Opening
Frame Size
Daylight Opening

91 1/16" [2313]
94 1/8" [2391]
88 9/16" [2249]
87 13/16" [2230]
18 5/8" [473] (3)

109 1/16" [2770]
112 1/8" [2848]
106 9/16" [2707]
105 13/16" [2688]
24 5/8" [625] (3)

97 1/16" [2465]
100 1/8" [2543]
94 9/16" [2402]
93 13/16" [2383]
20 5/8" [524] (3)

103 1/16" [2618]
106 1/8" [2696]
100 9/16" [2554]
99 13/16" [2535]
22 5/8" [575] (3)

115 1/16" [2923]
118 1/8" [3000]
112 9/16" [2859]
111 13/16" [2840]
26 5/8" [676] (3)

20 1/2" [521]
22" [559]
34" [864]
18 3/4" [476]



CTISWR7616



CTISWR9016



CTISWT7616



CTISWT8016



CTISWT9016


32 1/2" [826]
34" [864]
30 3/4" [781]
30" [762]
22 15/16" [583]




CTISWR7626



CTISWR9026



CTISWT7626



CTISWT8026



CTISWT9026

M.O. Brickmould
M.O. Adams/Flat Casing
Rough Opening
Frame Size
Daylight Opening

67 5/16" [1710]
70 3/8" [1788]
64 13/16" [1646]
64 1/16" [1627]
7 1/2" [190] (2)
26 5/8" [676]

71 1/16" [1811]
74 3/8" [1889]
68 13/16" [1748]
68 1/16" [1729]
9 1/2" [241] (2)
26 5/8" [676]

75 1/16" [1913]
78 3/8" [1991]
72 13/16" [1849]
72 1/16" [1830]
11 1/2" [292] (2)
32 5/8" [829]

73 5/16" [1862]
76 3/8" [1940]
70 13/16" [1799]
70 1/16" [1780]
7 1/2" [190] (2)
32 5/8" [829]

77 5/16" [1964]
80 3/8" [2042]
74 13/16" [1900]
74 1/16" [1881]
9 1/2" [241] (2)
32 5/8" [829]

81 5/16" [2065]
84 3/8" [2143]
78 13/16" [2002]
78 1/16" [1983]
11 1/2" [292] (2)
32 5/8" [829]

20 1/2" [521]
22" [559]
34" [864]
18 3/4" [476]



CTISWT3016F10



CTISWT3016F12



CTISWT3016F12



CTISWT3616F10




CTISWT3616F10




CTISWT3616F10


32 1/2" [826]
34" [864]
30 3/4" [781]
30" [762]
22 15/16" [583]




CTISWT3026F10




CTISWT3026F12




CTISWT3026F12



CTISWT3626F10



CTISWT3626F10



CTISWT3626F10

ELEVATION SYMBOL LEGEND:



PANEL IS AVAILABLE AS FIXED ONLY



NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.

M.O. = MASONRY OPENING

VALUES IN [] ARE MILLIMETER CONVERSIONS


VALUES IN () ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" [12.7] from M.O. (Masonry Opening) for Unit Size. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Openings & Masonry Openings page.


ELEVATIONS
4-SASH TRANSOMS

M.O. Brickmould	96 1/4" [2445]	120 1/4" [3054]	144 1/4" [3664]
M.O. Adams/Flat Casing	99 5/16" [2523]	123 5/16" [3132]	147 5/16" [3742]
Rough Opening	93 3/4" [2381]	117 3/4" [2991]	141 3/4" [3600]
Frame Size	93" [2362]	117" [2972]	141" [3581]
Daylight Opening	12 5/8" [321] (4)	18 5/8" [473] (4)	24 5/8" [625] (4)

20 1/2" [521]
22" [559]
18 3/4" [476]
18" [457]
10 15/16" [278]




32 1/2" [826]
34" [864]
30 3/4" [781]
30" [762]
22 15/16" [583]




M.O. Brickmould	104 1/4" [2648]	128 1/4" [3258]	152 1/4" [3867]
M.O. Adams/Flat Casing	107 5/16" [2726]	131 5/16" [3335]	155 5/16" [3945]
Rough Opening	101 3/4" [2584]	125 3/4" [3194]	149 3/4" [3804]
Frame Size	101" [2565]	125" [3175]	149" [3785]
Daylight Opening	14 5/8" [371] (4)	20 5/8" [524] (4)	26 5/8" [676] (4)

20 1/2" [521]
22" [559]
18 3/4" [476]
18" [457]
10 15/16" [278]



32 1/2" [826]
34" [864]
30 3/4" [781]
30" [762]
22 15/16" [583]



ELEVATION SYMBOL LEGEND:

- F** PANEL IS AVAILABLE AS FIXED ONLY
- ##** NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.
- M.O. = MASONRY OPENING
- VALUES IN [] ARE MILLIMETER CONVERSIONS
- VALUES IN () ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" [12.7] from M.O. (Masonry Opening) for Unit Size. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Openings & Masonry Openings page.

ELEVATIONS
FRENCH TRANSM W/ 2 SIDELITES

M.O. Brickmould 92 1/2" [2350]
M.O. Adams/Flat Casing 95 9/16" [2427]
Rough Opening 90" [2286]
Frame Size 89 1/4" [2267]
Daylight Opening 7 1/2" [190] (2)
20 5/8" [524] (2)

20 1/2" [521]
22" [559]
18 3/4" [476]
18" [457]
10 15/16" [278]



CTIFRT5016Q10

96 1/2" [2451]
99 9/16" [2529]
94" [2388]
93 1/4" [2369]
9 1/2" [241] (2)
20 5/8" [524] (2)



CTIFRT5016Q12

100 1/2" [2553]
103 9/16" [2630]
98" [2489]
97 1/4" [2470]
11 1/2" [292] (2)
20 5/8" [524] (2)



CTIFRT5016Q14

32 1/2" [826]
34" [864]
30 3/4" [781]
30" [762]
22 15/16" [583]



CTIFRT5026Q10



CTIFRT5026Q12



CTIFRT5026Q14

M.O. Brickmould 96 1/2" [2451]
M.O. Adams/Flat Casing 99 9/16" [2529]
Rough Opening 94" [2388]
Frame Size 93 1/4" [2369]
Daylight Opening 7 1/2" [190] (2)
22 5/8" [575] (2)

20 1/2" [521]
22" [559]
18 3/4" [476]
18" [457]
10 15/16" [278]



CTIFRT5416Q10




CTIFRT5416Q12




CTIFRT5416Q14


32 1/2" [826]
34" [864]
30 3/4" [781]
30" [762]
22 15/16" [583]



CTIFRT5426Q10



CTIFRT5426Q12



CTIFRT5426Q14

M.O. Brickmould 104 1/2" [2654]
M.O. Adams/Flat Casing 107 9/16" [2732]
Rough Opening 102" [2591]
Frame Size 101 1/4" [2572]
Daylight Opening 7 1/2" [190] (2)
26 5/8" [676] (2)

20 1/2" [521]
22" [559]
18 3/4" [476]
18" [457]
10 15/16" [278]



CTIFRT6016Q10




CTIFRT6016Q12




CTIFRT6016Q14

32 1/2" [826]
34" [864]
30 3/4" [781]
30" [762]
22 15/16" [583]



CTIFRT6026Q10



CTIFRT6026Q12



CTIFRT6026Q14

M.O. Brickmould 116 1/2" [2959]
M.O. Adams/Flat Casing 119 9/16" [3037]
Rough Opening 114" [2896]
Frame Size 113 1/4" [2877]
Daylight Opening 7 1/2" [190] (2)
32 5/8" [829] (2)

20 1/2" [521]
22" [559]
18 3/4" [476]
18" [457]
10 15/16" [278]



CTIFRT7016Q10



CTIFRT7016Q12



CTIFRT7016Q14

32 1/2" [826]
34" [864]
30 3/4" [781]
30" [762]
22 15/16" [583]



CTIFRT7026Q10



CTIFRT7026Q12



CTIFRT7026Q14

ELEVATION SYMBOL LEGEND:



PANEL IS AVAILABLE AS FIXED ONLY



NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.

M.O. = MASONRY OPENING
VALUES IN [] ARE MILLIMETER CONVERSIONS
VALUES IN () ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" [12.7] from M.O. (Masonry Opening) for Unit Size. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Openings & Masonry Openings page.

ELEVATIONS
1-PANEL SECTOR TOP UNITS

M.O. Brickmould	28 11/16" [729]	34 11/16" [881]	36 11/16" [932]	40 11/16" [1033]	46 11/16" [1186]
M.O. Adams/Flat Casing	31 3/4" [806]	37 3/4" [959]	39 3/4" [1010]	43 3/4" [1111]	49 3/4" [1264]
Rough Opening	26 3/16" [665]	32 3/16" [817]	34 3/16" [868]	38 3/16" [970]	44 3/16" [1122]
Frame Size	25 7/16" [646]	31 7/16" [799]	33 7/16" [849]	37 7/16" [951]	43 7/16" [1103]
Daylight Opening	14 5/8" [371]	20 5/8" [524]	22 5/8" [575]	26 5/8" [676]	32 5/8" [829]

84-3/8" [2143] 85-7/8" [2181] 88-1/4" [2115] 82-1/2" [2096] 68-11/16" [1745]					
	CISWTS2068	CISWTS2668	CISWTS2868	CISWTS3068	CISWTS3668
88-3/8" [2245] 89-7/8" [2283] 87-1/4" [2216] 86-1/2" [2197] 72-11/16" [1846]					
	CISWTS2070	CISWTS2670	CISWTS2870	CISWTS3070	CISWTS3670
100-3/8" [2550] 101-7/8" [2588] 99-1/4" [2521] 98-1/2" [2502] 84-11/16" [2151]					
	CISWTS2080	CISWTS2680	CISWTS2880	CISWTS3080	CISWTS3680
112-3/8" [2854] 113-7/8" [2892] 111-1/4" [2825] 110-1/2" [2807] 96-11/16" [2456]					
	CISWTS2090	CISWTS2690	CISWTS2890	CISWTS3090	

ELEVATION SYMBOL LEGEND:

F PANEL IS AVAILABLE AS FIXED ONLY

NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.

M.O. = MASONRY OPENING
VALUES IN [] ARE MILLIMETER CONVERSIONS
VALUES IN () ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" [12.7] from M.O. (Masonry Opening) for Unit Size. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Openings & Masonry Openings page.


ELEVATIONS
3-PANEL SECTOR TOP UNITS

M.O. Brickmould 97 1/16" [2465]
M.O. Adams/Flat Casing 100 1/8" [2543]
Rough Opening 94 9/16" [2402]
Frame Size 93 13/16" [2383]
Daylight Opening 20 5/8" [524] (3)


103 1/16" [2618]
106 1/8" [2696]
100 9/16" [2554]
99 13/16" [2535]
22 5/8" [575] (3)

115 1/16" [2923]
118 1/8" [3000]
112 9/16" [2859]
111 13/16" [2840]
26 5/8" [676] (3)


84 3/8" [2143]
85 7/8" [2181]
83 1/4" [2114]
82 1/2" [2096]
68 11/16" [1745]



CISWTS7668




CISWTS8068




CISWTS9068


88 3/8" [2245]
89 7/8" [2283]
87 1/4" [2216]
86 1/2" [2197]
72 11/16" [1846]



CISWTS7670




CISWTS8070




CISWTS9070


100 3/8" [2560]
101 7/8" [2598]
99 1/4" [2521]
98 1/2" [2502]
84 11/16" [2151]



CISWTS7680




CISWTS8080




CISWTS9080


112 3/8" [2854]
113 7/8" [2892]
111 1/4" [2825]
110 1/2" [2807]
96 11/16" [2456]



CISWTS7690



CISWTS8090



CISWTS9090

ELEVATION SYMBOL LEGEND:

(F) PANEL IS AVAILABLE AS FIXED ONLY

NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.

M.O. = MASONRY OPENING

VALUES IN [] ARE MILLIMETER CONVERSIONS

VALUES IN () ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" [12.7] from M.O. (Masonry Opening) for Unit Size. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Openings & Masonry Openings page.

**ELEVATIONS
FRENCH DOOR SECTOR TOP UNITS**

M.O. Brickmould
M.O. Adams/Flat Casing
Rough Opening
Frame Size
Daylight Opening

53 7/8" [1368]
56 15/16" [1446]
51 3/8" [1305]
50 5/8" [1286]
14 5/8" [371] (2)


65 7/8" [1673]
68 15/16" [1751]
63 3/8" [1610]
62 5/8" [1591]
20 5/8" [524] (2)

69 7/8" [1775]
72 15/16" [1853]
67 3/8" [1711]
66 5/8" [1692]
22 5/8" [575] (2)


77 7/8" [1978]
80 15/16" [2056]
75 3/8" [1914]
74 5/8" [1895]
26 5/8" [676] (2)

89 7/8" [2283]
92 15/16" [2361]
87 3/8" [2219]
86 5/8" [2200]
32 5/8" [829] (2)


84 3/8" [2143]
85 7/8" [2181]
83 1/4" [2114]
82 1/2" [2096]
86 11/16" [1745]




CIFRTS4068



CIFRTS5068



CIFRTS5468




CIFRTS6068




CIFRTS7068


88 3/8" [2245]
89 7/8" [2283]
87 1/4" [2216]
86 1/2" [2197]
72 11/16" [1846]




CIFRTS4070




CIFRTS5070



CIFRTS5470




CIFRTS6070




CIFRTS7070


100 3/8" [2560]
101 7/8" [2598]
99 1/4" [2521]
98 1/2" [2502]
84 11/16" [2151]




CIFRTS4080




CIFRTS5080



CIFRTS5480



CIFRTS6080



CIFRTS7080

- ELEVATION SYMBOL LEGEND:**
- (F) PANEL IS AVAILABLE AS FIXED ONLY
 - ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.
 - M.O. = MASONRY OPENING
 - VALUES IN [] ARE MILLIMETER CONVERSIONS
 - VALUES IN () ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" [12.7] from M.O. (Masonry Opening) for Unit Size. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Openings & Masonry Openings page.

**ELEVATIONS
FRENCH DOOR SECTOR TOP UNITS**


M.O. Brickmould 53 7/8" [1368]
M.O. Adams/Flat Casing 56 15/16" [1446]
Rough Opening 51 3/8" [1305]
Frame Size 50 5/8" [1286]
Daylight Opening 14 5/8" [371] (2)

65 7/8" [1673]
68 15/16" [1751]
63 3/8" [1610]
62 5/8" [1591]
20 5/8" [524] (2)


69 7/8" [1775]
72 15/16" [1853]
67 3/8" [1711]
66 5/8" [1692]
22 5/8" [575] (2)

77 7/8" [1978]
80 15/16" [2056]
75 3/8" [1914]
74 5/8" [1895]
26 5/8" [676] (2)

100 3/8" [2550]
101 7/8" [2588]
99 1/4" [2521]
98 1/2" [2502]
84 11/16" [2151]




CIFRTH5080




CIFRTH6080


112 3/8" [2854]
113 7/8" [2892]
111 1/4" [2825]
110 1/2" [2807]
96 11/16" [2456]




CIFRTS4090



CIFRTS5090




CIFRTS5490




CIFRTS6090

112 3/8" [2854]
113 7/8" [2892]
111 1/4" [2825]
110 1/2" [2807]
96 11/16" [2456]



CIFRTH5090



CIFRTH6090

ELEVATION SYMBOL LEGEND:



PANEL IS AVAILABLE AS FIXED ONLY

NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.

M.O. = MASONRY OPENING
VALUES IN [] ARE MILLIMETER CONVERSIONS
VALUES IN () ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" [12.7] from M.O. (Masonry Opening) for Unit Size. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Openings & Masonry Openings page.


ELEVATIONS
4-PANEL FRENCH DOOR SECTOR TOP UNITS

M.O. Brickmould
M.O. Adams/Flat Casing
Rough Opening
Frame Size
Daylight Opening


96 1/4" [2445]
99 5/16" [2523]
101 3/4" [2584]
101" [2564]
12 5/8" [321] (4)

120 1/4" [3054]
123 5/16" [3132]
125 3/4" [3194]
125" [3175]
18 5/8" [473] (4)

84 3/8" [2143]
85 7/8" [2181]
83 1/4" [2115]
82 1/2" [2096]
68 11/16" [1746]




CIFRTS8068




CIFRTS10068

88 3/8" [2245]
89 7/8" [2283]
87 1/4" [2216]
86 1/2" [2197]
72 11/16" [1846]




CIFRTS8070




CIFRTS10070

100 3/8" [2550]
101 7/8" [2588]
99 1/4" [2521]
98 1/2" [2502]
84 11/16" [2151]




CIFRTS8080




CIFRTS10080

112 3/8" [2854]
113 7/8" [2892]
111 1/4" [2826]
110 1/2" [2807]
96 11/16" [2456]



CIFRTS8090



CIFRTS10090

ELEVATION SYMBOL LEGEND:

(F) PANEL IS AVAILABLE AS FIXED ONLY

NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.

M.O. = MASONRY OPENING
VALUES IN [] ARE MILLIMETER CONVERSIONS
VALUES IN () ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" [12.7] from M.O. (Masonry Opening) for Unit Size. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Openings & Masonry Openings page.

ELEVATIONS
5'-0" WIDE FRENCH SECTOR TOP DOOR
W/ 2 SIDELITES


M.O. Brickmould
M.O. Adams/Flat Casing
Rough Opening
Frame Size
Daylight Opening

92 1/2" [2350]
95 9/16" [2427]
90" [2286]
89 1/4" [2267]
7 1/2" [190] (2)
20 5/8" [524] (2)


96 1/2" [2451]
99 9/16" [2529]
94" [2387]
93 1/4" [2369]
9 1/2" [241] (2)
20 5/8" [524] (2)

100 1/2" [2553]
103 9/16" [2630]
98" [2489]
97 1/4" [2470]
11 1/2" [292] (2)
20 5/8" [524] (2)


84 3/8" [2143]
85 7/8" [2181]
83 1/4" [2114]
82 1/2" [2096]
68 11/16" [1745]



CIFRTS5068Q10




CIFRTS5068Q12




CIFRTS5068Q14


88 3/8" [2245]
89 7/8" [2283]
87 1/4" [2221.6]
86 1/2" [2197]
72 11/16" [1846]



CIFRTS5070Q10




CIFRTS5070Q12




CIFRTS5070Q14


100 3/8" [2550]
101 7/8" [2588]
99 1/4" [2521.1]
98 1/2" [2502]
84 11/16" [2151]



CIFRTS5080Q10




CIFRTS5080Q12




CIFRTS5080Q14


112 3/8" [2854]
113 7/8" [2892]
111 1/4" [2825]
110 1/2" [2807]
96 11/16" [2456]



CIFRTS5090Q10



CIFRTS5090Q12



CIFRTS5090Q14

ELEVATION SYMBOL LEGEND:

- F** PANEL IS AVAILABLE AS FIXED ONLY
- #** NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.
- M.O. = MASONRY OPENING
- VALUES IN [] ARE MILLIMETER CONVERSIONS
- VALUES IN () ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" [12.7] from M.O. (Masonry Opening) for Unit Size. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Openings & Masonry Openings page.

ELEVATIONS
5'4" WIDE FRENCH SECTOR TOP DOOR
W/ 2 SIDELITES


M.O. Brickmould
M.O. Adams/Flat Casing
Rough Opening
Frame Size
Daylight Opening

96 1/2" [2451]
99 9/16" [2529]
94" [2387]
93 1/4" [2369]
7 1/2" [190] (2)
22 5/8" [575] (2)


100 1/2" [2553]
103 9/16" [2630]
98" [2493]
97 1/4" [2470]
9 1/2" [241] (2)
22 5/8" [575] (2)

104 1/2" [2654]
107 9/16" [2732]
102" [2590]
101 1/4" [2572]
11 1/2" [292] (2)
22 5/8" [575] (2)


84 3/8" [2143]
85 7/8" [2181]
83 1/4" [2114]
82 1/2" [2096]
68 11/16" [1745]



CIFRTS5468Q10




CIFRTS5468Q12




CIFRTS5468Q14


88 3/8" [2245]
89 7/8" [2283]
87 1/4" [2216]
86 1/2" [2197]
72 11/16" [1846]



CIFRTS5470Q10




CIFRTS5470Q12



CIFRTS5470Q14


100 3/8" [2550]
101 7/8" [2586]
99 1/4" [2521]
98 1/2" [2502]
84 11/16" [2151]



CIFRTS5480Q10




CIFRTS5480Q12




CIFRTS5480Q14


112 3/8" [2854]
113 7/8" [2892]
111 1/4" [2825]
110 1/2" [2807]
96 11/16" [2456]



CIFRTS5490Q10



CIFRTS5490Q12



CIFRTS5490Q14

ELEVATION SYMBOL LEGEND:
Ⓡ PANEL IS AVAILABLE AS FIXED ONLY

NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.

M.O. = MASONRY OPENING
VALUES IN [] ARE MILLIMETER CONVERSIONS
VALUES IN () ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" [12.7] from M.O. (Masonry Opening) for Unit Size. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Openings & Masonry Openings page.

**ELEVATIONS
6'-0" WIDE FRENCH SECTOR TOP DOORS
W/ 2 SIDELITES**


M.O. Brickmould
M.O. Adams/Flat Casing
Rough Opening
Frame Size
Daylight Opening

104 1/2" [2654]
107 9/16" [2732]
102" [2590]
101 1/4" [2572]
7 1/2" [190] (2)
26 5/8" [676] (2)


108 1/2" [2756]
111 9/16" [2834]
106" [2692]
105 1/4" [2673]
9 1/2" [241] (2)
26 5/8" [676] (2)

112 1/2" [2858]
115 9/16" [2935]
110" [2794]
109 1/4" [2775]
11 1/2" [292] (2)
26 5/8" [676] (2)


84 3/8" [2143]
85 7/8" [2181]
83 1/4" [2114]
82 1/2" [2096]
68 11/16" [1745]



CIFRTS6068Q10




CIFRTS6068Q12




CIFRTS6068Q14


88 3/8" [2245]
89 7/8" [2283]
87 1/4" [2216]
86 1/2" [2197]
72 11/16" [1873]



CIFRTS6070Q10




CIFRTS6070Q12




CIFRTS6070Q14


100 3/8" [2550]
101 7/8" [2588]
99 1/4" [2521]
98 1/2" [2502]
84 11/16" [2151]



CIFRTS6080Q10




CIFRTS6080Q12




CIFRTS6080Q14


112 3/8" [2854]
113 7/8" [2892]
111 1/4" [2825]
110 1/2" [2807]
96 11/16" [2456]



CIFRTS6090Q10



CIFRTS6090Q12



CIFRTS6090Q14

ELEVATION SYMBOL LEGEND:

(F) PANEL IS AVAILABLE AS FIXED ONLY

NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.

M.O. = MASONRY OPENING
VALUES IN [] ARE MILLIMETER CONVERSIONS
VALUES IN () ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" [12.7] from M.O. (Masonry Opening) for Unit Size. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Openings & Masonry Openings page.

**ELEVATIONS
7'-0" WIDE FRENCH SECTOR TOP DOORS
W/ 2 SIDELITES**


M.O. Brickmould
M.O. Adams/Flat Casing
Rough Opening
Frame Size
Daylight Opening

116 1/2" [2959]
119 9/16" [3037]
114" [2895]
113 1/4" [2877]
7 1/2" [190] (2)
32 5/8" [829] (2)


120 1/2" [3061]
123 9/16" [3138]
118" [2997]
117 1/4" [2978]
9 1/2" [241] (2)
32 5/8" [829] (2)

124 1/2" [3162]
127 9/16" [3240]
122" [3098]
121 1/4" [3080]
11 1/2" [292] (2)
32 5/8" [829] (2)


84 3/8" [2143]
85 7/8" [2181]
83 1/4" [2114]
82 1/2" [2096]
68 11/16" [1745]



CIFRTS7068Q10




CIFRTS7068Q12




CIFRTS7068Q14


88 3/8" [2245]
89 7/8" [2283]
87 1/4" [2216]
86 1/2" [2197]
72 11/16" [1846]



CIFRTS7070Q10




CIFRTS7070Q12




CIFRTS7070Q14


100 3/8" [2560]
101 7/8" [2598]
99 1/4" [2531]
98 1/2" [2502]
84 11/16" [2151]



CIFRTS7080Q10



CIFRTS7080Q12



CIFRTS7080Q14

ELEVATION SYMBOL LEGEND:

F PANEL IS AVAILABLE AS FIXED ONLY

NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.

M.O. = MASONRY OPENING
VALUES IN [] ARE MILLIMETER CONVERSIONS
VALUES IN () ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" [12.7] from M.O. (Masonry Opening) for Unit Size. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Openings & Masonry Openings page.

ELEVATIONS
SECTOR TOP TRANSOMS

M.O. Brickmould
M.O. Adams/Flat Casing
Rough Opening
Frame Size
Daylight Opening

28 11/16" [729]
31 3/4" [806]
26 3/16" [665]
25 7/16" [646]
14 5/8" [371]

34 11/16" [881]
37 3/4" [959]
32 3/16" [818]
31 7/16" [799]
20 5/8" [524]

36 11/16" [932]
39 3/4" [1010]
34 3/16" [868]
33 7/16" [849]
22 5/8" [575]

40 11/16" [1033]
43 3/4" [1111]
38 3/16" [970]
37 7/16" [951]
26 5/8" [676]

22 1/2" [572]
24" [607]
20 3/4" [527]
20" [508]
12 15/16" [329]



CTISWTS2018



CTISWTS2618



CTISWTS2818



CTISWTS3018

32 1/2" [826]
34" [864]
30 3/4" [781]
30" [762]
22 15/16" [583]



CTISWTS2026



CTISWTS2626



CTISWTS2826



CTISWTS3026

M.O. Brickmould
M.O. Adams/Flat Casing
Rough Opening
Frame Size
Daylight Opening

53 7/8" [1368]
56 15/16" [1446]
51 3/8" [1304]
50 5/8" [1286]
39 13/16" [1011]

65 7/8" [1673]
68 15/16" [1751]
63 3/8" [1610]
62 5/8" [1591]
51 13/16" [1316]

69 7/8" [1775]
72 15/16" [1853]
67 3/8" [1711]
66 5/8" [1692]
55 13/16" [1418]

77 7/8" [1978]
80 15/16" [2056]
75 3/8" [1914]
74 5/8" [1895]
63 13/16" [1621]

22 1/2" [572]
24" [607]
20 3/4" [527]
20" [508]
12 15/16" [329]



CTIFRTS4018



CTIFRTS5018



CTIFRTS5418



CTIFRTS6018


32 1/2" [826]
34" [864]
30 3/4" [781]
30" [762]
22 15/16" [583]




CTIFRTS4026



CTIFRTS5026



CTIFRTS5426



CTIFRTS6026

ELEVATION SYMBOL LEGEND:

F PANEL IS AVAILABLE AS FIXED ONLY

NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.

M.O. = MASONRY OPENING

VALUES IN [] ARE MILLIMETER CONVERSIONS

VALUES IN () ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" [12.7] from M.O. (Masonry Opening) for Unit Size. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Openings & Masonry Openings page.