
TABLE OF CONTENTS

Single Units	5-18
2 Wide Units	5-22
3 Wide Units	5-25
Picture Units	5-29
Picture Units with 16" Flankers.	5-38
Picture Units with 20" Flankers.	5-39
Picture Radius Units	5-40
Transom Units	5-49
Sector Top Units.	5-52
2 Wide Sector Top Units	5-56
3 Wide Sector Top Units	5-59
Single Radius Units	5-63

SINGLE UNITS ELEVATIONS

M.O. BRICKMOUND 24 7/8"(632)
M.O. ADAMS/FLAT CASING 27 7/8"(708)
ROUGH OPENING 22 1/8"(562)
FRAME SIZE 21 3/8"(543)
DAYLIGHT OPENING 14 13/16"(376)

28 7/8"(733)
31 7/8"(810)
26 1/8"(664)
25 3/8"(645)
18 13/16"(478)


32 7/8"(835)
35 7/8"(911)
30 1/8"(765)
29 3/8"(760)
22 13/16"(579)

34 7/8"(886)
37 7/8"(962)
32 1/8"(816)
31 3/8"(797)
24 13/16"(630)


36 7/8"(937)
39 7/8"(1013)
34 1/8"(867)
33 3/8"(848)
26 13/16"(681)

40 7/8"(1038)
43 7/8"(1114)
38 1/8"(968)
37 3/8"(949)
30 13/16"(783)


44 7/8"(1140)
47 7/8"(1216)
42 1/8"(1070)
41 3/8"(1051)
34 13/16"(884)




SCD2132




SCD2532




SCD2932




SCD3132




SCD3332




SCD3732




SCD4132




SCD2136




SCD2536




SCD2936




SCD3136




SCD3336




SCD3736




SCD4136




SCD2140




SCD2540




SCD2940




SCD3140




SCD3340




SCD3740




SCD4140




SCD2144




SCD2544




SCD2944




SCD3144




SCD3344




SCD3744




SCD4144




SCD2148




SCD2548




SCD2948




SCD3148




SCD3348




SCD3748




SCD4148




SCD2152




SCD2552




SCD2952




SCD3152




SCD3352




SCD3752




SCD4152




SCD2156




SCD2556




SCD2956




SCD3156



SCD3356



SCD3756



SCD4156

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

SINGLE UNITS ELEVATIONS

M.O. BRICKMOUND 24 7/8"(632)
M.O. ADAMS/FLAT CASING 27 7/8"(708)
ROUGH OPENING 22 1/8"(562)
FRAME SIZE 21 3/8"(543)
DAYLIGHT OPENING 14 13/16"(376)

28 7/8"(733)
31 7/8"(810)
26 1/8"(664)
25 3/8"(645)
18 13/16"(478)

32 7/8"(835)
35 7/8"(911)
30 1/8"(765)
29 3/8"(670)
22 13/16"(579)


34 7/8"(886)
37 7/8"(962)
32 1/8"(816)
31 3/8"(797)
24 13/16"(630)

36 7/8"(937)
39 7/8"(1013)
34 1/8"(867)
33 3/8"(848)
26 13/16"(681)


40 7/8"(1038)
43 7/8"(1114)
38 1/8"(968)
37 3/8"(949)
30 13/16"(783)

44 7/8"(1140)
47 7/8"(1216)
42 1/8"(1070)
41 3/8"(1051)
34 13/16"(884)


62 5/16"(1583)
63 13/16"(1621)
60 3/4"(1543)
60"(1524)
25 1/8"(638)[2]




SCD2160




SCD2560




SCD2960




SCD3160



SCD3360




SCD3760




SCD4160


66 5/16"(1684)
67 13/16"(1722)
64 3/4"(1645)
64"(1626)
27 1/8"(689)[2]




SCD2164




SCD2564




SCD2964




SCD3164



SCD3364




SCD3764




SCD4164


70 5/16"(1786)
71 13/16"(1824)
68 3/4"(1746)
68"(1727)
29 1/8"(740)[2]




SCD2168




SCD2568




SCD2968




SCD3168



SCD3368




SCD3768




SCD4168


70 5/16"(1786)
71 13/16"(1824)
68 3/4"(1746)
68"(1727)
35 1/8"(892) 23 1/8"(587)




SCD2168




SCD2568




SCD2968




SCD3168



SCD3368




SCD3768




SCD4168


74 5/16"(1888)
75 13/16"(1926)
72 3/4"(1848)
72"(1829)
31 1/8"(791)[2]




SCD2172




SCD2572




SCD2972




SCD3172



SCD3372



SCD3772



SCD4172

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

SINGLE UNITS ELEVATIONS

M.O. BRICKMOULD 24 7/8"(632)
M.O. ADAMS/FLAT CASING 27 7/8"(708)
ROUGH OPENING 22 1/8"(562)
FRAME SIZE 21 3/8"(543)
DAYLIGHT OPENING 14 13/16"(376)

28 7/8"(733)
31 7/8"(810)
26 1/8"(664)
25 3/8"(645)
18 13/16"(478)

32 7/8"(835)
35 7/8"(911)
30 1/8"(765)
29 3/8"(670)
22 13/16"(579)


34 7/8"(886)
37 7/8"(962)
32 1/8"(816)
31 3/8"(797)
24 13/16"(630)

36 7/8"(937)
39 7/8"(1013)
34 1/8"(867)
33 3/8"(848)
26 13/16"(681)


40 7/8"(1038)
43 7/8"(1114)
38 1/8"(968)
37 3/8"(949)
30 13/16"(783)

44 7/8"(1140)
47 7/8"(1216)
42 1/8"(1070)
41 3/8"(1051)
34 13/16"(884)


78 5/16"(1988)
79 13/16"(2027)
76 3/4"(1949)
76"(1930)
33 1/8"(841)|2|




SCD2176




SCD2576




SCD2976




SCD3176



SCD3376




SCD3776




SCD4176


82 5/16"(2091)
83 13/16"(2129)
80 3/4"(2051)
80"(2032)
35 1/8"(892)|2|




SCD2180




SCD2580




SCD2980




SCD3180



SCD3380




SCD3780




SCD4180


90 5/16"(2294)
91 13/16"(2332)
88 3/4"(2254)
88"(2235)
39 1/8"(994)|2|




SCD2188




SCD2588




SCD2988




SCD3188



SCD3388




SCD3788




SCD4188


94 5/16"(2396)
95 13/16"(2434)
92 3/4"(2356)
92"(2337)
41 1/8"(1045)|2|




SCD2192




SCD2592




SCD2992




SCD3192



SCD3392



SCD3792



SCD4192

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E# BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING


Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

SINGLE UNITS ELEVATIONS

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)

34 5/16"(872)
35 13/16"(910)
32 3/4"(832)
32 1/8"(813)
11 1/8"(283)[2]




SCD4532

38 5/16"(972)
39 13/16"(1011)
36 3/4"(933)
36 (914)
13 1/8"(333)[2]




SCD4536

42 5/16"(1075)
43 13/16"(1113)
40 3/4"(1035)
40 (1016)
15 1/8"(389)[2]




SCD4540

46 5/16"(1176)
47 13/16"(1214)
44 3/4"(1137)
44 (1118)
17 1/8"(435)[2]




SCD4544

50 5/16"(1278)
51 13/16"(1316)
48 3/4"(1238)
48 (1219)
19 1/8"(486)[2]




SCD4548

54 5/16"(1380)
55 13/16"(1418)
52 3/4"(1340)
52 (1321)
21 1/8"(537)[2]



SCD4552

58 5/16"(1481)
59 13/16"(1519)
56 3/4"(1441)
56 (1422)
23 1/8"(587)[2]




SCD4556

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)

62 5/16"(1583)
63 13/16"(1621)
60 3/4"(1543)
60 (1524)
25 1/8"(638)[2]




SCD4560

66 5/16"(1684)
67 13/16"(1722)
64 3/4"(1645)
64 (1626)
27 1/8"(689)[2]




SCD4564

70 5/16"(1786)
71 13/16"(1824)
68 3/4"(1746)
68 (1727)
29 1/8"(740)[2]




SCD4568

70 5/16"(1786)
71 13/16"(1824)
68 3/4"(1746)
68 (1727)
35 7/8"(892) 23 1/8"(587)



SCD4568

74 5/16"(1888)
75 13/16"(1926)
72 3/4"(1848)
72 (1829)
31 1/8"(791)[2]




SCD4572

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)

78 5/16"(1989)
79 13/16"(2027)
76 3/4"(1949)
76 (1930)
33 1/8"(844)[2]




SCD4576

82 5/16"(2091)
83 13/16"(2129)
80 3/4"(2051)
80 (2032)
35 1/8"(892)[2]




SCD4580

90 5/16"(2294)
91 13/16"(2332)
88 3/4"(2254)
88 (2235)
39 1/8"(994)[2]



SCD4588

94 5/16"(2396)
95 13/16"(2434)
92 3/4"(2356)
92 (2337)
41 1/8"(1045)[2]



SCD4592








































































































































ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O. (Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

2 WIDE UNITS
ELEVATIONS

MO BRICKMOLD	46 1/4"(1175)	54 1/4"(1378)	62 1/4"(1581)	66 1/4"(1683)	70 1/4"(1784)	78 1/4"(1988)	86 1/4"(2191)
MO FLAT CASING	49 1/4"(1251)	57 1/4"(1454)	65 1/4"(1657)	69 1/4"(1759)	73 1/4"(1861)	81 1/4"(2064)	89 1/4"(2267)
ROUGH OPENING	43 1/2"(1105)	51 1/2"(1308)	59 1/2"(1511)	63 1/2"(1613)	67 1/2"(1715)	75 1/2"(1918)	83 1/2"(2121)
FRAME SIZE	42 3/4"(1086)	50 3/4"(1289)	58 3/4"(1492)	62 3/4"(1594)	66 3/4"(1695)	74 3/4"(1899)	82 3/4"(2102)
DAYLIGHT OPENING	14 13/16"(376)[2]	18 13/16"(478)[2]	22 13/16"(579)[2]	24 13/16"(630)[2]	26 13/16"(681)[2]	30 13/16"(783)[2]	34 13/16"(884)[2]

34 5/16"(872)									
SCD2132-2	SCD2532-2	SCD2932-2	SCD3132-2	SCD3332-2	SCD3732-2	SCD4132-2			
35 13/16"(910)									
SCD2136-2	SCD2536-2	SCD2936-2	SCD3136-2	SCD3336-2	SCD3736-2	SCD4136-2			
38 5/16"(973)									
SCD2140-2	SCD2540-2	SCD2940-2	SCD3140-2	SCD3340-2	SCD3740-2	SCD4140-2			
39 13/16"(1011)									
SCD2144-2	SCD2544-2	SCD2944-2	SCD3144-2	SCD3344-2	SCD3744-2	SCD4144-2			
39 13/16"(1011)									
SCD2148-2	SCD2548-2	SCD2948-2	SCD3148-2	SCD3348-2	SCD3748-2	SCD4148-2			
40 3/4"(1035)									
SCD2152-2	SCD2552-2	SCD2952-2	SCD3152-2	SCD3352-2	SCD3752-2	SCD4152-2			
40 3/4"(1035)									
SCD2156-2	SCD2556-2	SCD2956-2	SCD3156-2	SCD3356-2	SCD3756-2	SCD4156-2			
40 3/4"(1035)									
SCD2160-2	SCD2560-2	SCD2960-2	SCD3160-2	SCD3360-2	SCD3760-2	SCD4160-2			
40 3/4"(1035)									
SCD2164-2	SCD2564-2	SCD2964-2	SCD3164-2	SCD3364-2	SCD3764-2	SCD4164-2			
42 3/4"(1086)									
SCD2168-2	SCD2568-2	SCD2968-2	SCD3168-2	SCD3368-2	SCD3768-2	SCD4168-2			
42 3/4"(1086)									
SCD2172-2	SCD2572-2	SCD2972-2	SCD3172-2	SCD3372-2	SCD3772-2	SCD4172-2			
42 3/4"(1086)									
SCD2176-2	SCD2576-2	SCD2976-2	SCD3176-2	SCD3376-2	SCD3776-2	SCD4176-2			
42 3/4"(1086)									
SCD2180-2	SCD2580-2	SCD2980-2	SCD3180-2	SCD3380-2	SCD3780-2	SCD4180-2			
42 3/4"(1086)									
SCD2184-2	SCD2584-2	SCD2984-2	SCD3184-2	SCD3384-2	SCD3784-2	SCD4184-2			
42 3/4"(1086)									
SCD2188-2	SCD2588-2	SCD2988-2	SCD3188-2	SCD3388-2	SCD3788-2	SCD4188-2			

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E I BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

Note: Elevations shown DO NOT have exterior trim... Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

2 WIDE UNITS
ELEVATIONS

MO BRICKMOLD	46 1/4"(1175)	54 1/4"(1378)	62 1/4"(1581)	66 1/4"(1683)	70 1/4"(1784)	78 1/4"(1988)	86 1/4"(2191)
MO FLAT CASING	49 1/4"(1251)	57 1/4"(1454)	65 1/4"(1657)	69 1/4"(1759)	73 1/4"(1861)	81 1/4"(2064)	89 1/4"(2267)
ROUGH OPENING	43 1/2"(1105)	51 1/2"(1308)	59 1/2"(1511)	63 1/2"(1613)	67 1/2"(1715)	75 1/2"(1918)	83 1/2"(2121)
FRAME SIZE	42 3/4"(1086)	50 3/4"(1289)	58 3/4"(1492)	62 3/4"(1594)	66 3/4"(1695)	74 3/4"(1899)	82 3/4"(2102)
DAYLIGHT OPENING	14 13/16"(376)[2]	18 13/16"(478)[2]	22 13/16"(579)[2]	24 13/16"(630)[2]	26 13/16"(681)[2]	30 13/16"(783)[2]	34 13/16"(884)[2]

70 5/16"(1766) 71 13/16"(1824) 68 3/4"(1746) 68 1/2"(1727) 35 1/8"(892) 23 7/8"(587)							
74 5/16"(1888) 75 13/16"(1926) 72 3/4"(1848) 72 1/8"(1829) 31 1/8"(791)[2]							
78 5/16"(1989) 79 13/16"(2027) 76 3/4"(1949) 76 1/8"(1930) 33 1/8"(841)[2]							
82 5/16"(2091) 83 13/16"(2129) 80 3/4"(2051) 80 1/2"(2032) 35 1/8"(892)[2]							
90 5/16"(2294) 91 13/16"(2332) 88 3/4"(2254) 88 1/2"(2235) 39 1/8"(994)[2]							
94 5/16"(2396) 95 13/16"(2434) 92 3/4"(2356) 92 1/2"(2337) 41 1/8"(1045)[2]							

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
- BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

2 WIDE UNITS
ELEVATIONS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

94 1/4"(2394)
97 1/4"(2470)
91 1/2"(2324)
90 3/4"(2305)
38 13/16"(986)[2]

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

94 1/4"(2394)
97 1/4"(2470)
91 1/2"(2324)
90 3/4"(2305)
38 13/16"(986)[2]

34 5/16"(872) 35 13/16"(910) 32 3/4"(832) 32"(813) 36"(914) 33 1/8"(833)[2]		SCD4532-2
38 5/16"(973) 39 13/16"(1011) 36 3/4"(933) 36"(914) 36"(914) 13 1/8"(333)[2]		SCD4536-2
42 5/16"(1075) 43 13/16"(1113) 40 3/4"(1035) 40"(1016) 40"(1016) 15 1/8"(384)[2]		SCD4540-2
46 5/16"(1176) 47 13/16"(1214) 44 3/4"(1137) 44"(1118) 44"(1118) 17 1/8"(435)[2]		SCD4544-2
50 5/16"(1278) 51 13/16"(1316) 48 3/4"(1238) 48"(1219) 48"(1219) 19 1/8"(486)[2]		SCD4548-2
54 5/16"(1380) 55 13/16"(1418) 52 3/4"(1340) 52"(1321) 52"(1321) 21 1/8"(537)[2]		SCD4552-2
58 5/16"(1481) 59 13/16"(1519) 56 3/4"(1441) 56"(1422) 56"(1422) 23 1/8"(587)[2]		SCD4556-2
62 5/16"(1583) 63 13/16"(1621) 60 3/4"(1543) 60"(1524) 60"(1524) 25 1/8"(638)[2]		SCD4560-2
66 5/16"(1684) 67 13/16"(1722) 64 3/4"(1645) 64"(1626) 64"(1626) 27 1/8"(689)[2]		SCD4564-2
70 5/16"(1786) 71 13/16"(1824) 68 3/4"(1746) 68"(1727) 68"(1727) 29 1/8"(740)[2]		SCD4568-2

70 5/16"(1786) 71 13/16"(1824) 68 3/4"(1746) 68"(1727) 68"(1727) 35 1/8"(892) 23 1/8"(587)		SCD4568-2
74 5/16"(1888) 75 13/16"(1926) 72 3/4"(1848) 72"(1829) 72"(1829) 31 1/8"(791)[2]		SCD4572-2
78 5/16"(1989) 79 13/16"(2027) 76 3/4"(1949) 76"(1930) 76"(1930) 33 1/8"(841)[2]		SCD4576-2
82 5/16"(2091) 83 13/16"(2129) 80 3/4"(2051) 80"(2032) 80"(2032) 35 1/8"(892)[2]		SCD4580-2
90 5/16"(2294) 91 13/16"(2332) 88 3/4"(2254) 88"(2235) 88"(2235) 39 1/8"(994)[2]		SCD4584-2
94 5/16"(2396) 95 13/16"(2434) 92 3/4"(2356) 92"(2337) 92"(2337) 41 1/8"(1045)[2]		SCD4588-2
		SCD4592-2

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

3 WIDE UNITS
ELEVATIONS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

67 5/8"(1718)
70 5/8"(1794)
64 7/8"(1648)
64 1/8"(1629)
14 13/16"(376)[3]

79 5/8"(2022)
82 5/8"(2099)
76 7/8"(1953)
76 1/8"(1934)
18 13/16"(478)[3]

91 5/8"(2328)
94 5/8"(2403)
88 7/8"(2257)
88 1/8"(1492)
22 13/16"(579)[3]

97 5/8"(2480)
100 5/8"(2556)
94 7/8"(2410)
94 1/8"(1594)
24 13/16"(630)[3]

103 5/8"(2632)
106 5/8"(2708)
100 7/8"(2562)
100 1/8"(2543)
26 13/16"(681)[3]

115 5/8"(2937)
118 5/8"(3013)
112 7/8"(2867)
112 1/8"(1899)
30 13/16"(783)[3]

34 5/16"(872) 35 13/16"(910) 32 3/4"(832) 32"(813)						
38 5/16"(973) 39 13/16"(1011) 36 3/4"(933) 36"(914)						
42 5/16"(1075) 43 13/16"(1113) 40 3/4"(1035) 40"(1016)						
46 5/16"(1176) 47 13/16"(1214) 44 3/4"(1137) 44"(1118)						
50 5/16"(1278) 51 13/16"(1316) 48 3/4"(1238) 48"(1219)						
54 5/16"(1380) 55 13/16"(1418) 52 3/4"(1340) 52"(1321)						
58 5/16"(1481) 59 13/16"(1519) 56 3/4"(1441) 56"(1422)						
62 5/16"(1583) 63 13/16"(1621) 60 3/4"(1543) 60"(1524)						
66 5/16"(1684) 67 13/16"(1722) 64 3/4"(1645) 64"(1626)						
70 5/16"(1786) 71 13/16"(1824) 68 3/4"(1746) 68"(1727)						

ELEVATION SYMBOL LEGEND:


M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


3 WIDE UNITS
ELEVATIONS

MO BRICKMOLD	67 5/8"(1718)	79 5/8"(2022)	91 5/8"(2327)	97 5/8"(2480)	103 5/8"(2632)	115 5/8"(2937)
MO FLAT CASING	70 5/8"(1794)	82 5/8"(2099)	94 5/8"(2403)	100 5/8"(2556)	106 5/8"(2708)	118 5/8"(3013)
ROUGH OPENING	64 7/8"(1648)	76 7/8"(1953)	88 7/8"(2257)	94 7/8"(2410)	100 7/8"(2562)	112 7/8"(2867)
FRAME SIZE	64 1/8"(1629)	76 1/8"(1934)	88 1/8"(2237)	94 1/8"(2390)	100 1/8"(2542)	112 1/8"(2847)
DAYLIGHT OPENING	14 13/16"(376)[3]	18 13/16"(478)[3]	22 13/16"(579)[3]	24 13/16"(630)[3]	26 13/16"(681)[3]	30 13/16"(783)[3]


70 5/16"(1786)
71 13/16"(1824)
68 3/4"(1746)
68 1/2"(1727)
35 1/8"(892) 23 1/8"(587)

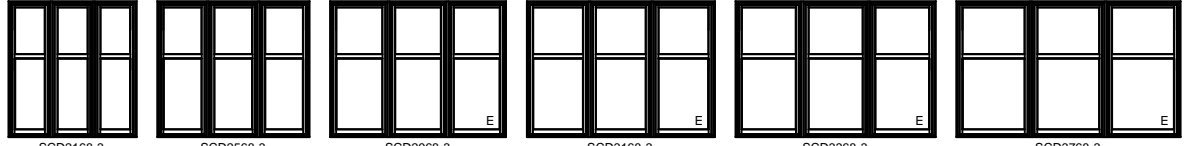


74 5/16"(1888)
75 13/16"(1926)
72 3/4"(1848)
72 1/2"(1829)
31 1/8"(791)[2]



78 5/16"(1989)
79 13/16"(2027)
76 3/4"(1949)
76 1/2"(1930)
33 1/8"(841)[2]




82 5/16"(2091)
83 13/16"(2129)
80 3/4"(2051)
80 1/2"(2032)
35 1/8"(892)[2]



90 5/16"(2294)
91 13/16"(2332)
88 3/4"(2254)
88 1/2"(2235)
39 1/8"(994)[2]



94 5/16"(2396)
95 13/16"(2434)
92 3/4"(2356)
92 1/2"(2337)
41 1/8"(1045)[2]

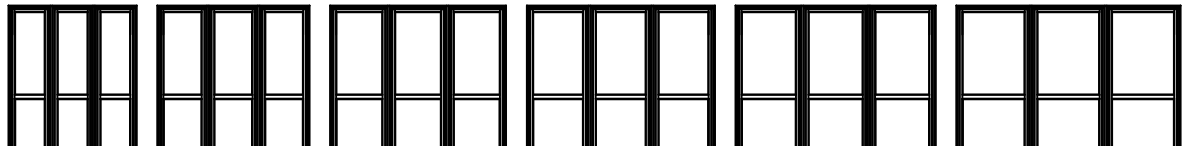

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

3 WIDE UNITS
ELEVATIONS

MO BRICKMOLD	127 5/8"(3242)	139 5/8"(3546)
MO FLAT CASING	130 5/8"(3318)	142 5/8"(3623)
ROUGH OPENING	124 7/8"(3172)	136 7/8"(3477)
FRAME SIZE	124 1/8"(3153)	136 1/8"(3458)
DAYLIGHT OPENING	34 13/16"(884)[3]	38 13/16"(986)[3]
34 5/16"(872) 35 13/16"(910) 32 3/4"(832) 32"(813)		
38 5/16"(973) 39 13/16"(1011) 36 3/4"(933) 36"(914)		
42 5/16"(1075) 43 13/16"(1113) 40 3/4"(1035) 40"(1016)		
46 5/16"(1176) 47 13/16"(1214) 44 3/4"(1137) 44"(1118)		
50 5/16"(1278) 51 13/16"(1316) 48 3/4"(1238) 48"(1219)		
54 5/16"(1380) 55 13/16"(1418) 52 3/4"(1340) 52"(1321)		
58 5/16"(1481) 59 13/16"(1519) 56 3/4"(1441) 56"(1422)		
62 5/16"(1583) 63 13/16"(1621) 60 3/4"(1543) 60"(1524)		
66 5/16"(1684) 67 13/16"(1722) 64 3/4"(1646) 64"(1626)		
70 5/16"(1786) 71 13/16"(1824) 68 3/4"(1746) 68"(1727)		

ELEVATION SYMBOL LEGEND:
M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E 1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


3 WIDE UNITS
ELEVATIONS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


127 5/8"(3242)
130 5/8"(3318)
124 7/8"(3172)
124 1/8"(3153)
34 13/16"(884)[3]

139 5/8"(3546)
142 5/8"(3623)
136 7/8"(3477)
136 1/8"(3458)
38 13/16"(986)[3]

70 5/16"(1786)
71 13/16"(1824)
68 3/4"(1746)
68"(1727)
35 1/8"(892) 23 1/8"(587)




SCD4168-3



SCD4568-3

74 5/16"(1888)
75 13/16"(1926)
72 3/4"(1848)
72"(1829)
31 1/8"(791)[2]




SCD4172-3




SCD4572-3

78 5/16"(1989)
79 13/16"(2027)
76 3/4"(1949)
76"(1930)
33 1/8"(841)[2]



SCD4176-3



SCD4576-3

82 5/16"(2091)
83 13/16"(2129)
80 3/4"(2051)
80"(2032)
35 1/8"(892)[2]




SCD4180-3




SCD4580-3

90 5/16"(2294)
91 13/16"(2332)
88 3/4"(2254)
88"(2235)
39 1/8"(994)[2]




SCD4188-3




SCD4588-3

94 5/16"(2396)
95 13/16"(2434)
92 3/4"(2356)
92"(2337)
41 1/8"(1045)[2]



SCD4192-3



SCD4592-3

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E 1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE ELEVATIONS

M.O. BRICKMOUND 24 7/8"(632)
M.O. ADAMS/FLAT CASING 27 7/8"(708)
ROUGH OPENING 22 1/8"(562)
FRAME SIZE 21 3/8"(543)
DAYLIGHT OPENING 14 13/16"(376)

28 7/8"(733)
31 7/8"(810)
26 1/8"(664)
25 3/8"(645)
18 13/16"(478)

32 7/8"(835)
35 7/8"(911)
30 1/8"(765)
29 3/8"(670)
22 13/16"(579)


34 7/8"(886)
37 7/8"(962)
32 1/8"(816)
31 3/8"(797)
24 13/16"(630)

36 7/8"(937)
39 7/8"(1013)
34 1/8"(867)
33 3/8"(848)
26 13/16"(681)


40 7/8"(1038)
43 7/8"(1114)
38 1/8"(968)
37 3/8"(949)
30 13/16"(783)

44 7/8"(1140)
47 7/8"(1216)
42 1/8"(1070)
41 3/8"(1051)
34 13/16"(884)


34 5/16"(872)
35 13/16"(910)
32 3/4"(832)
32"(813)
24 11/16"(627)




SCDP2132




SCDP2532




SCDP2932




SCDP3132



SCDP3332




SCDP3732




SCDP4132


38 5/16"(973)
39 13/16"(1011)
36 3/4"(933)
36"(914)
28 11/16"(729)




SCDP2136




SCDP2536




SCDP2936




SCDP3136



SCDP3336




SCDP3736




SCDP4136


42 5/16"(1075)
43 13/16"(1113)
40 3/4"(1035)
40"(1016)
32 11/16"(830)




SCDP2140




SCDP2540




SCDP2940




SCDP3140



SCDP3340



SCDP3740




SCDP4140


46 5/16"(1176)
47 13/16"(1214)
44 3/4"(1137)
44"(1118)
36 11/16"(932)




SCDP2144




SCDP2544




SCDP2944




SCDP3144



SCDP3344



SCDP3744




SCDP4144


50 5/16"(1278)
51 13/16"(1316)
48 3/4"(1238)
48"(1219)
40 11/16"(1033)




SCDP2148




SCDP2548




SCDP2948




SCDP3148



SCDP3348



SCDP3748




SCDP4148


54 5/16"(1380)
55 13/16"(1418)
52 3/4"(1340)
52"(1321)
44 11/16"(1135)




SCDP2152




SCDP2552




SCDP2952




SCDP3152



SCDP3352



SCDP3752




SCDP4152


58 5/16"(1481)
59 13/16"(1519)
56 3/4"(1441)
56"(1422)
48 11/16"(1237)




SCDP2156




SCDP2556




SCDP2956




SCDP3156



SCDP3356



SCDP3756



SCDP4156

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE ELEVATIONS

M.O. BRICKMOUND 24 7/8"(632)
M.O. ADAMS/FLAT CASING 27 7/8"(708)
ROUGH OPENING 22 1/8"(562)
FRAME SIZE 21 3/8"(543)
DAYLIGHT OPENING 14 13/16"(376)

28 7/8"(733)
31 7/8"(810)
26 1/8"(664)
25 3/8"(645)
18 13/16"(478)

32 7/8"(835)
35 7/8"(911)
30 1/8"(765)
29 3/8"(670)
22 13/16"(579)






34 7/8"(886)
37 7/8"(962)
32 1/8"(816)
31 3/8"(797)
24 13/16"(630)

36 7/8"(937)
39 7/8"(1013)
34 1/8"(867)
33 3/8"(848)
26 13/16"(681)






40 7/8"(1038)
43 7/8"(1114)
38 1/8"(968)
37 3/8"(949)
30 13/16"(783)

44 7/8"(1140)
47 7/8"(1216)
42 1/8"(1070)
41 3/8"(1051)
34 13/16"(884)





62 5/16"(1583)
63 13/16"(1621)
60 3/4"(1543)
60"(1524)
52 11/16"(1338)








66 5/16"(1684)
67 13/16"(1722)
64 3/4"(1645)
64"(1626)
56 11/16"(1440)



70 5/16"(1786)
71 13/16"(1824)
68 3/4"(1746)
68"(1727)
60 11/16"(1541)



74 5/16"(1888)
75 13/16"(1926)
72 3/4"(1848)
72"(1829)
64 11/16"(1643)



ELEVATION SYMBOL LEGEND:

VALUES IN () ARE IN MILLIMETER CONVERSIONS

E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS

NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE ELEVATIONS

M.O. BRICKMOUND 24 7/8"(632)
M.O. ADAMS/FLAT CASING 27 7/8"(708)
ROUGH OPENING 22 1/8"(562)
FRAME SIZE 21 3/8"(543)
DAYLIGHT OPENING 14 13/16"(376)

28 7/8"(733)
31 7/8"(810)
26 1/8"(664)
25 3/8"(645)
18 13/16"(478)

32 7/8"(835)
35 7/8"(911)
30 1/8"(765)
29 3/8"(670)
22 13/16"(579)

34 7/8"(886)
37 7/8"(962)
32 1/8"(816)
31 3/8"(797)
24 13/16"(630)

36 7/8"(937)
39 7/8"(1013)
34 1/8"(867)
33 3/8"(848)
26 13/16"(681)


40 7/8"(1038)
43 7/8"(1114)
38 1/8"(968)
37 3/8"(949)
30 13/16"(783)

44 7/8"(1140)
47 7/8"(1216)
42 1/8"(1070)
41 3/8"(1051)
34 13/16"(884)

78 5/16"(1989)
79 13/16"(2027)
76 3/4"(1949)
76 1/8"(1930)
68 11/16"(1745)




SCDP2176




SCDP2576




SCDP2976




SCDP3176



SCDP3376



SCDP3776




SCDP4176

82 5/16"(2091)
83 13/16"(2129)
80 3/4"(2051)
80 1/8"(2032)
72 11/16"(1846)




SCDP2180




SCDP2580




SCDP2980




SCDP3180



SCDP3380



SCDP3780




SCDP4180

90 5/16"(2294)
91 13/16"(2332)
88 3/4"(2254)
88 1/8"(2235)
80 11/16"(2048)




SCDP2188




SCDP2588




SCDP2988




SCDP3188



SCDP3388



SCDP3788




SCDP4188

94 5/16"(2396)
95 13/16"(2434)
92 3/4"(2356)
92 1/8"(2337)
84 11/16"(2151)




SCDP2192




SCDP2592




SCDP2992




SCDP3192



SCDP3392



SCDP3792



SCDP4192

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE ELEVATIONS

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)

52 7/8"(1343)
55 7/8"(1419)
50 1/8"(1273)
49 3/8"(1254)
42 13/16"(1087)

56 7/8"(1445)
59 7/8"(1521)
54 1/8"(1375)
53 3/8"(1356)
46 13/16"(1189)

64 7/8"(1648)
67 7/8"(1724)
62 1/8"(1578)
61 3/8"(1559)
54 13/16"(1392)

34 5/16"(872)
35 13/16"(910)
32 3/4"(832)
32 1/8"(813)
24 11/16"(627)



SCDP4532



SCDP4932




SCDP5332




SCDP6132

38 5/16"(973)
39 13/16"(1011)
36 3/4"(933)
36 9/14"
28 11/16"(729)



SCDP4536



SCDP4936




SCDP5336




SCDP6136


42 5/16"(1075)
43 13/16"(1113)
40 3/4"(1035)
40 1/10"
32 11/16"(830)



SCDP4540



SCDP4940




SCDP5340




SCDP6140


46 5/16"(1176)
47 13/16"(1214)
44 3/4"(1137)
44 1/18"
36 11/16"(932)



SCDP4544



SCDP4944




SCDP5344




SCDP6144


50 5/16"(1278)
51 13/16"(1316)
48 3/4"(1238)
48 1/2"
40 11/16"(1033)



SCDP4548



SCDP4948




SCDP5348




SCDP6148


54 5/16"(1390)
55 13/16"(1428)
52 3/4"(1350)
52 1/32"
44 11/16"(1135)




SCDP4552



SCDP4952




SCDP5352




SCDP6152


58 5/16"(1481)
59 13/16"(1519)
56 3/4"(1441)
56 1/4"
48 11/16"(1237)




SCDP4556



SCDP4956



SCDP5356



SCDP6156

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O. (Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE ELEVATIONS

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)

52 7/8"(1343)
55 7/8"(1419)
50 1/8"(1273)
49 3/8"(1254)
42 13/16"(1087)


56 7/8"(1445)
59 7/8"(1521)
54 1/8"(1375)
53 3/8"(1356)
46 13/16"(1189)

64 7/8"(1648)
67 7/8"(1724)
62 1/8"(1578)
61 3/8"(1559)
54 13/16"(1392)


62 5/16"(1593)
63 13/16"(1621)
60 3/4"(1543)
60"(1524)
52 11/16"(1338)




SCDP4560



SCDP4960




SCDP5360




SCDP6160


66 5/16"(1684)
67 13/16"(1722)
64 3/4"(1645)
64"(1626)
56 11/16"(1440)




SCDP4564



SCDP4964




SCDP5364




SCDP6164


70 5/16"(1786)
71 13/16"(1824)
68 3/4"(1746)
68"(1727)
60 11/16"(1541)




SCDP4568



SCDP4968




SCDP5368




SCDP6168


74 5/16"(1898)
75 13/16"(1926)
72 3/4"(1848)
72"(1829)
64 11/16"(1643)



SCDP4972



SCDP5372



SCDP6172

VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE ELEVATIONS

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)

52 7/8"(1343)
55 7/8"(1419)
50 1/8"(1273)
49 3/8"(1254)
42 13/16"(1087)


56 7/8"(1445)
59 7/8"(1521)
54 1/8"(1375)
53 3/8"(1356)
46 13/16"(1189)

64 7/8"(1648)
67 7/8"(1724)
62 1/8"(1578)
61 3/8"(1559)
54 13/16"(1392)


78 5/16"(1989)
79 13/16"(2027)
76 3/4"(1949)
76"(1930)
68 11/16"(1745)




SCDP4576



SCDP4976




SCDP5376




SCDP6176


82 5/16"(2091)
83 13/16"(2129)
80 3/4"(2051)
80"(2032)
72 11/16"(1846)




SCDP4580



SCDP4980




SCDP5380




SCDP6180


90 5/16"(2294)
91 13/16"(2332)
88 3/4"(2254)
88"(2235)
80 11/16"(2049)




SCDP4588



SCDP4988




SCDP5388

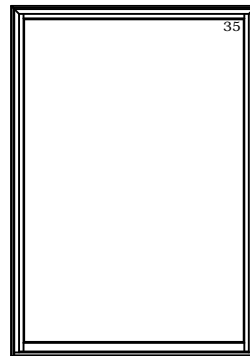


SCDP6188


94 5/16"(2396)
95 13/16"(2434)
92 3/4"(2356)
92"(2337)
84 11/16"(2161)




SCDP4592

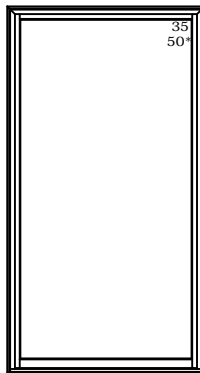

SCDP4992

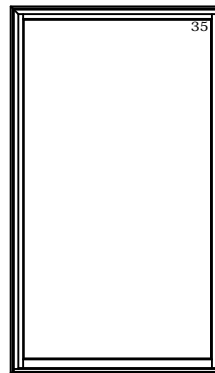

SCDP5392

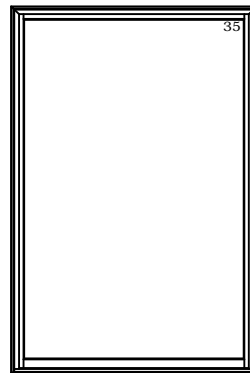

SCDP6192

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE ELEVATIONS

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

72 7/8"(1851)
75 7/8"(1927)
70 1/8"(1781)
69 3/8"(1762)
62 13/16"(1595)

80 7/8"(2054)
83 7/8"(2130)
78 1/8"(1984)
77 3/8"(1965)
70 13/16"(1799)

34 5/16"(872)
35 13/16(910)
32 3/4(832)
24 11/16(627)



SCDP6932



SCDP7732

38 5/16"(973)
39 13/16(1011)
36 3/4(933)
28 11/16(729)



SCDP6936



SCDP7736

42 5/16"(1075)
43 13/16(1113)
40 3/4(1035)
32 11/16(830)



SCDP6940



SCDP7740

46 5/16"(1176)
47 13/16(1214)
44 3/4(1137)
36 11/16(932)



SCDP6944



SCDP7744

50 5/16"(1278)
51 13/16(1316)
48 3/4(1238)
40 11/16(1033)



SCDP6948



SCDP7748

54 5/16"(1380)
55 13/16(1418)
52 3/4(1340)
44 11/16(1135)




SCDP6952



SCDP7752

58 5/16"(1481)
59 13/16(1519)
56 3/4(1441)
48 11/16(1237)



SCDP6956



SCDP7756

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- # NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O. (Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


PICTURE ELEVATIONS

M.O. BRICKMOUND
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

72 7/8"(1851)
75 7/8"(1927)
70 1/8"(1781)
69 3/8"(1762)
62 13/16"(1595)

80 7/8"(2054)
83 7/8"(2130)
78 1/8"(1984)
77 3/8"(1965)
70 13/16"(1799)

62 5/16"(1583)
63 13/16"(1621)
60 3/4"(1543)
60"(1524)
52 11/16"(1338)




SCDP6960




SCDP7760

66 5/16"(1664)
67 13/16"(1722)
64 3/4"(1645)
64"(1626)
56 11/16"(1440)




SCDP6964




SCDP7764

70 5/16"(1786)
71 13/16"(1824)
68 3/4"(1746)
68"(1727)
60 11/16"(1541)




SCDP6968




SCDP7768

74 5/16"(1886)
75 13/16"(1926)
72 3/4"(1848)
72"(1829)
64 11/16"(1643)



ELEVATION SYMBOL LEGEND:



SCDP7772

VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


PICTURE ELEVATIONS

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


72 7/8"(1851)
75 7/8"(1927)
70 1/8"(1781)
69 3/8"(1762)
62 13/16"(1595)

80 7/8"(2054)
83 7/8"(2130)
78 1/8"(1984)
77 3/8"(1965)
70 13/16"(1799)

78 5/16"(1989)
79 13/16"(2027)
76 3/4"(1949)
76"(1930)
68 11/16"(1745)




SCDP6976




SCDP7776

82 5/16"(2091)
83 13/16"(2129)
80 3/4"(2051)
80"(2032)
72 11/16"(1846)




SCDP6980




SCDP7780

90 5/16"(2294)
91 13/16"(2332)
88 3/4"(2254)
88"(2235)
80 11/16"(2049)

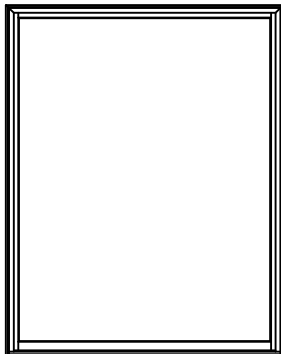


SCDP6988




SCDP7788

94 5/16"(2396)
95 13/16"(2434)
92 3/4"(2356)
92"(2337)
84 11/16"(2151)

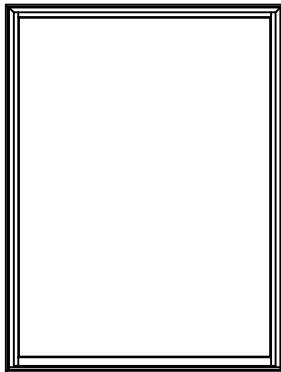

SCDP6992



SCDP7792







ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE WITH 16" FLANKERS
ELEVATIONS

MO BRICKMOLD	99 5/8"(2530)	107 5/8"(2734)
MO FLAT CASING	102 5/8"(2607)	110 5/8"(2810)
ROUGH OPENING	96 7/8"(2461)	104 7/8"(2664)
FRAME SIZE	96 1/8"(2442)	104 1/8"(2645)
DAYLIGHT OPENING	14 13/16"(376)[2] 46 13/16"(1189)	14 13/16"(376)[2] 54 13/16"(1392)

54 5/16"(1380)		
55 13/16"(1418)	SCD5352-16	SCD6152-16
52 3/4"(1340)		
52"(1321)		
21 1/8"(537)[2]		
58 5/16"(1451)		
59 13/16"(1519)	SCD5356-16	SCD6156-16
56 3/4"(1441)		
56"(1422)		
23 1/8"(587)[2]		
66 5/16"(1684)		
67 13/16"(1722)	SCD5364-16	SCD6164-16
64 3/4"(1645)		
64"(1626)		
27 1/8"(689)[2]		


ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
 E 1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE WITH 20" FLANKERS
ELEVATIONS

MO BRICKMOLD	107 5/8"(2734)	115 5/8"(2937)
MO FLAT CASING	110 5/8"(2810)	118 5/8"(3013)
ROUGH OPENING	104 7/8"(2664)	112 7/8"(2867)
FRAME SIZE	104 1/8"(2645)	112 1/8"(2848)
DAYLIGHT OPENING	18 13/16"(478)[2] 46 13/16"(1189)	18 13/16"(478)[2] 54 13/16"(1392)

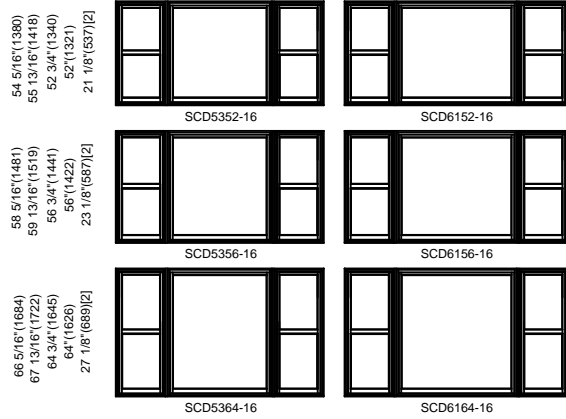

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
 E I BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE RADIUS UNITS
ELEVATIONS

M.O. BRICKMOUND	24 7/8"(632)	28 7/8"(733)	32 7/8"(835)	34 7/8"(886)	36 7/8"(937)	40 7/8"(1038)	44 7/8"(1140)
M.O. ADAMS/FLAT CASING	27 7/8"(708)	31 7/8"(810)	35 7/8"(911)	37 7/8"(962)	39 7/8"(1013)	43 7/8"(1114)	47 7/8"(1216)
ROUGH OPENING	22 1/8"(562)	26 1/8"(664)	30 1/8"(765)	32 1/8"(816)	34 1/8"(867)	38 1/8"(968)	42 1/8"(1070)
FRAME SIZE	21 3/8"(543)	25 3/8"(645)	29 3/8"(747)	31 3/8"(797)	33 3/8"(848)	37 3/8"(949)	41 3/8"(1051)
DAYLIGHT OPENING	14 13/16"(376)	18 13/16"(478)	22 13/16"(579)	24 13/16"(630)	26 13/16"(681)	30 13/16"(783)	34 13/16"(884)
54 5/16"(1380) 55 13/16"(1418) 52 3/4"(1340) 52"(1321) 44 11/16"(1135)							
58 5/16"(1481) 59 13/16"(1519) 56 3/4"(1441) 56"(1422) 48 11/16"(1237)							
62 5/16"(1583) 63 13/16"(1621) 60 3/4"(1543) 60"(1524) 52 11/16"(1338)							
66 5/16"(1684) 67 13/16"(1722) 64 3/4"(1645) 64"(1626) 56 11/16"(1440)							
70 5/16"(1786) 71 13/16"(1824) 68 3/4"(1746) 68"(1727) 60 11/16"(1541)							

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE RADIUS UNITS
ELEVATIONS

M.O. BRICKMOULD 24 7/8"(632)
M.O. ADAMS/FLAT CASING 27 7/8"(708)
ROUGH OPENING 22 1/8"(562)
FRAME SIZE 21 3/8"(543)
DAYLIGHT OPENING 14 13/16"(376)

28 7/8"(733)
31 7/8"(810)
26 1/8"(664)
25 3/8"(645)
18 13/16"(478)

32 7/8"(835)
35 7/8"(911)
30 1/8"(765)
29 3/8"(770)
22 13/16"(579)

34 7/8"(886)
37 7/8"(962)
32 1/8"(816)
31 3/8"(797)
24 13/16"(630)

36 7/8"(937)
39 7/8"(1013)
34 1/8"(867)
33 3/8"(848)
26 13/16"(681)


40 7/8"(1038)
43 7/8"(1114)
38 1/8"(968)
37 3/8"(949)
30 13/16"(783)

44 7/8"(1140)
47 7/8"(1216)
42 1/8"(1070)
41 3/8"(1051)
34 13/16"(884)


74 5/16"(1888)
75 13/16"(1926)
72 3/4"(1848)
72 1/8"(1829)
64 11/16"(1643)




SCDHP2172




SCDHP2572




SCDHP2972




SCDHP3172



SCDHP3372



SCDHP3772




SCDHP4172


78 5/16"(1989)
79 13/16"(2027)
76 3/4"(1949)
76 1/8"(1930)
68 11/16"(1745)




SCDHP2176




SCDHP2576




SCDHP2976




SCDHP3176



SCDHP3376



SCDHP3776




SCDHP4176


82 5/16"(2091)
83 13/16"(2129)
80 3/4"(2051)
80 1/8"(2032)
72 11/16"(1846)




SCDHP2180




SCDHP2580




SCDHP2980




SCDHP3180



SCDHP3380



SCDHP3780




SCDHP4180


90 5/16"(2294)
91 13/16"(2332)
88 3/4"(2254)
88 1/8"(2235)
80 11/16"(2049)



SCDHP2188




SCDHP2588




SCDHP2988




SCDHP3188



SCDHP3388



SCDHP3788



SCDHP4188

ELEVATION SYMBOL LEGEND:


- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE RADIUS UNITS
ELEVATIONS

M.O. BRICKMOULD	24 7/8"(632)	28 7/8"(733)	32 7/8"(835)	34 7/8"(886)	36 7/8"(937)	40 7/8"(1038)	44 7/8"(1140)
M.O. ADAMS/FLAT CASING	27 7/8"(708)	31 7/8"(810)	35 7/8"(911)	37 7/8"(962)	39 7/8"(1013)	43 7/8"(1114)	47 7/8"(1216)
ROUGH OPENING	22 1/8"(562)	26 1/8"(664)	30 1/8"(765)	32 1/8"(816)	34 1/8"(867)	38 1/8"(968)	42 1/8"(1070)
FRAME SIZE	21 3/8"(543)	25 3/8"(645)	29 3/8"(747)	31 3/8"(797)	33 3/8"(849)	37 3/8"(949)	41 3/8"(1051)
DAYLIGHT OPENING	14 13/16"(376)	18 13/16"(478)	22 13/16"(579)	24 13/16"(630)	26 13/16"(681)	30 13/16"(783)	34 13/16"(884)

94 5/16"(2386)
95 13/16"(2434)
92 3/4"(2366)
92"(2337)
84 11/16"(2151)

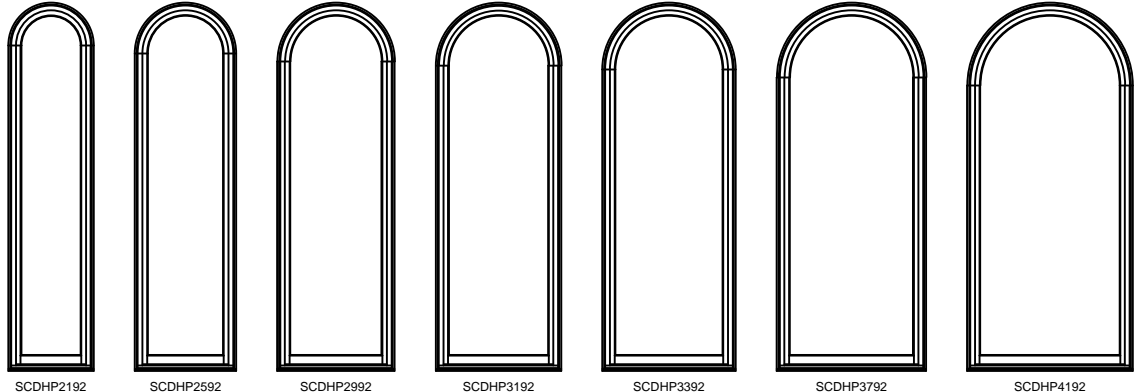

SCDHP2192 SCDHP2592 SCDHP2992 SCDHP3192 SCDHP3392 SCDHP3792 SCDHP4192

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE RADIUS UNITS
ELEVATIONS





















M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)

52 7/8"(1343)
55 7/8"(1419)
50 1/8"(1273)
49 3/8"(1254)
42 13/16"(1087)

56 7/8"(1445)
59 7/8"(1521)
54 1/8"(1375)
53 3/8"(1356)
46 13/16"(1189)

64 7/8"(1648)
67 7/8"(1724)
62 1/8"(1578)
61 3/8"(1559)
54 13/16"(1392)

54 5/16"(1380) 55 13/16"(1418) 52 3/4"(1340) 52 1/2"(1321) 44 11/16"(1135)				
58 5/16"(1481) 59 13/16"(1519) 56 3/4"(1441) 56 1/2"(1422) 48 11/16"(1237)				
62 5/16"(1583) 63 13/16"(1621) 60 3/4"(1543) 60 1/2"(1524) 52 11/16"(1338)				
66 5/16"(1684) 67 13/16"(1722) 64 3/4"(1645) 64 1/2"(1626) 56 11/16"(1440)				
70 5/16"(1786) 71 13/16"(1824) 68 3/4"(1746) 68 1/2"(1727) 60 11/16"(1541)				

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
 ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O. (Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE RADIUS UNITS
ELEVATIONS

M.O. BRICKMOUND
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)

52 7/8"(1343)
55 7/8"(1419)
50 1/8"(1273)
49 3/8"(1254)
42 13/16"(1087)


56 7/8"(1445)
59 7/8"(1521)
54 1/8"(1375)
53 3/8"(1356)
46 13/16"(1189)

64 7/8"(1648)
67 7/8"(1724)
62 1/8"(1578)
61 3/8"(1559)
54 13/16"(1392)


74 5/16"(1888)
75 13/16"(1926)
72 3/4"(1848)
72"(1829)
64 11/16"(1643)




SCDHP4572



SCDHP4972




SCDHP5372




SCDHP6172


78 5/16"(1989)
79 13/16"(2027)
76 3/4"(1949)
76"(1930)
68 11/16"(1745)




SCDHP4576



SCDHP4976




SCDHP5376




SCDHP6176


82 5/16"(2091)
83 13/16"(2129)
80 3/4"(2051)
80"(2032)
72 11/16"(1846)




SCDHP4580



SCDHP4980




SCDHP5380




SCDHP6180


90 5/16"(2294)
91 13/16"(2332)
88 3/4"(2254)
88"(2235)
80 11/16"(2049)




SCDHP4588



SCDHP4988

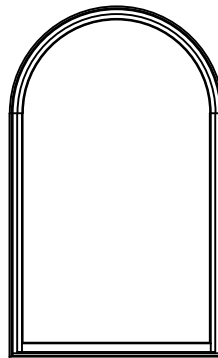

SCDHP5388

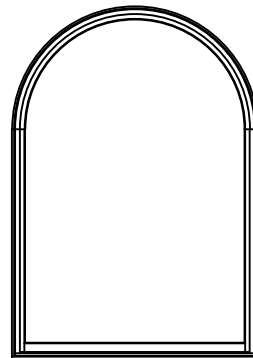

SCDHP6188

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE RADIUS UNITS
ELEVATIONS


M.O. BRICKMOULD 48 7/8"(1241)
M.O. ADAMS/FLAT CASING 51 7/8"(1318)
ROUGH OPENING 46 1/8"(1172)
FRAME SIZE 45 3/8"(1153)
DAYLIGHT OPENING 38 13/16"(986)

52 7/8"(1343)
55 7/8"(1419)
50 1/8"(1273)
49 3/8"(1254)
42 13/16"(1087)


56 7/8"(1445)
59 7/8"(1521)
54 1/8"(1375)
53 3/8"(1356)
46 13/16"(1189)

64 7/8"(1648)
67 7/8"(1724)
62 1/8"(1578)
61 3/8"(1559)
54 13/16"(1392)


94 5/16"(2396)
95 13/16"(2434)
92 3/4"(2356)
92 (2337)
84 11/16"(2151)




SCDHP4592

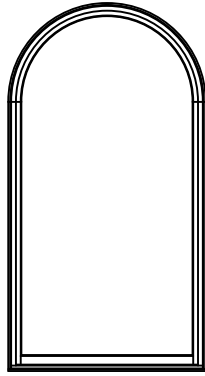

SCDHP4992

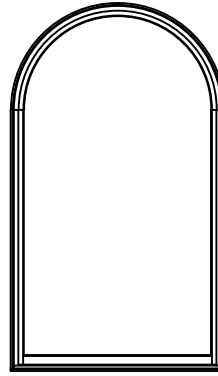

SCDHP5392

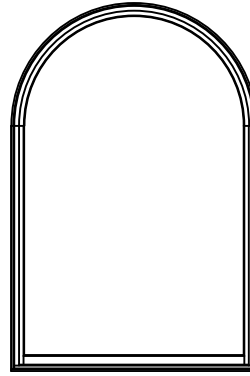

SCDHP6192

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
 ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


PICTURE RADIUS UNITS
ELEVATIONS

M.O. BRICKMOUND
V.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


72 7/8"(1851)
75 7/8"(1927)
70 1/8"(1781)
69 3/8"(1762)
62 13/16"(1595)

80 7/8"(2054)
83 7/8"(2130)
78 1/8"(1984)
77 3/8"(1965)
70 13/16"(1799)

54 5/16"(1380)
55 13/16"(1416)
52 3/4"(1340)
52 1/2"(1321)
44 11/16"(1135)




SCDHP6952




SCDHP7752

55 5/16"(1481)
55 13/16"(1519)
56 3/4"(1441)
56 1/2"(1423)
48 11/16"(1237)




SCDHP6956




SCDHP7756

62 5/16"(1583)
63 13/16"(1621)
60 3/4"(1543)
60"(1524)
52 11/16"(1338)




SCDHP6960




SCDHP7760

66 5/16"(1684)
67 13/16"(1722)
64 3/4"(1645)
64"(1626)
56 11/16"(1440)




SCDHP6964




SCDHP7764

70 5/16"(1786)
71 13/16"(1824)
68 3/4"(1746)
68"(1727)
60 11/16"(1541)



SCDHP6968



SCDHP7768

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O. (Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


PICTURE RADIUS UNITS
ELEVATIONS

M.O. BRICKMOUND
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


72 7/8"(1851)
75 7/8"(1927)
70 1/8"(1781)
69 3/8"(1762)
62 13/16"(1595)

80 7/8"(2054)
83 7/8"(2130)
78 1/8"(1984)
77 3/8"(1965)
70 13/16"(1799)

74 5/16"(1888)
75 0"(1928)
72 3/4"(1828)
64 11/16"(1643)




SCDHP6972




SCDHP7772

78 5/16"(1989)
79 13/16"(2027)
76 3/4"(1949)
68 11/16"(1745)




SCDHP6976




SCDHP7776

82 5/16"(2091)
83 13/16"(2129)
80 3/4"(2051)
72 11/16"(1846)




SCDHP6980




SCDHP7780

90 5/16"(2294)
91 13/16"(2332)
88 3/4"(2254)
80 11/16"(2049)

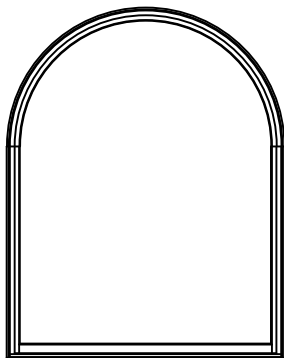

SCDHP6988

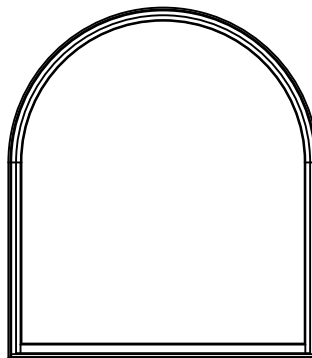

SCDHP7788

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


PICTURE RADIUS UNITS
ELEVATIONS

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


72 7/8"(1851)
75 7/8"(1927)
70 1/8"(1781)
69 3/8"(1762)
62 13/16"(1595)

80 7/8"(2054)
83 7/8"(2130)
78 1/8"(1984)
77 3/8"(1965)
70 13/16"(1799)

94 5/16"(2396)
85 13/16"(2134)
92 3/4"(2356)
92"(2337)
84 11/16"(2151)

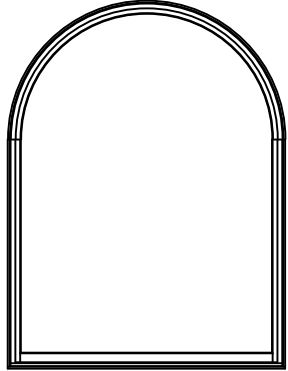

SCDHP6992

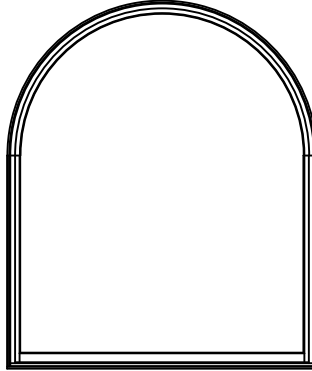

SCDHP7792

ELEVATION SYMBOL LEGEND:

VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

TRANSOM ELEVATIONS

M.O. BRICKMOULD	24 7/8"(632)	28 7/8"(733)	32 7/8"(835)	34 7/8"(886)	36 7/8"(937)	40 7/8"(1038)	44 7/8"(1140)
M.O. ADAMS/FLAT CASING	27 7/8"(708)	31 7/8"(810)	35 7/8"(911)	37 7/8"(962)	39 7/8"(1013)	43 7/8"(1114)	47 7/8"(1216)
ROUGH OPENING	22 1/8"(562)	26 1/8"(664)	30 1/8"(765)	32 1/8"(816)	34 1/8"(867)	38 1/8"(968)	42 1/8"(1070)
FRAME SIZE	21 3/8"(543)	25 3/8"(645)	29 3/8"(747)	31 3/8"(797)	33 3/8"(848)	37 3/8"(949)	41 3/8"(1051)
DAYLIGHT OPENING	14 13/16"(376)	18 13/16"(478)	22 13/16"(579)	24 13/16"(630)	26 13/16"(681)	30 13/16"(783)	34 13/16"(884)
17 5/16"(440)							
18 13/16"(478)	SCDT2115	SCDT2515	SCDT2915	SCDT3115	SCDT3315	SCDT3715	SCDT4115
15 3/4"(400)							
18 3/4"(476)	SCDT2118	SCDT2518	SCDT2918	SCDT3118	SCDT3318	SCDT3718	SCDT4118
18 1/4"(467)							
11 1/4"(286)	SCDT2124	SCDT2524	SCDT2924	SCDT3124	SCDT3324	SCDT3724	SCDT4124
26 5/16"(668)							
27 13/16"(706)	SCDT2124	SCDT2524	SCDT2924	SCDT3124	SCDT3324	SCDT3724	SCDT4124
24 3/4"(629)							
24"(610)							
17 1/4"(438)							

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

TRANSOM ELEVATIONS

M.O. BRICKMOULD 48 7/8"(1241)
M.O. ADAMS/FLAT CASING 51 7/8"(1318)
ROUGH OPENING 46 1/8"(1172)
FRAME SIZE 45 3/8"(1153)
DAYLIGHT OPENING 38 13/16"(986)

52 7/8"(1343)
55 7/8"(1419)
50 1/8"(1273)
49 3/8"(1254)
42 13/16"(1087)

56 7/8"(1445)
59 7/8"(1521)
54 1/8"(1375)
53 3/8"(1356)
46 13/16"(1189)

64 7/8"(1648)
67 7/8"(1724)
62 1/8"(1578)
61 3/8"(1559)
54 13/16"(1392)

17 5/16"(440)
18 13/16"(478)
15 3/4"(400)
15 1/8"(391)
8 1/4"(210)



SCDT4515



SCDT4915



SCDT5315



SCDT6115

20 5/16"(516)
21 13/16"(554)
18 3/4"(476)
18 1/8"(457)
11 1/4"(286)



SCDT4518



SCDT4918



SCDT5318



SCDT6118

26 5/16"(668)
27 13/16"(706)
24 3/4"(628)
24 1/8"(610)
17 1/4"(438)



SCDT4524



SCDT4924



SCDT5324



SCDT6124

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

TRANSOM ELEVATIONS

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

72 7/8"(1851)
75 7/8"(1927)
70 1/8"(1781)
69 3/8"(1762)
62 13/16"(1595)

80 7/8"(2054)
83 7/8"(2130)
78 1/8"(1984)
77 3/8"(1965)
70 13/16"(1799)



SCDT6915



SCDT6915



SCDT6918



SCDT6918



SCDT6924



SCDT6924

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

SINGLE SECTOR UNITS
ELEVATIONS

M.O. BRICKMOUND 24 7/8"(632)
M.O. ADAMS/FLAT CASING 27 7/8"(708)
ROUGH OPENING 22 1/8"(562)
FRAME SIZE 21 3/8"(543)
DAYLIGHT OPENING 14 13/16"(376)

28 7/8"(733)
31 7/8"(810)
26 1/8"(664)
25 3/8"(645)
18 13/16"(478)

32 7/8"(835)
35 7/8"(911)
30 1/8"(765)
29 3/8"(670)
22 13/16"(579)

34 7/8"(886)
37 7/8"(962)
32 1/8"(816)
31 3/8"(797)
24 13/16"(630)

36 7/8"(937)
39 7/8"(1013)
34 1/8"(867)
33 3/8"(848)
26 13/16"(681)

40 7/8"(1038)
43 7/8"(1114)
38 1/8"(968)
37 3/8"(949)
30 13/16"(783)

44 7/8"(1140)
47 7/8"(1216)
42 1/8"(1070)
41 3/8"(1051)
34 13/16"(884)

34 5/16"(872) 35 13/16"(910) 32 3/4"(832) 32"(813) 11 1/8"(283)[2]							
SCDS2132	SCDS2532	SCDS2932	SCDS3132	SCDS3332	SCDS3732	SCDS4132	
38 5/16"(973) 39 13/16"(1011) 36 3/4"(933) 36"(914) 13 1/8"(333)[2]							
SCDS2136	SCDS2536	SCDS2936	SCDS3136	SCDS3336	SCDS3736	SCDS4136	
42 5/16"(1075) 43 13/16"(1113) 40 3/4"(1035) 40"(1016) 15 1/8"(384)[2]							
SCDS2140	SCDS2540	SCDS2940	SCDS3140	SCDS3340	SCDS3740	SCDS4140	
46 5/16"(1176) 47 13/16"(1214) 44 3/4"(1137) 44"(1118) 17 1/8"(435)[2]							
SCDS2144	SCDS2544	SCDS2944	SCDS3144	SCDS3344	SCDS3744	SCDS4144	
50 5/16"(1278) 51 13/16"(1316) 48 3/4"(1238) 48"(1219) 19 1/8"(486)[2]							
SCDS2148	SCDS2548	SCDS2948	SCDS3148	SCDS3348	SCDS3748	SCDS4148	
54 5/16"(1380) 55 13/16"(1418) 52 3/4"(1340) 52"(1321) 21 1/8"(537)[2]							
SCDS2152	SCDS2552	SCDS2952	SCDS3152	SCDS3352	SCDS3752	SCDS4152	
58 5/16"(1481) 59 13/16"(1519) 56 3/4"(1441) 56"(1422) 23 1/8"(587)[2]							
SCDS2156	SCDS2556	SCDS2956	SCDS3156	SCDS3356	SCDS3756	SCDS4156	

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- # NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

SINGLE SECTOR UNITS
ELEVATIONS

M.O. BRICKMOUND 24 7/8"(632)
M.O. ADAMS/FLAT CASING 27 7/8"(708)
ROUGH OPENING 22 1/8"(562)
FRAME SIZE 21 3/8"(543)
DAYLIGHT OPENING 14 13/16"(376)

28 7/8"(733)
31 7/8"(810)
26 1/8"(664)
25 3/8"(645)
18 13/16"(478)

32 7/8"(835)
35 7/8"(911)
30 1/8"(765)
29 3/8"(760)
22 13/16"(579)

34 7/8"(886)
37 7/8"(962)
32 1/8"(816)
31 3/8"(797)
24 13/16"(630)

36 7/8"(937)
39 7/8"(1013)
34 1/8"(867)
33 3/8"(848)
26 13/16"(681)


40 7/8"(1038)
43 7/8"(1114)
38 1/8"(968)
37 3/8"(949)
30 13/16"(783)

44 7/8"(1140)
47 7/8"(1216)
42 1/8"(1070)
41 3/8"(1051)
34 13/16"(884)


62 5/16"(1583)
63 13/16"(1621)
60 3/4"(1543)
60"(1524)
25 1/8"(638)|[2]




SCDS2160




SCDS2560




SCDS2960




SCDS3160



SCDS3360




SCDS3760




SCDS4160


66 5/16"(1684)
67 13/16"(1722)
64 3/4"(1645)
64"(1626)
27 1/8"(689)|[2]




SCDS2164




SCDS2564




SCDS2964




SCDS3164



SCDS3364



SCDS3764




SCDS4164


70 5/16"(1786)
71 13/16"(1824)
68 3/4"(1746)
68"(1727)
29 1/8"(740)|[2]




SCDS2168




SCDS2568




SCDS2968




SCDS3168



SCDS3368




SCDS3768




SCDS4168


74 5/16"(1888)
75 13/16"(1926)
72 3/4"(1848)
72"(1829)
31 1/8"(791)|[2]




SCDS2172




SCDS2572




SCDS2972




SCDS3172



SCDS3372



SCDS3772



SCDS4172

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

SINGLE SECTOR UNITS
ELEVATIONS

M.O. BRICKMOULD 24 7/8"(632)
M.O. ADAMS/FLAT CASING 27 7/8"(708)
ROUGH OPENING 22 1/8"(562)
FRAME SIZE 21 3/8"(543)
DAYLIGHT OPENING 14 13/16"(376)

28 7/8"(733)
31 7/8"(810)
26 1/8"(664)
25 3/8"(645)
18 13/16"(478)

32 7/8"(835)
35 7/8"(911)
30 1/8"(765)
29 3/8"(670)
22 13/16"(579)


34 7/8"(886)
37 7/8"(962)
32 1/8"(816)
31 3/8"(797)
24 13/16"(630)

36 7/8"(937)
39 7/8"(1013)
34 1/8"(867)
33 3/8"(848)
26 13/16"(681)


40 7/8"(1038)
43 7/8"(1114)
38 1/8"(968)
37 3/8"(949)
30 13/16"(783)

44 7/8"(1140)
47 7/8"(1216)
42 1/8"(1070)
41 3/8"(1051)
34 13/16"(884)


78 5/16"(1989)
79 13/16"(2027)
76 3/4"(1949)
76"(1930)
33 1/8"(841)|2|




SCDS2176




SCDS2576




SCDS2976




SCDS3176



SCDS3376




SCDS3776




SCDS4176


82 5/16"(2091)
83 13/16"(2129)
80 3/4"(2051)
80"(2032)
35 1/8"(892)|2|




SCDS2180




SCDS2580




SCDS2980




SCDS3180



SCDS3380




SCDS3780




SCDS4180


90 5/16"(2294)
91 13/16"(2332)
88 3/4"(2254)
88"(2235)
39 7/8"(994)|2|




SCDS2188




SCDS2588




SCDS2988




SCDS3188



SCDS3388




SCDS3788




SCDS4188


94 5/16"(2396)
95 13/16"(2434)
92 3/4"(2356)
92"(2337)
41 1/8"(1045)|2|




SCDS2192




SCDS2592




SCDS2992




SCDS3192



SCDS3392



SCDS3792



SCDS4192

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

SINGLE SECTOR UNITS
ELEVATIONS

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)


M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)

34 5/16"(872)
35 13/16"(910)
32 3/4"(832)
32"(813)
11 1/8"(283)[2]




SCDS4532

38 5/16"(973)
39 13/16"(1011)
36 3/4"(933)
36"(914)
13 1/8"(335)[2]




SCDS4536

42 5/16"(1075)
43 13/16"(1113)
40 3/4"(1035)
40"(1016)
15 1/8"(394)[2]




SCDS4540

46 5/16"(1176)
47 13/16"(1214)
44 3/4"(1137)
44"(1118)
17 1/8"(439)[2]




SCDS4544

50 5/16"(1278)
51 13/16"(1316)
48 3/4"(1238)
48"(1219)
19 1/8"(488)[2]




SCDS4548

54 5/16"(1380)
55 13/16"(1418)
52 3/4"(1340)
52"(1321)
21 1/8"(537)[2]




SCDS4552

58 5/16"(1481)
59 13/16"(1519)
56 3/4"(1441)
56"(1422)
23 1/8"(587)[2]




SCDS4556

62 5/16"(1583)
63 13/16"(1621)
60 3/4"(1543)
60"(1524)
25 1/8"(638)[2]




SCDS4560

66 5/16"(1684)
67 13/16"(1722)
64 3/4"(1645)
64"(1626)
27 1/8"(689)[2]




SCDS4564

70 5/16"(1786)
71 13/16"(1824)
68 3/4"(1746)
68"(1727)
29 1/8"(740)[2]




SCDS4568

74 5/16"(1888)
75 13/16"(1926)
72 3/4"(1848)
72"(1829)
31 1/8"(791)[2]




SCDS4572

78 5/16"(1989)
79 13/16"(2027)
76 3/4"(1949)
76"(1930)
33 1/8"(841)[2]




SCDS4576

82 5/16"(2091)
83 13/16"(2129)
80 3/4"(2051)
80"(2032)
35 1/8"(892)[2]




SCDS4580

90 5/16"(2294)
91 13/16"(2332)
88 3/4"(2254)
88"(2235)
39 1/8"(994)[2]



SCDS4588

94 5/16"(2396)
95 13/16"(2434)
92 3/4"(2356)
92"(2337)
41 1/8"(1045)[2]



SCDS4592

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O. (Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

2 WIDE SECTOR UNITS
ELEVATIONS

MO BRICKMOLD	46 1/4"(1175)	54 1/4"(1378)	62 1/4"(1581)	66 1/4"(1683)	70 1/4"(1784)	78 1/4"(1988)	86 1/4"(2191)
MO FLAT CASING	49 1/4"(1251)	57 1/4"(1454)	65 1/4"(1657)	69 1/4"(1759)	73 1/4"(1861)	81 1/4"(2064)	89 1/4"(2267)
ROUGH OPENING	43 1/2"(1105)	51 1/2"(1308)	59 1/2"(1511)	63 1/2"(1613)	67 1/2"(1715)	75 1/2"(1918)	83 1/2"(2121)
FRAME SIZE	42 3/4"(1086)	50 3/4"(1289)	58 3/4"(1492)	62 3/4"(1594)	66 3/4"(1695)	74 3/4"(1899)	82 3/4"(2102)
DAYLIGHT OPENING	14 13/16"(376)[2]	18 13/16"(478)[2]	22 13/16"(579)[2]	24 13/16"(630)[2]	26 13/16"(681)[2]	30 13/16"(783)[2]	34 13/16"(884)[2]

34 5/16"(872)							
SCDS2132-2	SCDS2532-2	SCDS2932-2	SCDS3132-2	SCDS3332-2	SCDS3732-2	SCDS4132-2	
38 5/16"(973)							
SCDS2136-2	SCDS2536-2	SCDS2936-2	SCDS3136-2	SCDS3336-2	SCDS3736-2	SCDS4136-2	
42 5/16"(1075)							
SCDS2140-2	SCDS2540-2	SCDS2940-2	SCDS3140-2	SCDS3340-2	SCDS3740-2	SCDS4140-2	
46 5/16"(1176)							
SCDS2144-2	SCDS2544-2	SCDS2944-2	SCDS3144-2	SCDS3344-2	SCDS3744-2	SCDS4144-2	
50 5/16"(1278)							
SCDS2148-2	SCDS2548-2	SCDS2948-2	SCDS3148-2	SCDS3348-2	SCDS3748-2	SCDS4148-2	E1
54 5/16"(1380)							
SCDS2152-2	SCDS2552-2	SCDS2952-2	SCDS3152-2	SCDS3352-2	SCDS3752-2	SCDS4152-2	E
58 5/16"(1481)							
SCDS2156-2	SCDS2556-2	SCDS2956-2	SCDS3156-2	SCDS3356-2	SCDS3756-2	SCDS4156-2	E
62 5/16"(1583)							
SCDS2160-2	SCDS2560-2	SCDS2960-2	SCDS3160-2	SCDS3360-2	SCDS3760-2	SCDS4160-2	E
66 5/16"(1684)							
SCDS2164-2	SCDS2564-2	SCDS2964-2	SCDS3164-2	SCDS3364-2	SCDS3764-2	SCDS4164-2	E
70 5/16"(1786)							
SCDS2168-2	SCDS2568-2	SCDS2968-2	SCDS3168-2	SCDS3368-2	SCDS3768-2	SCDS4168-2	E


ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

Note: Elevations shown DO NOT have exterior trim... Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes, Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

2 WIDE SECTOR UNITS
ELEVATIONS

MO BRICKMOLD	46 1/4"(1175)	54 1/4"(1378)	62 1/4"(1581)	66 1/4"(1683)	70 1/4"(1784)	78 1/4"(1988)	86 1/4"(2191)
MO FLAT CASING	49 1/4"(1251)	57 1/4"(1454)	65 1/4"(1657)	69 1/4"(1759)	73 1/4"(1861)	81 1/4"(2064)	89 1/4"(2267)
ROUGH OPENING	43 1/2"(1105)	51 1/2"(1308)	59 1/2"(1511)	63 1/2"(1613)	67 1/2"(1715)	75 1/2"(1918)	83 1/2"(2121)
FRAME SIZE	42 3/4"(1086)	50 3/4"(1289)	58 3/4"(1492)	62 3/4"(1594)	66 3/4"(1696)	74 3/4"(1899)	82 3/4"(2102)
DAYLIGHT OPENING	14 13/16"(376)[2]	18 13/16"(478)[2]	22 13/16"(579)[2]	24 13/16"(630)[2]	26 13/16"(681)[2]	30 13/16"(783)[2]	34 13/16"(884)[2]

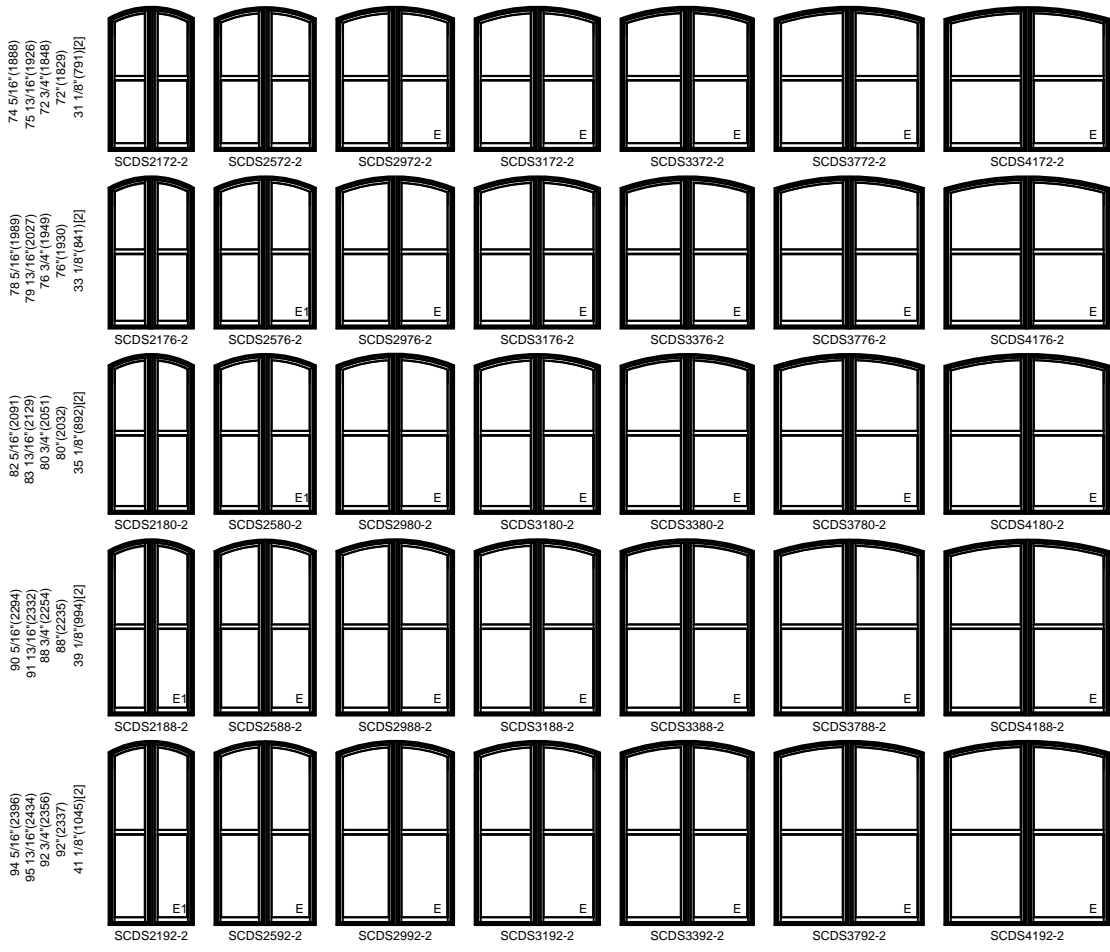

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E** BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
- E** BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O. (Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

2 WIDE SECTOR UNITS
ELEVATIONS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


94 1/4"(2394)
97 1/4"(2470)
91 1/2"(2324)
90 3/4"(2305)
38 13/16"(986)[2]

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

94 1/4"(2394)
97 1/4"(2470)
91 1/2"(2324)
90 3/4"(2305)
38 13/16"(986)[2]


34 5/16"(872) 35 13/16"(910) 32 3/4"(832) 32"(813)		SCDS4532-2
38 5/16"(973) 39 13/16"(1011) 36 3/4"(933) 36"(914)		SCDS4536-2
42 5/16"(1075) 43 13/16"(1113) 40 3/4"(1035) 40"(1016)		SCDS4540-2
46 5/16"(1176) 47 13/16"(1214) 44 3/4"(1137) 44"(1118)		SCDS4544-2
50 5/16"(1278) 51 13/16"(1316) 48 3/4"(1238) 48"(1219)		SCDS4548-2
54 5/16"(1380) 55 13/16"(1418) 52 3/4"(1340) 52"(1321)		SCDS4552-2
58 5/16"(1481) 59 13/16"(1519) 56 3/4"(1444) 56"(1425)		SCDS4556-2
62 5/16"(1583) 63 13/16"(1621) 60 3/4"(1543) 60"(1524)		SCDS4560-2
66 5/16"(1684) 67 13/16"(1722) 64 3/4"(1646) 64"(1626)		SCDS4564-2
70 5/16"(1786) 71 13/16"(1824) 68 3/4"(1746) 68"(1727)		SCDS4568-2

74 5/16"(1888)
75 13/16"(1926)
72 3/4"(1848)
72"(1829)




SCDS4572-2

78 5/16"(1989)
79 13/16"(2027)
76 3/4"(1949)
76"(1930)




SCDS4576-2

82 5/16"(2091)
83 13/16"(2129)
80 3/4"(2051)
80"(2032)




SCDS4580-2

86 5/16"(2193)
87 13/16"(2231)
84 3/4"(2153)
84"(2134)




SCDS4584-2

90 5/16"(2295)
91 13/16"(2333)
88 3/4"(2255)
88"(2236)



SCDS4588-2

94 5/16"(2396)
95 13/16"(2434)
92 3/4"(2356)
92"(2337)



SCDS4592-2

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

3 WIDE SECTOR UNITS
ELEVATIONS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

67 5/8"(1718)
70 5/8"(1794)
64 7/8"(1648)
64 1/8"(1629)
14 13/16"(376)[3]

79 5/8"(2022)
82 5/8"(2099)
76 7/8"(1953)
76 1/8"(1934)
18 13/16"(478)[3]

91 5/8"(2328)
94 5/8"(2403)
88 7/8"(2257)
88 1/8"(1492)
22 13/16"(579)[3]

97 5/8"(2480)
100 5/8"(2556)
94 7/8"(2410)
94 1/8"(1594)
24 13/16"(630)[3]

103 5/8"(2632)
106 5/8"(2708)
100 7/8"(2562)
100 1/8"(2543)
26 13/16"(681)[3]

115 5/8"(2937)
118 5/8"(3013)
112 7/8"(2867)
112 1/8"(1899)
30 13/16"(783)[3]

34 5/16"(872)
35 13/16"(910)
32 3/4"(832)
32"(813)
38 5/16"(973)
39 13/16"(1011)
36 3/4"(933)
36"(914)
42 5/16"(1075)
43 13/16"(1113)
40 3/4"(1035)
40"(1016)
46 5/16"(1176)
47 13/16"(1214)
44 3/4"(1137)
44"(1118)
50 5/16"(1279)
51 13/16"(1316)
48 3/4"(1238)
48"(1219)
54 5/16"(1380)
55 13/16"(1418)
52 3/4"(1340)
52"(1321)
58 5/16"(1481)
59 13/16"(1519)
56 3/4"(1441)
56"(1422)
62 5/16"(1583)
63 13/16"(1621)
60 3/4"(1543)
60"(1524)
66 5/16"(1684)
67 13/16"(1722)
64 3/4"(1645)
64"(1626)
70 5/16"(1786)
71 13/16"(1824)
68 3/4"(1746)
68"(1727)
21 1/8"(537)[2]
23 1/8"(597)[2]
25 1/8"(639)[2]
27 1/8"(699)[2]
29 1/8"(740)[2]



SCDS2132-3



SCDS2532-3



SCDS2932-3



SCDS3132-3



SCDS3332-3



SCDS3732-3



SCDS2136-3



SCDS2536-3



SCDS2936-3



SCDS3136-3



SCDS3336-3



SCDS3736-3



SCDS2140-3



SCDS2540-3



SCDS2940-3



SCDS3140-3



SCDS3340-3



SCDS3740-3



SCDS2144-3



SCDS2544-3



SCDS2944-3



SCDS3144-3



SCDS3344-3



SCDS3744-3



SCDS2148-3



SCDS2548-3



SCDS2948-3



SCDS3148-3



SCDS3348-3



SCDS3748-3



SCDS2152-3



SCDS2552-3



SCDS2952-3



SCDS3152-3



SCDS3352-3



SCDS3752-3



SCDS2156-3



SCDS2556-3



SCDS2956-3



SCDS3156-3



SCDS3356-3



SCDS3756-3



SCDS2160-3



SCDS2560-3



SCDS2960-3



SCDS3160-3



SCDS3360-3



SCDS3760-3



SCDS2164-3



SCDS2564-3



SCDS2964-3



SCDS3164-3



SCDS3364-3



SCDS3764-3



SCDS2168-3



SCDS2568-3



SCDS2968-3



SCDS3168-3



SCDS3368-3



SCDS3768-3

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E I BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

3 WIDE SECTOR UNITS
ELEVATIONS

MO BRICKMOLD	67 5/8"(1718)	79 5/8"(2022)	91 5/8"(2328)	97 5/8"(2480)	103 5/8"(2632)	115 5/8"(2937)
MO FLAT CASING	70 5/8"(1794)	82 5/8"(2099)	94 5/8"(2403)	100 5/8"(2556)	106 5/8"(2708)	118 5/8"(3013)
ROUGH OPENING	64 7/8"(1648)	76 7/8"(1953)	88 7/8"(2257)	94 7/8"(2410)	100 7/8"(2562)	112 7/8"(2867)
FRAME SIZE	64 1/8"(1629)	76 1/8"(1934)	88 1/8"(2142)	94 1/8"(2194)	100 1/8"(2543)	112 1/8"(1899)
DAYLIGHT OPENING	14 13/16"(376)[3]	18 13/16"(478)[3]	22 13/16"(579)[3]	24 13/16"(630)[3]	26 13/16"(681)[3]	30 13/16"(783)[3]

74 5/16"(1888) 75 13/16"(1926) 72 3/4"(1848) 72"(1828) 31 1/8"(791)[2]						
SCDS2172-3	SCDS2572-3	SCDS2972-3	SCDS3172-3	SCDS3372-3	SCDS3772-3	
78 5/16"(1989) 79 13/16"(2027) 76 3/4"(1949) 76"(1930) 33 1/8"(841)[2]						
SCDS2176-3	SCDS2576-3	SCDS2976-3	SCDS3176-3	SCDS3376-3	SCDS3776-3	
82 5/16"(2091) 83 13/16"(2129) 80 3/4"(2051) 80"(2032) 35 1/8"(892)[2]						
SCDS2180-3	SCDS2580-3	SCDS2980-3	SCDS3180-3	SCDS3380-3	SCDS3780-3	
90 5/16"(2294) 91 13/16"(2332) 88 3/4"(2254) 88"(2235) 39 1/8"(994)[2]						
SCDS2188-3	SCDS2588-3	SCDS2988-3	SCDS3188-3	SCDS3388-3	SCDS3788-3	
94 5/16"(2396) 95 13/16"(2434) 92 3/4"(2356) 92"(2337) 41 1/8"(1045)[2]						
SCDS2192-3	SCDS2592-3	SCDS2992-3	SCDS3192-3	SCDS3392-3	SCDS3792-3	

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
 E 1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

3 WIDE SECTOR UNITS
ELEVATIONS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

127 5/8"(3242)
130 5/8"(3318)
124 7/8"(3172)
124 1/8"(3153)
34 13/16"(884)[3]

139 5/8"(3546)
142 5/8"(3623)
136 7/8"(3477)
136 1/8"(3458)
38 13/16"(986)[3]

34 5/16"(872) 35 13/16"(910) 32 3/4"(832) 32"(813)		
SCDS4132-3	SCDS4532-3	
38 5/16"(973) 39 13/16"(1011) 36 3/4"(933) 36"(914)		
SCDS4136-3	SCDS4536-3	
42 5/16"(1075) 43 13/16"(1113) 40 3/4"(1035) 40"(1016)		
SCDS4140-3	SCDS4540-3	
46 5/16"(1176) 47 13/16"(1214) 44 3/4"(1137) 44"(1118)		
SCDS4144-3	SCDS4544-3	
50 5/16"(1278) 51 13/16"(1316) 48 3/4"(1238) 48"(1219)		
SCDS4148-3	SCDS4548-3	
54 5/16"(1380) 55 13/16"(1418) 52 3/4"(1340) 52"(1321)		
SCDS4152-3	SCDS4552-3	
58 5/16"(1481) 59 13/16"(1519) 56 3/4"(1441) 56"(1422)		
SCDS4156-3	SCDS4556-3	
62 5/16"(1583) 63 13/16"(1621) 60 3/4"(1543) 60"(1524)		
SCDS4160-3	SCDS4560-3	
66 5/16"(1684) 67 13/16"(1722) 64 3/4"(1645) 64"(1626)		
SCDS4164-3	SCDS4564-3	
70 5/16"(1786) 71 13/16"(1824) 68 3/4"(1746) 68"(1727)		
SCDS4168-3	SCDS4568-3	

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

3 WIDE SECTOR UNITS
ELEVATIONS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING



127 5/8"(3242)
130 5/8"(3318)
124 7/8"(3172)
124 1/8"(3153)
34 13/16"(884)[3]

139 5/8"(3546)
142 5/8"(3623)
136 7/8"(3477)
136 1/8"(3458)
38 13/16"(986)[3]



74 5/16"(1888)
75 13/16"(1926)
72 3/4"(1848)
72"(1829)
31 1/8"(791)[2]




78 5/16"(1989)
79 13/16"(2027)
76 3/4"(1949)
76"(1930)
33 1/8"(841)[2]




82 5/16"(2081)
83 13/16"(2129)
80 3/4"(2051)
80"(2032)
35 1/8"(892)[2]



90 5/16"(2294)
91 13/16"(2332)
88 3/4"(2254)
88"(2235)
39 1/8"(994)[2]



94 5/16"(2396)
95 13/16"(2434)
92 3/4"(2356)
92"(2337)
41 1/8"(1045)[2]



ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E I BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

SINGLE RADIUS UNITS
ELEVATIONS

M.O. BRICKMOULD 24 7/8"(632)
M.O. ADAMS/FLAT CASING 27 7/8"(708)
ROUGH OPENING 22 1/8"(562)
FRAME SIZE 21 3/8"(543)
DAYLIGHT OPENING 14 13/16"(376)

28 7/8"(733)
31 7/8"(810)
26 1/8"(664)
25 3/8"(645)
18 13/16"(478)

32 7/8"(835)
35 7/8"(911)
30 1/8"(765)
29 3/8"(670)
22 13/16"(579)

34 7/8"(886)
37 7/8"(962)
32 1/8"(816)
31 3/8"(797)
24 13/16"(630)

36 7/8"(937)
39 7/8"(1013)
34 1/8"(867)
33 3/8"(848)
26 13/16"(681)

40 7/8"(1038)
43 7/8"(1114)
38 1/8"(968)
37 3/8"(949)
30 13/16"(783)

44 7/8"(1140)
47 7/8"(1216)
42 1/8"(1070)
41 3/8"(1051)
34 13/16"(884)

54 5/16"(1380) 55 13/16"(1418) 52 3/4"(1340) 52"(1321) 21 1/8"(537) 2]							
58 5/16"(1481) 59 13/16"(1519) 56 3/4"(1441) 56"(1422) 23 1/8"(587) 2]							
62 5/16"(1583) 63 13/16"(1621) 60 3/4"(1543) 60"(1524) 25 1/8"(638) 2]							
66 5/16"(1684) 67 13/16"(1722) 64 3/4"(1645) 64"(1626) 27 1/8"(689) 2]							
70 5/16"(1786) 71 13/16"(1824) 68 3/4"(1746) 68"(1727) 29 7/8"(740) 2]							

ELEVATION SYMBOL LEGEND:

VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

SINGLE RADIUS UNITS
ELEVATIONS

M.O. BRICKMOULD 24 7/8"(632)
M.O. ADAMS/FLAT CASING 27 7/8"(708)
ROUGH OPENING 22 1/8"(562)
FRAME SIZE 21 3/8"(543)
DAYLIGHT OPENING 14 13/16"(376)

28 7/8"(733)
31 7/8"(810)
26 1/8"(664)
25 3/8"(645)
18 13/16"(478)

32 7/8"(835)
35 7/8"(911)
30 1/8"(765)
29 3/8"(670)
22 13/16"(579)

34 7/8"(886)
37 7/8"(962)
32 1/8"(816)
31 3/8"(797)
24 13/16"(630)

36 7/8"(937)
39 7/8"(1013)
34 1/8"(867)
33 3/8"(848)
26 13/16"(681)


40 7/8"(1038)
43 7/8"(1114)
38 1/8"(968)
37 3/8"(949)
30 13/16"(783)

44 7/8"(1140)
47 7/8"(1216)
42 1/8"(1070)
41 3/8"(1051)
34 13/16"(884)


74 5/16"(1888)
75 13/16"(1926)
72 3/4"(1848)
72"(1829)
31 1/8"(791)[2]




SCDHP2172




SCDHP2572




SCDHP2972




SCDHP3172



SCDHP3372




SCDHP3772




SCDHP4172


78 5/16"(1989)
79 13/16"(2027)
76 3/4"(1949)
76"(1930)
33 1/8"(841)[2]




SCDHP2176




SCDHP2576




SCDHP2976




SCDHP3176



SCDHP3376



SCDHP3776




SCDHP4176


82 5/16"(2091)
83 13/16"(2129)
80 3/4"(2051)
80"(2032)
35 1/8"(892)[2]




SCDHP2180




SCDHP2580




SCDHP2980




SCDHP3180



SCDHP3380




SCDHP3780




SCDHP4180


90 5/16"(2294)
91 13/16"(2332)
88 3/4"(2254)
88"(2235)
39 1/8"(994)[2]




SCDHP2188




SCDHP2588




SCDHP2988




SCDHP3188



SCDHP3388



SCDHP3788



SCDHP4188

ELEVATION SYMBOL LEGEND:


- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


SINGLE RADIUS UNITS
ELEVATIONS

M.O. BRICKMOULD	24 7/8"(632)	28 7/8"(733)	32 7/8"(835)	34 7/8"(886)	36 7/8"(937)	40 7/8"(1038)	44 7/8"(1140)
M.O. ADAMS/FLAT CASING	27 7/8"(708)	31 7/8"(810)	35 7/8"(911)	37 7/8"(962)	39 7/8"(1013)	43 7/8"(1114)	47 7/8"(1216)
ROUGH OPENING	22 1/8"(562)	26 1/8"(664)	30 1/8"(765)	32 1/8"(816)	34 1/8"(867)	38 1/8"(968)	42 1/8"(1070)
FRAME SIZE	21 3/8"(543)	25 3/8"(645)	29 3/8"(746)	31 3/8"(797)	33 3/8"(848)	37 3/8"(949)	41 3/8"(1051)
DAYLIGHT OPENING	14 13/16"(376)	18 13/16"(478)	22 13/16"(579)	24 13/16"(630)	26 13/16"(681)	30 13/16"(783)	34 13/16"(884)


94 5/16"(2396)
88 1/16"(2249)
82 3/16"(2106)
76 7/16"(1963)
41 1/8"(1045)[2]




SCDHP2192




SCDHP2592




SCDHP2992




SCDHP3192



SCDHP3392



SCDHP3792



SCDHP4192

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

SINGLE RADIUS UNITS
ELEVATIONS

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)




SCDHP4552




SCDHP4572

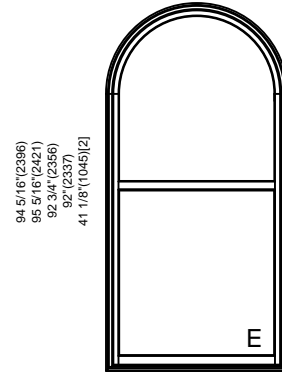


SCDHP4592




SCDHP4556




SCDHP4576




SCDHP4560




SCDHP4580



SCDHP4564

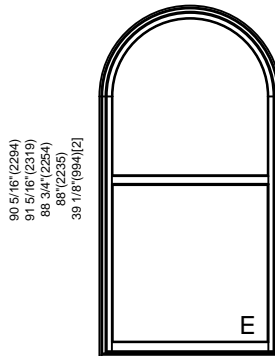

SCDHP4588



SCDHP4568

ELEVATION SYMBOL LEGEND:

VALUES IN () ARE IN MILLIMETER CONVERSIONS

E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS

NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O. (Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.