
TABLE OF CONTENTS

Single Units	2-14
2 Wide Units	2-17
3 Wide Units	2-19
4 Wide Units	2-23
5 Wide Units	2-27
Picture Units	2-31
Sector Top Units	2-38
Sector Top 2 Wide Units	2-41
Sector Top 3 Wide Units	2-43
Picture with 18" Flanker	2-47
Picture with 20" Flanker	2-48
Picture with 24" Flanker	2-49
Picture with 28" Flanker	2-50
Picture with 30" Flanker	2-51

CASEMENT ELEVATIONS

M.O. BRICKMOULD	21 1/2"(546)	23 1/2"(597)	27 1/2"(699)	31 1/2"(800)	33 1/2"(851)	35 1/2"(902)	39 1/2"(1003)
M.O. ADAMS/FLAT CASING	24 1/2"(622)	26 1/2"(673)	30 1/2"(775)	34 1/2"(876)	36 1/2"(927)	38 1/2"(978)	42 1/2"(1080)
ROUGH OPENING	18 3/4"(476)	20 3/4"(527)	24 3/4"(629)	28 3/4"(730)	30 3/4"(781)	32 3/4"(832)	36 3/4"(933)
FRAME SIZE	18"(457)	20"(508)	24"(610)	28"(711)	30"(762)	32"(813)	36"(914)
DAYLIGHT OPENING	12 1/8"(308)	14 1/8"(359)	18 1/8"(460)	22 1/8"(562)	24 1/8"(613)	26 1/8"(664)	30 1/8"(765)
14 15/16"(379) 16 7/16"(418) 12 3/4"(354) 12 (305) 6 1/8"(156)							
20 15/16"(522) 22 7/16"(570) 18 7/8"(476) 18 1/8"(460) 12 1/8"(308)							
22 15/16"(583) 24 7/16"(621) 20 3/4"(527) 20 (508) 14 1/8"(359)							
26 15/16"(684) 28 7/16"(722) 24 3/4"(629) 24 (610) 18 1/8"(460)							
30 15/16"(786) 32 7/16"(824) 28 3/4"(730) 28 (711) 22 1/8"(562)							
32 15/16"(837) 34 7/16"(875) 30 3/4"(781) 30 (762) 24 1/8"(613)							
38 15/16"(989) 40 7/16"(1027) 36 3/4"(933) 36 (914) 30 1/8"(765)							
44 15/16"(1141) 46 7/16"(1180) 42 3/4"(1086) 42 (1067) 36 1/8"(916)							

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
 ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
 S STATIONARY UNITS ONLY

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

CASEMENT ELEVATIONS

M.O. BRICKMOULD	21 1/2"(546)	23 1/2"(597)	27 1/2"(699)	31 1/2"(800)	33 1/2"(851)	35 1/2"(902)	39 1/2"(1003)		
M.O. ADAMS/FLAT CASING	24 1/2"(622)	26 1/2"(673)	30 1/2"(775)	34 1/2"(876)	36 1/2"(927)	38 1/2"(978)	42 1/2"(1080)		
ROUGH OPENING	18 3/4"(476)	20 3/4"(527)	24 3/4"(629)	28 3/4"(730)	30 3/4"(781)	32 3/4"(832)	36 3/4"(933)		
FRAME SIZE	18"(457)	20"(508)	24"(610)	28"(711)	30"(762)	32"(813)	36"(914)		
DAYLIGHT OPENING	12 1/8"(308)	14 1/8"(359)	18 1/8"(460)	22 1/8"(562)	24 1/8"(613)	26 1/8"(664)	30 1/8"(765)		
50 15/16"(1294) 52 7/16"(1332) 48 3/4"(1236) 42 1/8"(1070)									
	SWC1848 SWPOC1848	SWC2048 SWPOC2048	SWC2448 SWPOC2448	SWC2848 SWPOC2848	SWC3048 SWPOC3048	SWC3248 SWPOC3248	SWC3648 SWPOC3648		
	56 15/16"(1446) 58 7/16"(1484) 54 3/4"(1391) 48 1/8"(1222)								
		SWC1854 SWPOC1854	SWC2054 SWPOC2054	SWC2454 SWPOC2454	SWC2854 SWPOC2854	SWC3054 SWPOC3054	SWC3254 SWPOC3254	SWC3654 SWPOC3654	
		62 15/16"(1589) 64 7/16"(1627) 60 3/4"(1534) 54 1/8"(1375)							
			SWC1860 SWPOC1860	SWC2060 SWPOC2060	SWC2460 SWPOC2460	SWC2860 SWPOC2860	SWC3060 SWPOC3060	SWC3260 SWPOC3260	SWC3660 SWPOC3660
			68 15/16"(1731) 70 7/16"(1769) 66 3/4"(1676) 60 1/8"(1527)						
SWC1866 SWPOC1866				SWC2066 SWPOC2066	SWC2466 SWPOC2466	SWC2866 SWPOC2866	SWC3066 SWPOC3066	SWC3266 SWPOC3266	SWC3666 SWPOC3666
74 15/16"(1903) 76 7/16"(1941) 72 3/4"(1848) 72 1/8"(1829) 66 1/8"(1680)									
	SWC1872 SWPOC1872			SWC2072 SWPOC2072	SWC2472 SWPOC2472	SWC2872 SWPOC2872	SWC3072 SWPOC3072	SWC3272 SWPOC3272	SWC3672 SWPOC3672


ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
- S STATIONARY UNITS ONLY

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

CASEMENT ELEVATIONS

M.O. BRICKMOULD	21 1/2"(546)	23 1/2"(597)	27 1/2"(699)	31 1/2"(800)	33 1/2"(851)	35 1/2"(902)	39 1/2"(1003)
M.O. ADAMS/FLAT CASING	24 1/2"(622)	26 1/2"(673)	30 1/2"(775)	34 1/2"(876)	36 1/2"(927)	38 1/2"(978)	42 1/2"(1080)
ROUGH OPENING	18 3/4"(476)	20 3/4"(527)	24 3/4"(629)	28 3/4"(730)	30 3/4"(781)	32 3/4"(832)	36 3/4"(933)
FRAME SIZE	18"(457)	20"(508)	24"(610)	28"(711)	30"(762)	32"(813)	36"(914)
DAYLIGHT OPENING	12 1/8"(308)	14 1/8"(359)	18 1/8"(460)	22 1/8"(562)	24 1/8"(613)	26 1/8"(664)	30 1/8"(765)

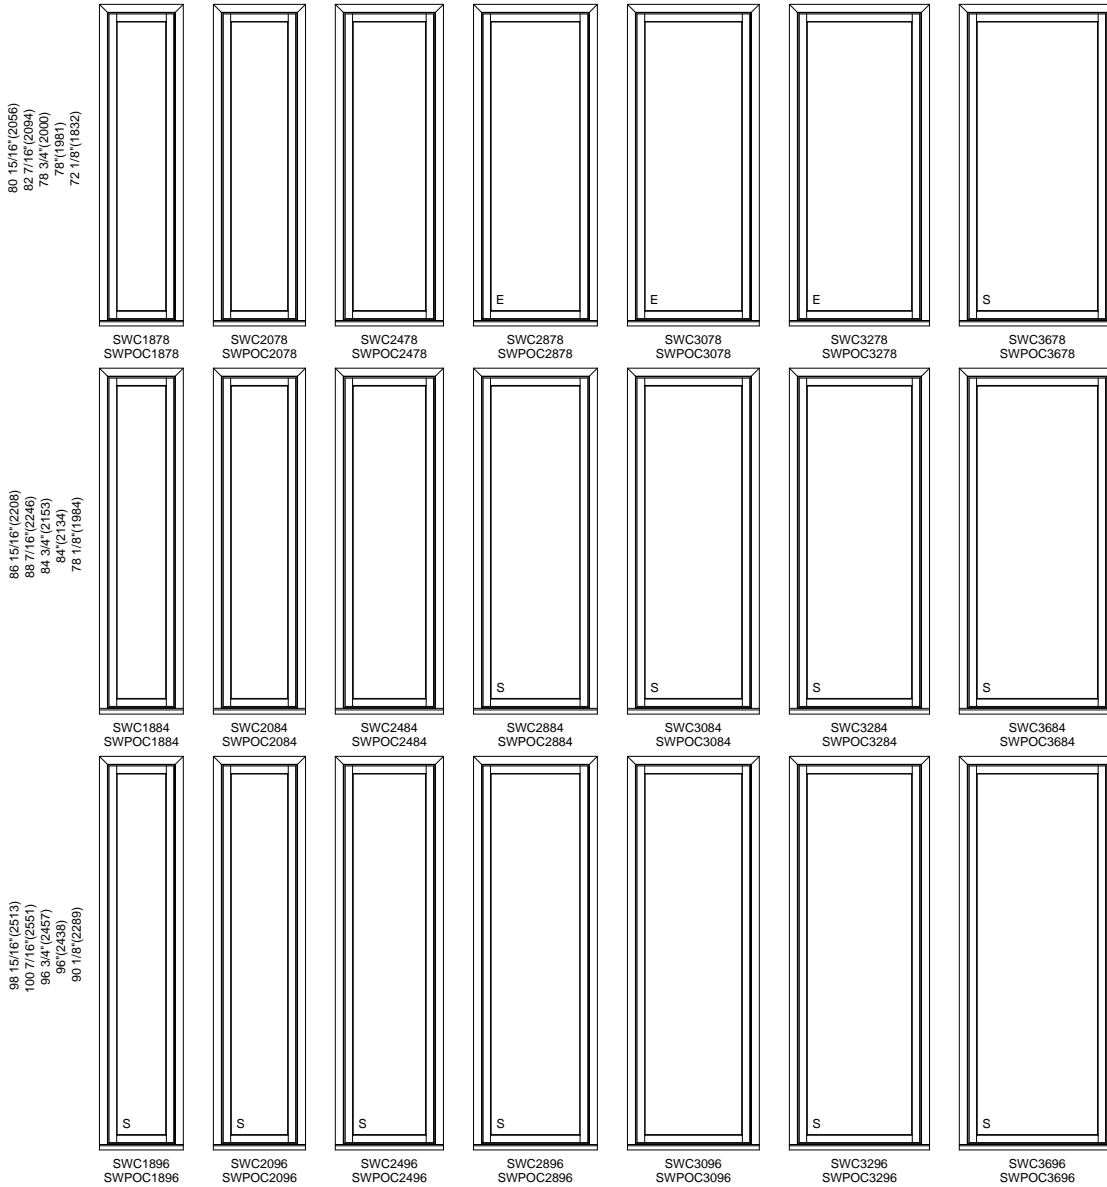

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
- S STATIONARY UNITS ONLY

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

2 WIDE ELEVATIONS

	39 1/2"(1003)	43 1/2"(1105)	51 1/2"(1308)	59 1/2"(1511)	63 1/2"(1613)	67 1/2"(1715)	75 1/2"(1918)
MO BRICKMOLD	42 1/2"(1080)	46 1/2"(1181)	54 1/2"(1384)	62 1/2"(1588)	66 1/2"(1689)	70 1/2"(1791)	78 1/2"(1994)
MO FLAT CASING	36 3/4"(933)	40 3/4"(1035)	48 3/4"(1238)	56 3/4"(1441)	60 3/4"(1543)	64 3/4"(1645)	72 3/4"(1848)
ROUGH OPENING	36"(914)	40"(1016)	48"(1219)	56"(1422)	60"(1524)	64"(1626)	72"(1829)
FRAME SIZE	12 1/8"(308)[2]	14 1/8"(359)[2]	18 1/8"(460)[2]	22 1/8"(562)[2]	24 1/8"(613)[2]	26 1/8"(664)[2]	30 1/8"(765)[2]
DAYLIGHT OPENING	14 15/16"(379)	16 7/16"(418)	18 3/4"(476)	20 15/16"(532)	22 7/16"(570)	24 3/4"(628)	28 1/8"(716)
	12 3/4"(324)	12"(305)	6 1/8"(156)				
	20 15/16"(532)	22 7/16"(570)	24 3/4"(628)	26 1/8"(664)	28 1/8"(716)	30 1/8"(765)	32 7/16"(824)
	24 3/4"(628)	20 3/4"(527)	20 3/4"(527)	24 3/4"(628)	28 1/8"(716)	28 1/8"(716)	30 1/8"(765)
	18 1/8"(460)	14 1/8"(359)	12 1/8"(308)				
	26 15/16"(684)	28 7/16"(722)	30 3/4"(781)	32 15/16"(837)	34 7/16"(875)	36 3/4"(933)	40 7/16"(1027)
	24 3/4"(628)	24 3/4"(628)	28 1/8"(716)	30 1/8"(765)	30 1/8"(765)	30 1/8"(765)	30 1/8"(765)
	18 1/8"(460)	14 1/8"(359)	12 1/8"(308)				
	32 15/16"(837)	34 7/16"(875)	36 3/4"(933)	38 15/16"(989)	40 7/16"(1027)	42 1/8"(1067)	44 15/16"(1141)
	30 1/8"(765)	30 1/8"(765)	30 1/8"(765)	30 1/8"(765)	30 1/8"(765)	30 1/8"(765)	30 1/8"(765)
	24 1/8"(613)	24 1/8"(613)	24 1/8"(613)	24 1/8"(613)	24 1/8"(613)	24 1/8"(613)	24 1/8"(613)
	38 15/16"(989)	40 7/16"(1027)	42 1/8"(1067)	44 15/16"(1141)	46 7/16"(1180)	48 3/4"(1238)	50 15/16"(1294)
	30 1/8"(765)	30 1/8"(765)	30 1/8"(765)	30 1/8"(765)	30 1/8"(765)	30 1/8"(765)	30 1/8"(765)
	24 1/8"(613)	24 1/8"(613)	24 1/8"(613)	24 1/8"(613)	24 1/8"(613)	24 1/8"(613)	24 1/8"(613)
	44 15/16"(1141)	46 7/16"(1180)	48 3/4"(1238)	50 15/16"(1294)	52 7/16"(1332)	54 3/4"(1391)	56 15/16"(1446)
	30 1/8"(765)	30 1/8"(765)	30 1/8"(765)	30 1/8"(765)	30 1/8"(765)	30 1/8"(765)	30 1/8"(765)
	24 1/8"(613)	24 1/8"(613)	24 1/8"(613)	24 1/8"(613)	24 1/8"(613)	24 1/8"(613)	24 1/8"(613)
	50 15/16"(1294)	52 7/16"(1332)	54 3/4"(1391)	56 15/16"(1446)	58 7/16"(1484)	60 3/4"(1543)	62 15/16"(1599)
	30 1/8"(765)	30 1/8"(765)	30 1/8"(765)	30 1/8"(765)	30 1/8"(765)	30 1/8"(765)	30 1/8"(765)
	24 1/8"(613)	24 1/8"(613)	24 1/8"(613)	24 1/8"(613)	24 1/8"(613)	24 1/8"(613)	24 1/8"(613)
	56 15/16"(1446)	58 7/16"(1484)	60 3/4"(1543)	62 15/16"(1599)	64 7/16"(1637)	66 3/4"(1695)	68 15/16"(1753)
	30 1/8"(765)	30 1/8"(765)	30 1/8"(765)	30 1/8"(765)	30 1/8"(765)	30 1/8"(765)	30 1/8"(765)
	24 1/8"(613)	24 1/8"(613)	24 1/8"(613)	24 1/8"(613)	24 1/8"(613)	24 1/8"(613)	24 1/8"(613)
	62 15/16"(1599)	64 7/16"(1637)	66 3/4"(1695)	68 15/16"(1753)	70 1/2"(1791)	72 3/4"(1848)	75 1/2"(1918)
	30 1/8"(765)	30 1/8"(765)	30 1/8"(765)	30 1/8"(765)	30 1/8"(765)	30 1/8"(765)	30 1/8"(765)
	24 1/8"(613)	24 1/8"(613)	24 1/8"(613)	24 1/8"(613)	24 1/8"(613)	24 1/8"(613)	24 1/8"(613)

ELEVATION SYMBOL LEGEND:
M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

2 WIDE ELEVATIONS

MO BRICKMOLD	39 1/2"(1003)	43 1/2"(1105)	51 1/2"(1308)	59 1/2"(1511)	63 1/2"(1613)	67 1/2"(1715)	75 1/2"(1918)
MO FLAT CASING	42 1/2"(1080)	46 1/2"(1181)	54 1/2"(1384)	62 1/2"(1588)	66 1/2"(1689)	70 1/2"(1791)	78 1/2"(1994)
ROUGH OPENING	36 3/4"(933)	40 3/4"(1035)	48 3/4"(1238)	56 3/4"(1441)	60 3/4"(1543)	64 3/4"(1645)	72 3/4"(1848)
FRAME SIZE	36"(914)	40"(1016)	48"(1219)	56"(1422)	60"(1524)	64"(1626)	72"(1829)
DAYLIGHT OPENING	12 1/8"(308)[2]	14 1/8"(359)[2]	18 1/8"(460)[2]	22 1/8"(562)[2]	24 1/8"(613)[2]	26 1/8"(664)[2]	30 1/8"(765)[2]
























































68 15/16"(1751) 70 7/16"(1789) 66 3/4"(1695) 60 1/8"(1527)							
	SWC1866-2	SWC2066-2	SWC2466-2	SWC2866-2	SWC3066-2	SWC3266-2	SWC3666-2
	SWPOC1866-2	SWPOC2066-2	SWPOC2466-2	SWPOC2866-2	SWPOC3066-2	SWPOC3266-2	SWPOC3666-2
				E	E	E	E
74 15/16"(1903) 76 7/16"(1942) 72 3/4"(1848) 72"(1829) 66 1/8"(1680)							
	SWC1872-2	SWC2072-2	SWC2472-2	SWC2872-2	SWC3072-2	SWC3272-2	SWC3672-2
	SWPOC1872-2	SWPOC2072-2	SWPOC2472-2	SWPOC2872-2	SWPOC3072-2	SWPOC3272-2	SWPOC3672-2
				E	E	E	E
80 15/16"(2056) 82 7/16"(2094) 78 3/4"(2000) 78"(1981) 72 1/8"(1832)							
	SWC1878-2	SWC2078-2	SWC2478-2	SWC2878-2	SWC3078-2	SWC3278-2	SWC3678-2
	SWPOC1878-2	SWPOC2078-2	SWPOC2478-2	SWPOC2878-2	SWPOC3078-2	SWPOC3278-2	SWPOC3678-2
				E	E	E	E

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

3 WIDE ELEVATIONS

MO BRICKMOLD	57 1/2"(1461)	63 1/2"(1613)	75 1/2"(1918)	87 1/2"(2223)	93 1/2"(2375)
MO FLAT CASING	60 1/2"(1537)	66 1/2"(1689)	78 1/2"(1994)	90 1/2"(2299)	96 1/2"(2451)
ROUGH OPENING	54 3/4"(1391)	60 3/4"(1543)	72 3/4"(1838)	84 3/4"(2153)	90 3/4"(2305)
FRAME SIZE	54"(1372)	60"(1524)	72"(1819)	84"(2134)	90"(2286)
DAYLIGHT OPENING	12 1/8"(308)[3]	14 1/8"(359)[3]	18 1/8"(460)[3]	22 1/8"(562)[3]	24 1/8"(613)[3]
14 15/16"(379)					
16 7/16"(418)					
18 3/4"(476)					
12"(305)					
18 1/8"(308)					
22 1/8"(562)					
24 1/8"(613)					
30 15/16"(786)					
28 7/16"(722)					
24 3/4"(629)					
20 3/4"(527)					
20 5/8"(508)					
14 1/8"(359)					

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

3 WIDE ELEVATIONS

MO BRICKMOLD	57 1/2"(1461)	63 1/2"(1613)	75 1/2"(1918)	87 1/2"(2223)	93 1/2"(2375)
MO FLAT CASING	60 1/2"(1537)	66 1/2"(1689)	78 1/2"(1994)	90 1/2"(2299)	96 1/2"(2451)
ROUGH OPENING	54 3/4"(1391)	60 3/4"(1543)	72 3/4"(1838)	84 3/4"(2153)	90 3/4"(2305)
FRAME SIZE	54"(1372)	60"(1524)	72"(1819)	84"(2134)	90"(2286)
DAYLIGHT OPENING	12 1/8"(308)[3]	14 1/8"(359)[3]	18 1/8"(460)[3]	22 1/8"(562)[3]	24 1/8"(613)[3]

68 15/16"(1751) 70 7/16"(1789) 66 3/4"(1695) 68"(1676) 60 1/8"(1527)					
	SWC1866-3 SWPOC1866-3	SWC2066-3 SWPOC2066-3	SWC2466-3 SWPOC2466-3	SWC2866-3 SWPOC2866-3	SWC3066-3 SWPOC3066-3
74 15/16"(1903) 76 7/16"(1942) 72 3/4"(1848) 72"(1829) 66 1/8"(1680)					
	SWC1872-3 SWPOC1872-3	SWC2072-3 SWPOC2072-3	SWC2472-3 SWPOC2472-3	SWC2872-3 SWPOC2872-3	SWC3072-3 SWPOC3072-3
80 15/16"(2056) 82 7/16"(2094) 78 3/4"(2000) 78"(1981) 72 1/8"(1832)					
	SWC1878-3 SWPOC1878-3	SWC2078-3 SWPOC2078-3	SWC2478-3 SWPOC2478-3	SWC2878-3 SWPOC2878-3	SWC3078-3 SWPOC3078-3

ELEVATION SYMBOL LEGEND:

M.O. = MASONRY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

3 WIDE ELEVATIONS

MO BRICKMOLD	99 1/2"(2527)	111 1/2"(2832)
MO FLAT CASING	102 1/2"(2604)	114 1/2"(2908)
ROUGH OPENING	96 3/4"(2457)	108 3/4"(2762)
FRAME SIZE	96"(2438)	108"(2743)
DAYLIGHT OPENING	28 1/8"(664)[3]	30 1/8"(765)[3]
14 15/16"(379) 16 7/16"(416) 12 3/4"(324) 12 (305) 6 1/8"(156)	 SWC3212-3 SWPOC3212-3	 SWC3612-3 SWPOC3612-3
20 15/16"(532) 22 7/16"(570) 18 3/4"(476) 18 (457) 12 1/8"(308)	 SWC3218-3 SWPOC3218-3	 SWC3618-3 SWPOC3618-3
22 15/16"(583) 24 7/16"(621) 20 3/4"(527) 20 (508) 14 1/8"(359)	 SWC3220-3 SWPOC3220-3	 SWC3620-3 SWPOC3620-3
26 15/16"(684) 28 7/16"(722) 24 3/4"(628) 24 (610) 18 1/8"(460)	 SWC3224-3 SWPOC3224-3	 SWC3624-3 SWPOC3624-3
30 15/16"(766) 32 7/16"(804) 28 3/4"(730) 28 (711) 22 1/8"(562)	 SWC3228-3 SWPOC3228-3	 SWC3628-3 SWPOC3628-3
32 15/16"(837) 34 7/16"(875) 30 3/4"(781) 30 (762) 24 1/8"(613)	 SWC3230-3 SWPOC3230-3	 SWC3630-3 SWPOC3630-3
38 15/16"(989) 40 7/16"(1027) 36 3/4"(933) 36 (914) 30 1/8"(765)	 SWC3236-3 SWPOC3236-3	 SWC3636-3 SWPOC3636-3
44 15/16"(1141) 46 7/16"(1180) 42 3/4"(1086) 42 (1067) 36 1/8"(916)	 SWC3242-3 SWPOC3242-3	 SWC3642-3 SWPOC3642-3
50 15/16"(1294) 52 7/16"(1332) 48 3/4"(1238) 48 (1219) 42 1/8"(1070)	 SWC3248-3 SWPOC3248-3	 SWC3648-3 SWPOC3648-3
56 15/16"(1446) 58 7/16"(1484) 54 3/4"(1391) 54 (1371) 48 1/8"(1222)	 SWC3254-3 SWPOC3254-3	 SWC3654-3 SWPOC3654-3
62 15/16"(1599) 64 7/16"(1637) 60 3/4"(1543) 60 (1524) 54 1/8"(1375)	 SWC3260-3 SWPOC3260-3	 SWC3660-3 SWPOC3660-3

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

3 WIDE ELEVATIONS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

99 1/2"(2527)
102 1/2"(2604)
96 3/4"(2457)
98"(2438)
26 1/8"(664)[3]

111 1/2"(2832)
114 1/2"(2908)
108 3/4"(2762)
108"(2743)
30 1/8"(765)[3]

14 15/16"(379)
16 7/16"(418)
12 3/4"(324)
12"(306)
6 1/8"(156)

20 15/16"(532)
22 7/16"(570)
18 3/4"(476)
18"(457)
12 1/8"(308)

22 15/16"(583)
24 7/16"(621)
20 3/4"(527)
20"(508)
14 1/8"(359)

26 15/16"(684)
28 7/16"(722)
24 3/4"(628)
24"(610)
18 1/8"(460)

30 15/16"(786)
32 7/16"(824)
28 3/4"(730)
28"(711)
22 1/8"(562)

32 15/16"(837)
34 7/16"(875)
30 3/4"(781)
30"(762)
24 1/8"(613)


38 15/16"(989)
40 7/16"(1027)
36 3/4"(933)
36"(914)
30 1/8"(765)

44 15/16"(1141)
46 7/16"(1180)
42 3/4"(1086)
42"(1067)
36 1/8"(918)

50 15/16"(1294)
52 7/16"(1332)
48 3/4"(1238)
48"(1219)
42 7/8"(1070)

56 15/16"(1446)
58 7/16"(1484)
54 3/4"(1391)
54"(1372)
48 1/8"(1222)

62 15/16"(1599)
64 7/16"(1637)
60 3/4"(1543)
60"(1524)
54 1/8"(1375)

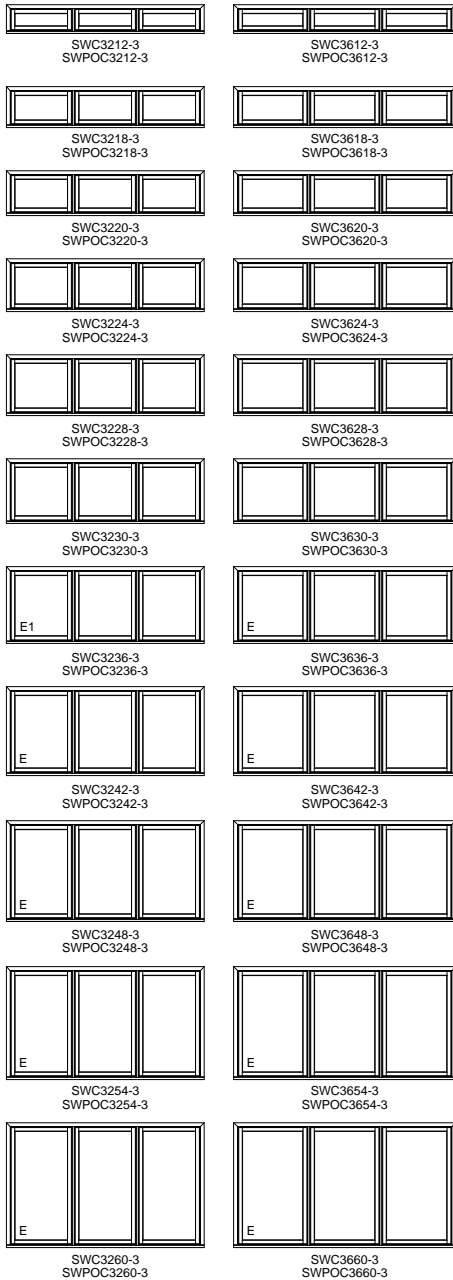

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

4 WIDE ELEVATIONS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

75 1/2"(1918)
78 1/2"(1994)
72 3/4"(1238)
72"(1219)
12 1/8"(308)[4]

83 1/2"(2121)
86 1/2"(2197)
80 3/4"(2051)
80"(2032)
14 1/8"(359)[4]

99 1/2"(2527)
102 1/2"(2604)
96 3/4"(2457)
96"(2438)
18 1/8"(460)[4]

115 1/2"(2934)
118 1/2"(3010)
112 3/4"(2864)
112"(2849)
22 1/8"(562)[4]

123 1/2"(3137)
126 1/2"(3213)
120 3/4"(3067)
120"(3048)
24 1/8"(613)[4]


14 15/16"(379)
16 7/16"(418)
12 3/4"(324)
12"(305)
6 1/8"(156)
20 15/16"(532)
22 7/16"(570)
18 3/4"(476)
18"(457)
12 1/8"(308)
22 15/16"(584)
24 7/16"(621)
20 3/4"(527)
20"(508)
14 1/8"(359)
26 15/16"(684)
28 7/16"(722)
24 3/4"(629)
24"(610)
18 1/8"(460)
30 15/16"(786)
32 7/16"(824)
28 3/4"(730)
28"(711)
22 1/8"(562)
32 15/16"(837)
34 7/16"(875)
30 3/4"(781)
30"(762)
24 1/8"(613)
38 15/16"(989)
40 7/16"(1027)
36 3/4"(933)
36"(914)
30 1/8"(765)
44 15/16"(1141)
46 7/16"(1180)
42 3/4"(1086)
42"(1067)
36 1/8"(916)
50 15/16"(1284)
52 7/16"(1322)
48 3/4"(1238)
48"(1219)
42 1/8"(1070)
56 15/16"(1446)
58 7/16"(1484)
54 3/4"(1391)
54"(1372)
46 1/8"(1222)
62 15/16"(1599)
64 7/16"(1637)
60 3/4"(1543)
60"(1524)
54 1/8"(1375)

ELEVATION SYMBOL LEGEND:
M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

4 WIDE ELEVATIONS

MO BRICKMOLD	75 1/2"(1918)	83 1/2"(2121)	99 1/2"(2527)	115 1/2"(2934)	123 1/2"(3137)
MO FLAT CASING	78 1/2"(1994)	86 1/2"(2197)	102 1/2"(2604)	118 1/2"(3010)	126 1/2"(3213)
ROUGH OPENING	72 3/4"(1238)	80 3/4"(2051)	96 3/4"(2457)	112 3/4"(2864)	120 3/4"(3067)
FRAME SIZE	72"(1219)	80"(2032)	96"(2438)	112"(2849)	120"(3048)
DAYLIGHT OPENING	12 1/8"(308)[4]	14 1/8"(359)[4]	18 1/8"(460)[4]	22 1/8"(562)[4]	24 1/8"(613)[4]

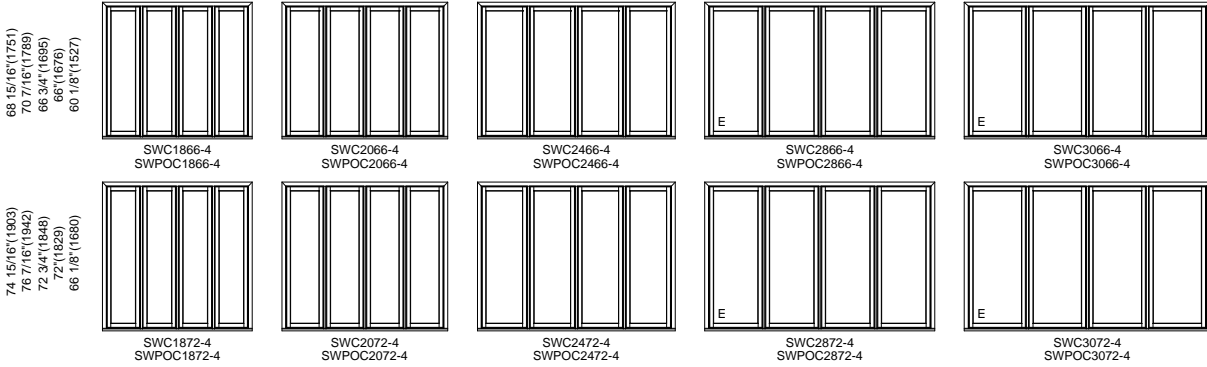

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

4 WIDE ELEVATIONS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

131 1/2"(3340)
134 1/2"(3416)
128 3/4"(3270)
128"(3251)
26 1/8"(664)[4]

147 1/2"(3747)
150 1/2"(3823)
144 3/4"(3678)
144"(3658)
30 1/8"(765)[4]

14 15/16"(379)
16 7/16"(418)
12 3/4"(324)
12 (305)
6 1/8"(156)
20 15/16"(532)
22 7/16"(570)
18 3/4"(476)
18 (457)
12 1/8"(308)
22 15/16"(583)
24 7/16"(621)
20 3/4"(527)
20 (508)
14 1/8"(359)
26 15/16"(684)
28 7/16"(722)
24 3/4"(628)
24 (610)
18 1/8"(460)
30 15/16"(786)
32 7/16"(824)
28 3/4"(730)
28 (711)
22 1/8"(562)
32 15/16"(837)
34 7/16"(875)
30 3/4"(781)
30 (762)
24 1/8"(613)
38 15/16"(989)
40 7/16"(1027)
36 3/4"(933)
36 (914)
30 1/8"(765)
44 15/16"(1141)
46 7/16"(1180)
42 3/4"(1086)
42 (1067)
36 1/8"(918)
50 15/16"(1294)
52 7/16"(1332)
48 3/4"(1238)
48 (1219)
42 1/8"(1070)
56 15/16"(1446)
58 7/16"(1484)
54 3/4"(1391)
54 (1372)
48 1/8"(1222)
62 15/16"(1599)
64 7/16"(1637)
60 3/4"(1543)
60 (1524)
54 1/8"(1375)

SWC3212-4 SWPOC3212-4	SWC3612-4 SWPOC3612-4
SWC3218-4 SWPOC3218-4	SWC3618-4 SWPOC3618-4
SWC3220-4 SWPOC3220-4	SWC3620-4 SWPOC3620-4
SWC3224-4 SWPOC3224-4	SWC3624-4 SWPOC3624-4
SWC3228-4 SWPOC3228-4	SWC3628-4 SWPOC3628-4
SWC3230-4 SWPOC3230-4	SWC3630-4 SWPOC3630-4
SWC3236-4 SWPOC3236-4	SWC3636-4 SWPOC3636-4
SWC3242-4 SWPOC3242-4	SWC3642-4 SWPOC3642-4
SWC3248-4 SWPOC3248-4	SWC3648-4 SWPOC3648-4
SWC3254-4 SWPOC3254-4	SWC3654-4 SWPOC3654-4
SWC3260-4 SWPOC3260-4	SWC3660-4 SWPOC3660-4

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


4 WIDE ELEVATIONS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

131 1/2"(3340)
134 1/2"(3416)
128 3/4"(3278)
128"(3251)
26 1/8"(664)[4]

147 1/2"(3747)
150 1/2"(3823)
144 3/4"(3678)
144"(3658)
30 1/8"(765)[4]

14 15/16"(379)
16 7/16"(418)
12 3/4"(324)
12"(305)
6 1/8"(156)
20 15/16"(532)
22 7/16"(570)
18 3/4"(476)
18"(457)
12 1/8"(308)
22 15/16"(583)
24 7/16"(621)
20 3/4"(527)
20"(508)
14 1/8"(359)
26 15/16"(684)
28 7/16"(722)
24 3/4"(628)
24"(610)
18 1/8"(460)
30 15/16"(786)
32 7/16"(824)
28 3/4"(730)
28"(711)
22 1/8"(562)
32 15/16"(837)
34 7/16"(875)
30 3/4"(781)
30"(762)
24 1/8"(613)
38 15/16"(989)
40 7/16"(1027)
36 3/4"(933)
36"(914)
30 1/8"(765)
44 15/16"(1141)
46 7/16"(1180)
42 3/4"(1086)
42"(1067)
36 1/8"(916)
50 15/16"(1294)
52 7/16"(1332)
48 3/4"(1238)
48"(1219)
42 1/8"(1070)
56 15/16"(1446)
58 7/16"(1484)
54 3/4"(1391)
54"(1372)
48 1/8"(1222)
62 15/16"(1599)
64 7/16"(1637)
60 3/4"(1543)
60"(1524)
54 1/8"(1375)

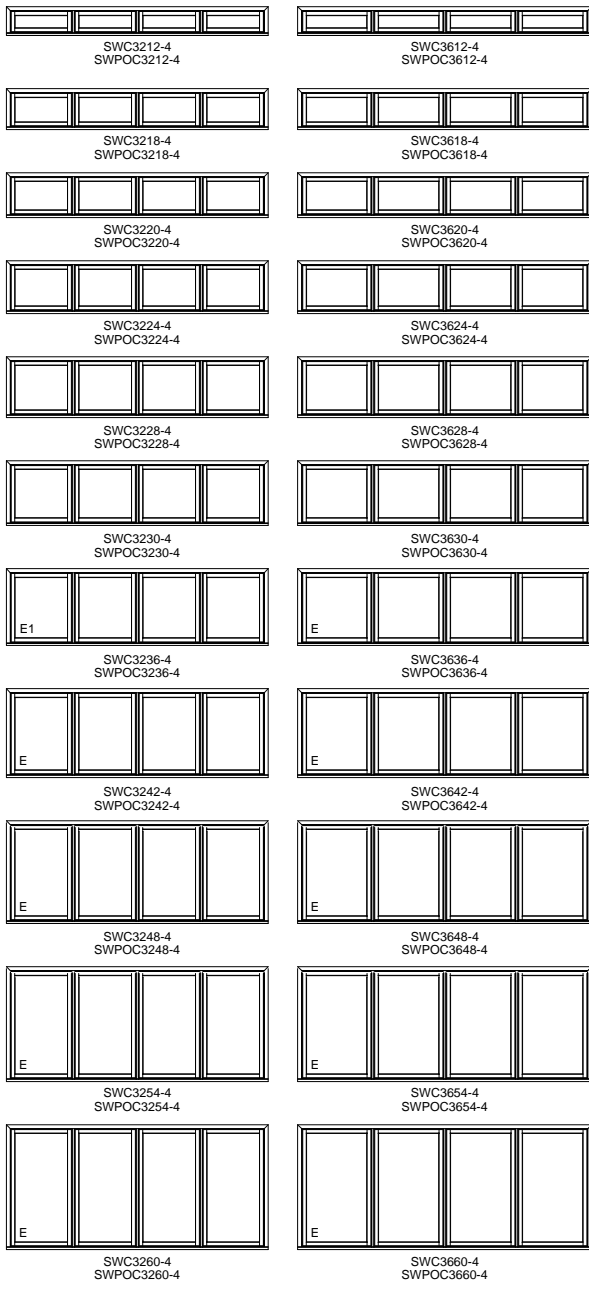

ELEVATION SYMBOL LEGEND:
M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

5 WIDE ELEVATIONS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

93 1/2"(2375)
96 1/2"(2451)
90 3/4"(2305)
90"(2286)
12 1/8"(308)[5]

103 1/2"(2629)
106 1/2"(2705)
100 3/4"(2559)
100"(2540)
14 1/8"(359)[5]

123 1/2"(3137)
126 1/2"(3213)
120 3/4"(3067)
120"(3048)
18 1/8"(460)[5]

143 1/2"(3645)
146 1/2"(3721)
140 3/4"(3575)
140"(3556)
22 1/8"(562)[5]

14 15/16"(379)
16 7/16"(418)
12 3/4"(324)
12"(305)
12"(305)
6 1/8"(156)
20 15/16"(532)
22 7/16"(570)
18 3/4"(476)
18"(457)
18"(457)
12 1/8"(308)
22 15/16"(583)
24 7/16"(621)
20 3/4"(527)
20"(508)
14 1/8"(359)
26 15/16"(684)
28 7/16"(722)
24 3/4"(629)
24"(610)
18 1/8"(460)
30 15/16"(786)
32 7/16"(824)
28 3/4"(730)
28"(711)
22 1/8"(562)
32 15/16"(837)
34 7/16"(875)
30 3/4"(781)
30"(762)
24 1/8"(613)
38 15/16"(989)
40 7/16"(1027)
36 3/4"(933)
36"(914)
30 1/8"(765)
44 15/16"(1141)
46 7/16"(1180)
42 3/4"(1086)
42"(1067)
36 1/8"(918)
50 15/16"(1294)
52 7/16"(1332)
48 3/4"(1238)
48"(1219)
42 1/8"(1070)
56 15/16"(1446)
58 7/16"(1484)
54 3/4"(1391)
54"(1372)
48 1/8"(1222)
62 15/16"(1599)
64 7/16"(1637)
60 3/4"(1543)
60"(1524)
54 1/8"(1375)

SWC1812-5 SWPOC1812-5	SWC2012-5 SWPOC2012-5	SWC2412-5 SWPOC2412-5	SWC2812-5 SWPOC2812-5
SWC1818-5 SWPOC1818-5	SWC2018-5 SWPOC2018-5	SWC2418-5 SWPOC2418-5	SWC2818-5 SWPOC2818-5
SWC1820-5 SWPOC1820-5	SWC2020-5 SWPOC2020-5	SWC2420-5 SWPOC2420-5	SWC2820-5 SWPOC2820-5
SWC1824-5 SWPOC1824-5	SWC2024-5 SWPOC2024-5	SWC2424-5 SWPOC2424-5	SWC2824-5 SWPOC2824-5
SWC1828-5 SWPOC1828-5	SWC2028-5 SWPOC2028-5	SWC2428-5 SWPOC2428-5	SWC2828-5 SWPOC2828-5
SWC1830-5 SWPOC1830-5	SWC2030-5 SWPOC2030-5	SWC2430-5 SWPOC2430-5	SWC2830-5 SWPOC2830-5
SWC1836-5 SWPOC1836-5	SWC2036-5 SWPOC2036-5	SWC2436-5 SWPOC2436-5	SWC2836-5 SWPOC2836-5
SWC1842-5 SWPOC1842-5	SWC2042-5 SWPOC2042-5	SWC2442-5 SWPOC2442-5	SWC2842-5 SWPOC2842-5
SWC1848-5 SWPOC1848-5	SWC2048-5 SWPOC2048-5	SWC2448-5 SWPOC2448-5	SWC2848-5 SWPOC2848-5
SWC1854-5 SWPOC1854-5	SWC2054-5 SWPOC2054-5	SWC2454-5 SWPOC2454-5	SWC2854-5 SWPOC2854-5
SWC1860-5 SWPOC1860-5	SWC2060-5 SWPOC2060-5	SWC2460-5 SWPOC2460-5	SWC2860-5 SWPOC2860-5


ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

5 WIDE ELEVATIONS

MO BRICKMOLD	93 1/2"(2375)	103 1/2"(2629)	123 1/2"(3137)	143 1/2"(3645)
MO FLAT CASING	96 1/2"(2451)	106 1/2"(2705)	126 1/2"(3213)	146 1/2"(3721)
ROUGH OPENING	90 3/4"(2305)	100 3/4"(2559)	120 3/4"(3067)	140 3/4"(3575)
FRAME SIZE	90"(2286)	100"(2540)	120"(3048)	140"(3556)
DAYLIGHT OPENING	12 1/8"(308)[5]	14 1/8"(359)[5]	18 1/8"(460)[5]	22 1/8"(562)[5]

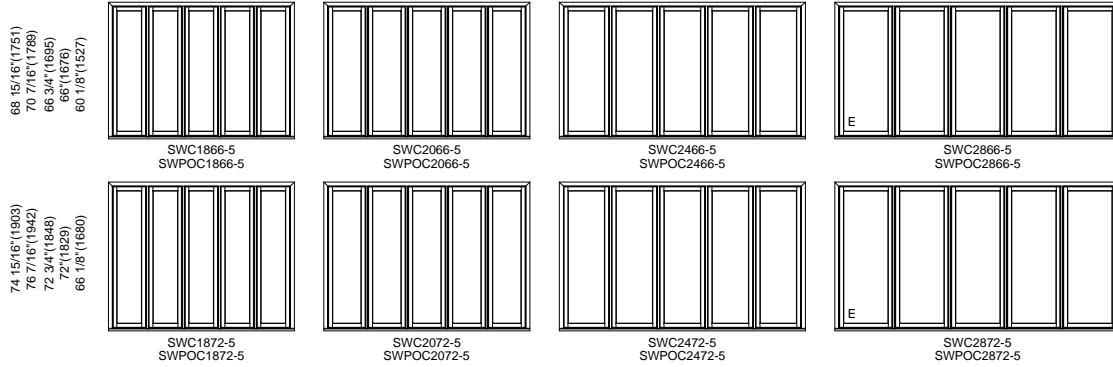

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

5 WIDE ELEVATIONS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

153 1/2"(3899)
156 1/2"(3975)
159 3/4"(3829)
150"(3810)
24 1/8"(613)[5]

163 1/2"(4153)
166 1/2"(4229)
160 3/4"(4083)
160"(4064)
26 1/8"(664)[5]

183 1/2"(4661)
186 1/2"(4737)
180 3/4"(4591)
180"(4572)
30 1/8"(765)[5]

14 15/16"(379)
16 7/16"(418)
12 3/4"(324)
12"(306)
6 1/8"(156)

20 15/16"(532)
22 7/16"(570)
18 3/4"(476)
18"(457)
12 1/8"(308)

22 15/16"(583)
24 7/16"(621)
20 3/4"(527)
20"(508)
14 1/8"(359)

26 15/16"(684)
28 7/16"(722)
24 3/4"(628)
24"(610)
18 1/8"(460)

30 15/16"(786)
32 7/16"(824)
28 3/4"(730)
28"(711)
22 1/8"(562)

32 15/16"(837)
34 7/16"(875)
30 3/4"(781)
30"(762)
24 1/8"(613)

38 15/16"(989)
40 7/16"(1027)
36 3/4"(933)
36"(914)
30 1/8"(765)

44 15/16"(1141)
46 7/16"(1180)
42 3/4"(1086)
42"(1067)
36 1/8"(918)

50 15/16"(1294)
52 7/16"(1332)
48 3/4"(1238)
48"(1219)
42 1/8"(1070)

56 15/16"(1446)
58 7/16"(1484)
54 3/4"(1391)
54"(1372)
48 1/8"(1222)

62 15/16"(1599)
64 7/16"(1637)
60 3/4"(1543)
60"(1524)
54 1/8"(1375)

SWC3012-5 SWPOC3012-5	SWC3212-5 SWPOC3212-5	SWC3612-5 SWPOC3612-5
SWC3018-5 SWPOC3018-5	SWC3218-5 SWPOC3218-5	SWC3618-5 SWPOC3618-5
SWC3020-5 SWPOC3020-5	SWC3220-5 SWPOC3220-5	SWC3620-5 SWPOC3620-5
SWC3024-5 SWPOC3024-5	SWC3224-5 SWPOC3224-5	SWC3624-5 SWPOC3624-5
SWC3028-5 SWPOC3028-5	SWC3228-5 SWPOC3228-5	SWC3628-5 SWPOC3628-5
SWC3030-5 SWPOC3030-5	SWC3230-5 SWPOC3230-5	SWC3630-5 SWPOC3630-5
SWC3036-5 SWPOC3036-5	SWC3236-5 SWPOC3236-5	SWC3636-5 SWPOC3636-5
SWC3042-5 SWPOC3042-5	SWC3242-5 SWPOC3242-5	SWC3642-5 SWPOC3642-5
SWC3048-5 SWPOC3048-5	SWC3248-5 SWPOC3248-5	SWC3648-5 SWPOC3648-5
SWC3054-5 SWPOC3054-5	SWC3254-5 SWPOC3254-5	SWC3654-5 SWPOC3654-5
SWC3060-5 SWPOC3060-5	SWC3260-5 SWPOC3260-5	SWC3660-5 SWPOC3660-5

ELEVATION SYMBOL LEGEND:
M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

CASEMENT PICTURE ELEVATIONS

M.O. BRICKMOULD	45 1/2"(1156)	51 1/2"(1308)	57 1/2"(1461)	63 1/2"(1613)
M.O. ADAMS/FLAT CASING	48 1/2"(1232)	54 1/2"(1384)	60 1/2"(1537)	66 1/2"(1689)
ROUGH OPENING	42 3/4"(1086)	48 3/4"(1238)	54 3/4"(1391)	60 3/4"(1543)
FRAME SIZE	42"(1067)	48"(1219)	54"(1372)	60"(1524)
DAYLIGHT OPENING	36 1/8"(918)	42 1/8"(1070)	48 1/8"(1222)	54 1/8"(1375)
14 15/16"(379) 16 7/16"(416) 12 3/4"(324) 12 (305) 6 1/8"(156)				
20 15/16"(522) 22 7/16"(570) 18 3/4"(476) 18 1/8"(466) 12 1/8"(308)				
22 15/16"(583) 24 7/16"(621) 20 3/4"(527) 20 (508) 14 1/8"(359)				
26 15/16"(684) 28 7/16"(722) 24 3/4"(629) 24 (610) 18 1/8"(460)				
30 15/16"(786) 32 7/16"(824) 28 3/4"(730) 28 (711) 22 1/8"(562)				
32 15/16"(837) 34 7/16"(875) 30 3/4"(781) 30 (762) 24 1/8"(613)				
38 15/16"(989) 40 7/16"(1027) 36 3/4"(933) 36 (914) 30 1/8"(765)				
44 15/16"(1141) 46 7/16"(1180) 42 3/4"(1086) 42 (1067) 36 1/8"(918)				





















ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

CASEMENT PICTURE ELEVATIONS

M.O. BRICKMOULD	45 1/2"(1156)	51 1/2"(1308)	57 1/2"(1461)	63 1/2"(1613)
M.O. ADAMS/FLAT CASING	48 1/2"(1232)	54 1/2"(1384)	60 1/2"(1537)	66 1/2"(1689)
ROUGH OPENING	42 3/4"(1086)	48 3/4"(1238)	54 3/4"(1391)	60 3/4"(1543)
FRAME SIZE	42"(1067)	48"(1219)	54"(1372)	60"(1524)
DAYLIGHT OPENING	36 1/8"(918)	42 1/8"(1070)	48 1/8"(1222)	54 1/8"(1375)

50 15/16"(1294) 52 7/16"(1332) 48 3/4"(1238) 46 1/2"(1219) 42 1/8"(1070)				
	SWCP4248 SWPOCP4248	SWCP4248 SWPOCP4248	SWCP4248 SWPOCP4248	SWCP4248 SWPOCP4248
56 15/16"(1446) 58 7/16"(1484) 54 3/4"(1391) 54"(1372) 48 1/8"(1222)				
	SWCP4254 SWPOCP4254	SWCP4254 SWPOCP4254	SWCP4254 SWPOCP4254	SWCP4254 SWPOCP4254
62 15/16"(1599) 64 7/16"(1637) 60 3/4"(1543) 60"(1524) 54 1/8"(1375)				
	SWCP42160 SWPOCP4260	SWCP4260 SWPOCP4260	SWCP4260 SWPOCP4260	SWCP4260 SWPOCP4260
68 15/16"(1751) 70 7/16"(1789) 66 3/4"(1695) 66"(1676) 60 1/8"(1527)				
	SWCP4266 SWPOCP4266	SWCP4266 SWPOCP4266	SWCP4266 SWPOCP4266	SWCP4266 SWPOCP4266
74 15/16"(1903) 76 7/16"(1942) 72 3/4"(1848) 72"(1829) 66 1/8"(1680)				
	SWCP4272 SWPOCP4272	SWCP4272 SWPOCP4272	SWCP4272 SWPOCP4272	SWCP4272 SWPOCP4272

ELEVATION SYMBOL LEGEND:


M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES PREFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O. (Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


CASEMENT PICTURE ELEVATIONS

M.O. BRICKMOULD	45 1/2"(1156)	51 1/2"(1308)	57 1/2"(1461)	63 1/2"(1613)
M.O. ADAMS/FLAT CASING	48 1/2"(1232)	54 1/2"(1384)	60 1/2"(1537)	66 1/2"(1689)
ROUGH OPENING	42 3/4"(1086)	48 3/4"(1238)	54 3/4"(1391)	60 3/4"(1543)
FRAME SIZE	42"(1067)	48"(1219)	54"(1372)	60"(1524)
DAYLIGHT OPENING	36 1/8"(918)	42 1/8"(1070)	48 1/8"(1222)	54 1/8"(1375)


80 15/16"(2056)
82 7/16"(2094)
78 3/4"(2000)
78 1/8"(1981)
72 1/8"(1832)




SWCP4278
SWPOCP4278



SWCP4278
SWPOCP4278




SWCP4278
SWPOCP4278




SWCP4278
SWPOCP4278


86 15/16"(2208)
88 7/16"(2246)
84 3/4"(2153)
84"(2134)
78 1/8"(1984)




SWCP4284
SWPOCP4284



SWCP4284
SWPOCP4284




SWCP4284
SWPOCP4284




SWCP4284
SWPOCP4284


98 15/16"(2513)
100 7/16"(2551)
96 3/4"(2457)
96"(2438)
90 1/8"(2289)




SWCP4296
SWPOCP4296



SWCP4296
SWPOCP4296



SWCP4296
SWPOCP4296



SWCP4296
SWPOCP4296

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES PREFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

CASEMENT PICTURE ELEVATIONS


M.O. BRICKMOUND
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

69 1/2"(1765)
72 1/2"(1842)
66 3/4"(1695)
66"(1676)
60 1/8"(1527)


75 1/2"(1918)
78 1/2"(1994)
72 3/4"(1848)
72"(1829)
66 1/8"(1680)

87 1/2"(2223)
90 1/2"(2299)
84 3/4"(2153)
84"(2134)
78 1/8"(1984)


14 15/16"(379)
16 7/16"(418)
12 3/4"(324)
12"(305)
6 1/8"(156)



SWCP4212
SWPOCP4212



SWCP4212
SWPOCP4212



SWCP8412
SWPOCP8412

20 15/16"(532)
22 7/16"(570)
18 3/4"(476)
18"(508)
12 1/8"(308)



SWCP4218
SWPOCP4218



SWCP4218
SWPOCP4218



SWCP8418
SWPOCP8418

22 15/16"(583)
24 7/16"(621)
20 3/4"(527)
20"(508)
14 1/8"(359)



SWCP4220
SWPOCP4220




SWCP4220
SWPOCP4220




SWCP8420
SWPOCP8420


26 15/16"(684)
28 7/16"(722)
24 3/4"(629)
24"(610)
18 1/8"(460)



SWCP4224
SWPOCP4224




SWCP4224
SWPOCP4224




SWCP8424
SWPOCP8424


30 15/16"(788)
32 7/16"(824)
28 3/4"(730)
28"(711)
22 1/8"(562)



SWCP42128
SWPOCP4228



SWCP4228
SWPOCP4228



SWCP8428
SWPOCP8428

32 15/16"(837)
34 7/16"(875)
30 3/4"(781)
30"(762)
24 1/8"(613)



SWCP4230
SWPOCP4230



SWCP4230
SWPOCP4230



SWCP8430
SWPOCP8430

38 15/16"(989)
40 7/16"(1027)
36 3/4"(933)
36"(914)
30 1/8"(765)



SWCP42136
SWPOCP4236



SWCP4236
SWPOCP4236



SWCP8436
SWPOCP8436

44 15/16"(1141)
46 7/16"(1180)
42 3/4"(1086)
42"(1067)
36 1/8"(918)



SWCP4242
SWPOCP4242



SWCP4242
SWPOCP4242



SWCP8442
SWPOCP8442

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES PREFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

CASEMENT PICTURE ELEVATIONS

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

69 1/2"(1765)
72 1/2"(1842)
66 3/4"(1695)
66"(1676)
60 1/8"(1527)

75 1/2"(1918)
78 1/2"(1994)
72 3/4"(1848)
72"(1829)
66 1/8"(1680)

87 1/2"(2223)
90 1/2"(2299)
84 3/4"(2153)
84"(2134)
78 1/8"(1984)

50 15/16"(1294)
52 7/16"(1332)
48 3/4"(1238)
48"(1219)
42 1/8"(1070)



SWCP4248
SWPOCP4248




SWCP4248
SWPOCP4248



SWCP8448
SWPOCP8448

56 15/16"(1446)
58 7/16"(1484)
54 3/4"(1391)
54"(1372)
48 1/8"(1222)



SWCP4254
SWPOCP4254




SWCP4254
SWPOCP4254




SWCP8454
SWPOCP8454


62 15/16"(1599)
64 7/16"(1637)
60 3/4"(1543)
60"(1524)
54 1/8"(1375)



SWCP4260
SWPOCP4260




SWCP4260
SWPOCP4260




SWCP8460
SWPOCP8460

68 15/16"(1751)
70 7/16"(1789)
66 3/4"(1695)
66"(1676)
60 1/8"(1527)



SWCP4266
SWPOCP4266




SWCP4266
SWPOCP4266




SWCP8466
SWPOCP8466


74 15/16"(1903)
76 7/16"(1942)
72 3/4"(1848)
72"(1829)
66 1/8"(1680)



SWCP4272
SWPOCP4272



SWCP4272
SWPOCP4272



SWCP8472
SWPOCP8472

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES PREFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

CASEMENT PICTURE ELEVATIONS


M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

69 1/2"(1765)
72 1/2"(1842)
66 3/4"(1695)
66"(1676)
60 1/8"(1527)


75 1/2"(1918)
78 1/2"(1994)
72 3/4"(1848)
72"(1829)
66 1/8"(1680)

87 1/2"(2223)
90 1/2"(2299)
84 3/4"(2153)
84"(2134)
78 1/8"(1984)


80 15/16"(2066)
82 1/16"(2094)
78 3/4"(1990)
78"(1981)
72 1/8"(1832)



SWCP4278
SWPOCP4278




SWCP4278
SWPOCP4278




SWCP8478
SWPOCP8478


86 15/16"(2208)
88 7/16"(2246)
84 3/4"(2153)
84"(2134)
78 1/8"(1984)



SWCP4284
SWPOCP4284




SWCP4284
SWPOCP4284




SWCP8484
SWPOCP8484

98 15/16"(2513)
100 7/16"(2551)
96 3/4"(2457)
96"(2438)
90 1/8"(2289)



SWCP4296
SWPOCP4296



SWCP4296
SWPOCP4296

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES PREFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING


Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

CASEMENT PICTURE ELEVATIONS

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

99 1/2"(2527)
102 1/2"(2604)
96 3/4"(2457)
96"(2438)
90 1/8"(2289)

14 15/16"(379)
16 7/16"(418)
12 3/4"(324)
12"(305)
6 1/8"(156)




SWCP9612
SWPOCP9612

20 15/16"(532)
22 7/16"(570)
18 3/4"(476)
18"(508)
12 1/8"(308)




SWCP9618
SWPOCP9618

22 15/16"(683)
24 7/16"(621)
20 3/4"(527)
20"(508)
14 1/8"(359)




SWCP9620
SWPOCP9620

26 15/16"(684)
28 7/16"(722)
24 3/4"(629)
24"(610)
18 1/8"(460)




SWCP9624
SWPOCP9624

30 15/16"(786)
32 7/16"(824)
28 3/4"(730)
28"(711)
22 1/8"(562)




SWCP9628
SWPOCP9628

32 15/16"(837)
34 7/16"(875)
30 3/4"(781)
30"(762)
24 1/8"(613)




SWCP9630
SWPOCP9630

38 15/16"(989)
40 7/16"(1027)
36 3/4"(933)
36"(914)
30 1/8"(765)

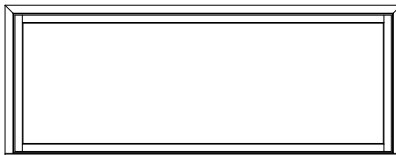

SWCP9636
SWPOCP9636

44 15/16"(1141)
46 7/16"(1180)
42 3/4"(1086)
42"(1067)
36 1/8"(918)

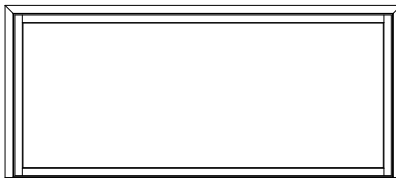

SWCP9642
SWPOCP9642


ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


99 1/2"(2527)
102 1/2"(2604)
96 3/4"(2457)
96"(2438)
90 1/8"(2289)

50 15/16"(1294)
52 7/16"(1332)
48 3/4"(1238)
48"(1219)
42 1/8"(1070)

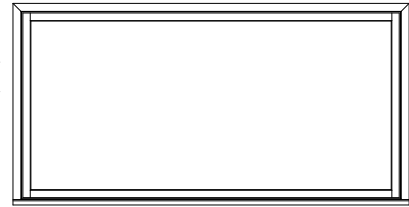


SWCP9648
SWPOCP9648

56 15/16"(1446)
58 7/16"(1484)
54 3/4"(1381)
54"(1372)
48 1/8"(1222)

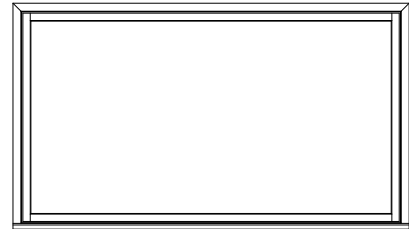


SWCP9654
SWPOCP9654

62 15/16"(1599)
64 7/16"(1637)
60 3/4"(1543)
60"(1524)
54 1/8"(1375)

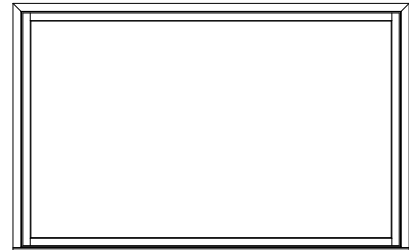


SWCP9660
SWPOCP9660

68 15/16"(1751)
70 7/16"(1789)
66 3/4"(1685)
66"(1676)
60 1/8"(1527)

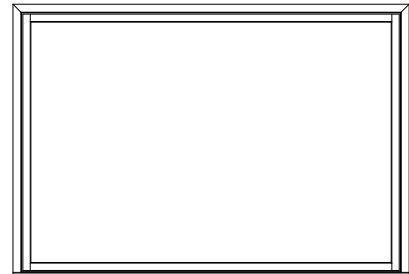

SWCP9666
SWPOCP9666

74 15/16"(1903)
76 7/16"(1942)
72 3/4"(1848)
72"(1829)
66 1/8"(1680)



SWCP9672
SWPOCP9672

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O. (Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

CASEMENT SECTOR TOP ELEVATIONS

M.O. BRICKMOULD	21 1/2"(546)	23 1/2"(597)	27 1/2"(699)	31 1/2"(800)	33 1/2"(851)	35 1/2"(902)	39 1/2"(1003)
M.O. ADAMS/FLAT CASING	24 1/2"(622)	26 1/2"(673)	30 1/2"(775)	34 1/2"(876)	36 1/2"(927)	38 1/2"(978)	42 1/2"(1080)
ROUGH OPENING	18 3/4"(476)	20 3/4"(527)	24 3/4"(629)	28 3/4"(730)	30 3/4"(781)	32 3/4"(832)	36 3/4"(933)
FRAME SIZE	18"(457)	20"(508)	24"(610)	28"(711)	30"(762)	32"(813)	36"(914)
DAYLIGHT OPENING	12 1/8"(308)	14 1/8"(359)	18 1/8"(460)	22 1/8"(562)	24 1/8"(613)	26 1/8"(664)	30 1/8"(765)
20 15/16"(532) 22 7/16"(570) 18 3/4"(476) 18 1/8"(460)							
22 15/16"(583) 24 7/16"(621) 20 3/4"(527) 20 1/8"(508) 14 1/8"(359)							
26 15/16"(684) 28 7/16"(722) 24 3/4"(629) 24 1/8"(610) 18 1/8"(460)							
30 15/16"(786) 32 7/16"(824) 28 3/4"(730) 28 1/8"(711) 22 1/8"(562)							
32 15/16"(837) 34 7/16"(875) 30 3/4"(781) 30 1/8"(762) 24 1/8"(613)							
38 15/16"(989) 40 7/16"(1027) 36 3/4"(933) 36 1/8"(914) 30 1/8"(765)							
44 15/16"(1141) 46 7/16"(1180) 42 3/4"(1086) 42 1/8"(1067) 36 1/8"(916)							


ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
- S STATIONARY UNITS ONLY

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

CASEMENT SECTOR TOP ELEVATIONS

M.O. BRICKMOULD	21 1/2"(546)	23 1/2"(597)	27 1/2"(699)	31 1/2"(800)	33 1/2"(851)	35 1/2"(902)	39 1/2"(1003)
M.O. ADAMS/FLAT CASING	24 1/2"(622)	26 1/2"(673)	30 1/2"(775)	34 1/2"(876)	36 1/2"(927)	38 1/2"(978)	42 1/2"(1080)
ROUGH OPENING	18 3/4"(476)	20 3/4"(527)	24 3/4"(629)	28 3/4"(730)	30 3/4"(781)	32 3/4"(832)	36 3/4"(933)
FRAME SIZE	18"(457)	20"(508)	24"(610)	28"(711)	30"(762)	32"(813)	36"(914)
DAYLIGHT OPENING	12 1/8"(308)	14 1/8"(359)	18 1/8"(460)	22 1/8"(562)	24 1/8"(613)	26 1/8"(664)	30 1/8"(765)

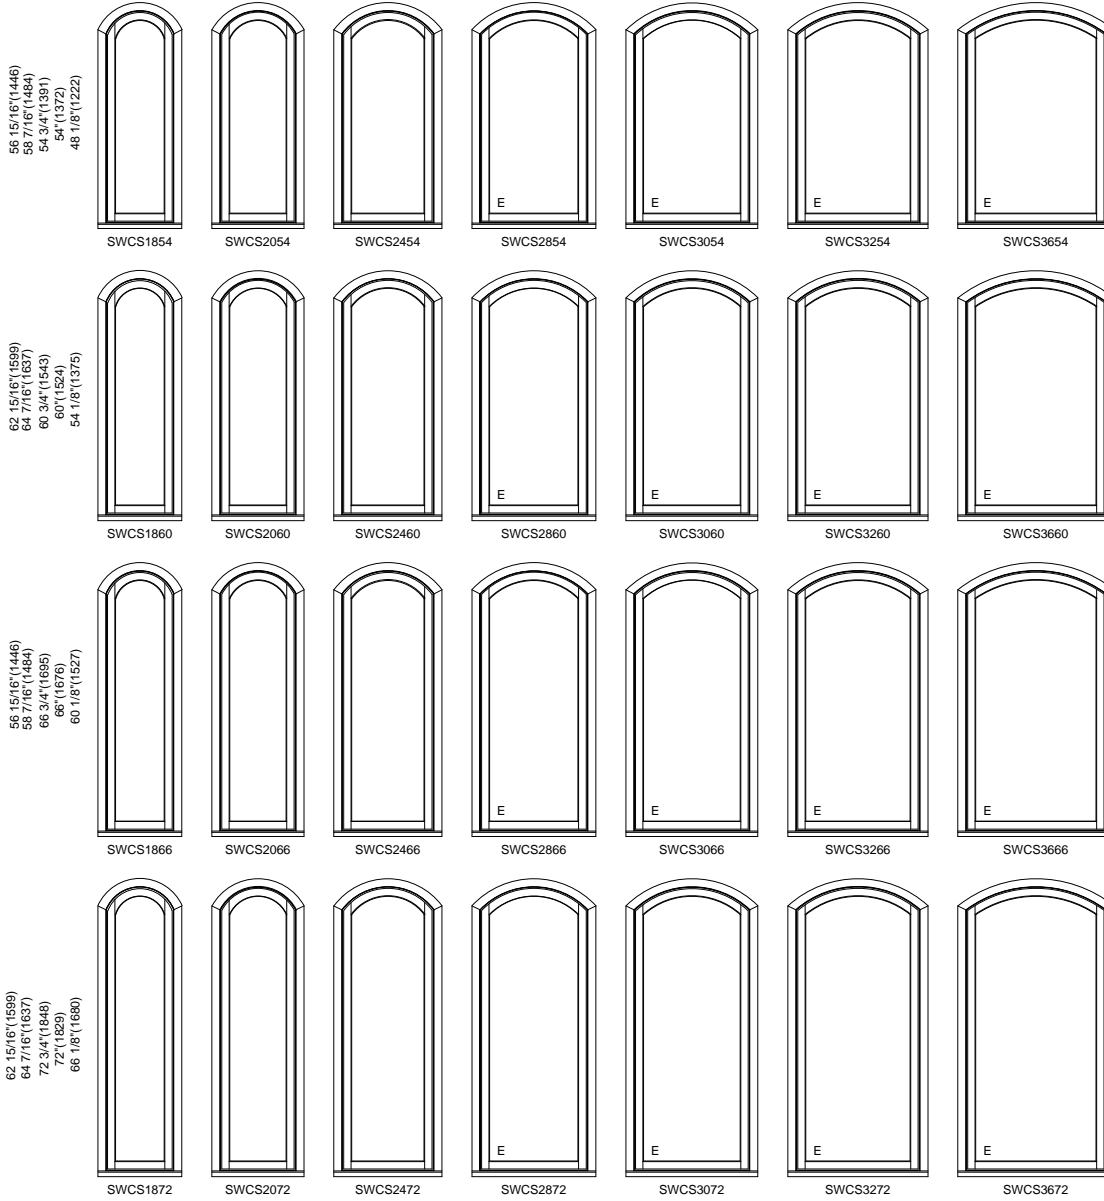


ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
- S STATIONARY UNITS ONLY

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O. (Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

CASEMENT SECTOR TOP ELEVATIONS

M.O. BRICKMOULD	21 1/2"(546)	23 1/2"(597)	27 1/2"(699)	31 1/2"(800)	33 1/2"(851)	35 1/2"(902)	39 1/2"(1003)
M.O. ADAMS/FLAT CASING	24 1/2"(622)	26 1/2"(673)	30 1/2"(775)	34 1/2"(876)	36 1/2"(927)	38 1/2"(978)	42 1/2"(1080)
ROUGH OPENING	18 3/4"(476)	20 3/4"(527)	24 3/4"(629)	28 3/4"(730)	30 3/4"(781)	32 3/4"(832)	36 3/4"(933)
FRAME SIZE	18"(457)	20"(508)	24"(610)	28"(711)	30"(762)	32"(813)	36"(914)
DAYLIGHT OPENING	12 1/8"(308)	14 1/8"(359)	18 1/8"(460)	22 1/8"(562)	24 1/8"(613)	26 1/8"(664)	30 1/8"(765)

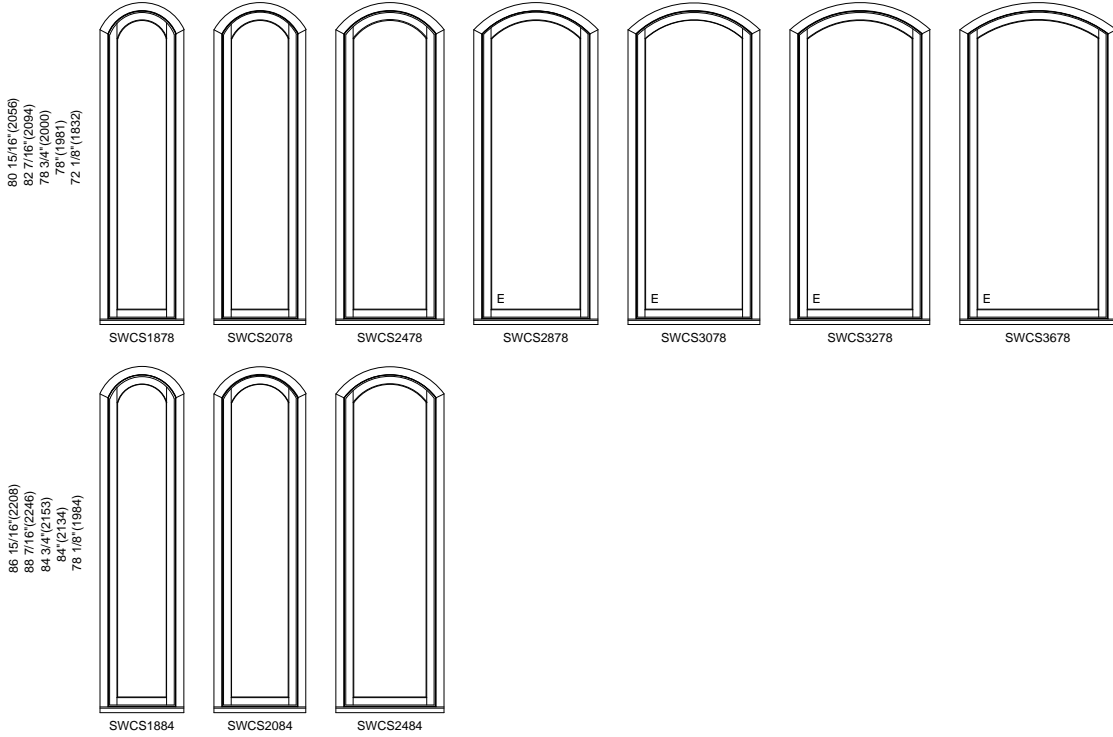

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
- S STATIONARY UNITS ONLY

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

2 WIDE SECTOR TOP ELEVATIONS

MO BRICKMOLD	39 1/2"(1003)	43 1/2"(1105)	51 1/2"(1308)	59 1/2"(1511)	63 1/2"(1613)	67 1/2"(1715)	75 1/2"(1918)
MO FLAT CASING	42 1/2"(1076)	46 1/2"(1181)	54 1/2"(1384)	62 1/2"(1588)	66 1/2"(1689)	70 1/2"(1791)	78 1/2"(1994)
ROUGH OPENING	36 3/4"(933)	40 3/4"(1035)	48 3/4"(1238)	56 3/4"(1441)	60 3/4"(1543)	64 3/4"(1645)	72 3/4"(1848)
FRAME SIZE	36"(914)	40"(1016)	48"(1219)	56"(1422)	60"(1524)	64"(1626)	72"(1829)
DAYLIGHT OPENING	12 1/8"(308)[2]	14 1/8"(359)[2]	18 1/8"(460)[2]	22 1/8"(562)[2]	24 1/8"(613)[2]	26 1/8"(664)[2]	30 1/8"(765)[2]
20 15/16"(532) 22 7/16"(570) 24 7/16"(621) 28 3/4"(730) 30 3/4"(781) 30 7/16"(786) 32 7/16"(824) 34 7/16"(875) 30 3/4"(781) 30 7/16"(786) 24 1/8"(613) 40 7/16"(1027) 36 3/4"(933) 36"(914) 30 1/8"(765) 44 15/16"(1141) 46 7/16"(1180) 42 3/4"(1086) 42"(1067) 36 1/8"(918) 50 15/16"(1294) 52 7/16"(1332) 48 3/4"(1238) 48"(1219) 42 1/8"(1070) 56 15/16"(1446) 58 7/16"(1484) 54 3/4"(1391) 54"(1372) 48 1/8"(1222) 62 15/16"(1599) 64 7/16"(1637) 60 3/4"(1543) 60"(1524) 54 1/8"(1375)	SWCS1818-2	SWCS2018-2	SWCS2418-2	SWCS2818-2	SWCS3018-2	SWCS3218-2	SWCS3618-2
22 15/16"(583) 24 7/16"(621) 20 3/4"(527) 20"(508) 20 1/8"(359) 26 15/16"(684) 28 7/16"(722) 24 3/4"(629) 24"(610) 18 1/8"(460) 30 15/16"(786) 32 7/16"(824) 28 3/4"(730) 28"(711) 22 1/8"(562) 32 15/16"(837) 34 7/16"(875) 30 3/4"(781) 30 7/16"(786) 24 1/8"(613) 38 15/16"(989) 40 7/16"(1027) 36 3/4"(933) 36"(914) 30 1/8"(765) 44 15/16"(1141) 46 7/16"(1180) 42 3/4"(1086) 42"(1067) 36 1/8"(918) 50 15/16"(1294) 52 7/16"(1332) 48 3/4"(1238) 48"(1219) 42 1/8"(1070) 56 15/16"(1446) 58 7/16"(1484) 54 3/4"(1391) 54"(1372) 48 1/8"(1222) 62 15/16"(1599) 64 7/16"(1637) 60 3/4"(1543) 60"(1524) 54 1/8"(1375)	SWCS1820-2	SWCS2020-2	SWCS2420-2	SWCS2820-2	SWCS3020-2	SWCS3220-2	SWCS3620-2
26 15/16"(684) 28 7/16"(722) 24 3/4"(629) 24"(610) 18 1/8"(460) 30 15/16"(786) 32 7/16"(824) 28 3/4"(730) 28"(711) 22 1/8"(562) 32 15/16"(837) 34 7/16"(875) 30 3/4"(781) 30 7/16"(786) 24 1/8"(613) 38 15/16"(989) 40 7/16"(1027) 36 3/4"(933) 36"(914) 30 1/8"(765) 44 15/16"(1141) 46 7/16"(1180) 42 3/4"(1086) 42"(1067) 36 1/8"(918) 50 15/16"(1294) 52 7/16"(1332) 48 3/4"(1238) 48"(1219) 42 1/8"(1070) 56 15/16"(1446) 58 7/16"(1484) 54 3/4"(1391) 54"(1372) 48 1/8"(1222) 62 15/16"(1599) 64 7/16"(1637) 60 3/4"(1543) 60"(1524) 54 1/8"(1375)	SWCS1824-2	SWCS2024-2	SWCS2424-2	SWCS2824-2	SWCS3024-2	SWCS3224-2	SWCS3624-2
30 15/16"(786) 32 7/16"(824) 28 3/4"(730) 28"(711) 22 1/8"(562) 30 15/16"(837) 34 7/16"(875) 30 3/4"(781) 30 7/16"(786) 24 1/8"(613) 38 15/16"(989) 40 7/16"(1027) 36 3/4"(933) 36"(914) 30 1/8"(765) 44 15/16"(1141) 46 7/16"(1180) 42 3/4"(1086) 42"(1067) 36 1/8"(918) 50 15/16"(1294) 52 7/16"(1332) 48 3/4"(1238) 48"(1219) 42 1/8"(1070) 56 15/16"(1446) 58 7/16"(1484) 54 3/4"(1391) 54"(1372) 48 1/8"(1222) 62 15/16"(1599) 64 7/16"(1637) 60 3/4"(1543) 60"(1524) 54 1/8"(1375)	SWCS1828-2	SWCS2028-2	SWCS2428-2	SWCS2828-2	SWCS3028-2	SWCS3228-2	SWCS3628-2
32 15/16"(837) 34 7/16"(875) 30 3/4"(781) 30 7/16"(786) 24 1/8"(613) 38 15/16"(989) 40 7/16"(1027) 36 3/4"(933) 36"(914) 30 1/8"(765) 44 15/16"(1141) 46 7/16"(1180) 42 3/4"(1086) 42"(1067) 36 1/8"(918) 50 15/16"(1294) 52 7/16"(1332) 48 3/4"(1238) 48"(1219) 42 1/8"(1070) 56 15/16"(1446) 58 7/16"(1484) 54 3/4"(1391) 54"(1372) 48 1/8"(1222) 62 15/16"(1599) 64 7/16"(1637) 60 3/4"(1543) 60"(1524) 54 1/8"(1375)	SWCS1830-2	SWCS2030-2	SWCS2430-2	SWCS2830-2	SWCS3030-2	SWCS3230-2	SWCS3630-2
38 15/16"(989) 40 7/16"(1027) 36 3/4"(933) 36"(914) 30 1/8"(765) 44 15/16"(1141) 46 7/16"(1180) 42 3/4"(1086) 42"(1067) 36 1/8"(918) 50 15/16"(1294) 52 7/16"(1332) 48 3/4"(1238) 48"(1219) 42 1/8"(1070) 56 15/16"(1446) 58 7/16"(1484) 54 3/4"(1391) 54"(1372) 48 1/8"(1222) 62 15/16"(1599) 64 7/16"(1637) 60 3/4"(1543) 60"(1524) 54 1/8"(1375)	SWCS1836-2	SWCS2036-2	SWCS2436-2	SWCS2836-2	SWCS3036-2	SWCS3236-2	SWCS3636-2
44 15/16"(1141) 46 7/16"(1180) 42 3/4"(1086) 42"(1067) 36 1/8"(918) 50 15/16"(1294) 52 7/16"(1332) 48 3/4"(1238) 48"(1219) 42 1/8"(1070) 56 15/16"(1446) 58 7/16"(1484) 54 3/4"(1391) 54"(1372) 48 1/8"(1222) 62 15/16"(1599) 64 7/16"(1637) 60 3/4"(1543) 60"(1524) 54 1/8"(1375)	SWCS1842-2	SWCS2042-2	SWCS2442-2	SWCS2842-2	SWCS3042-2	SWCS3242-2	SWCS3642-2
50 15/16"(1294) 52 7/16"(1332) 48 3/4"(1238) 48"(1219) 42 1/8"(1070) 56 15/16"(1446) 58 7/16"(1484) 54 3/4"(1391) 54"(1372) 48 1/8"(1222) 62 15/16"(1599) 64 7/16"(1637) 60 3/4"(1543) 60"(1524) 54 1/8"(1375)	SWCS1848-2	SWCS2048-2	SWCS2448-2	SWCS2848-2	SWCS3048-2	SWCS3248-2	SWCS3648-2
56 15/16"(1446) 58 7/16"(1484) 54 3/4"(1391) 54"(1372) 48 1/8"(1222) 62 15/16"(1599) 64 7/16"(1637) 60 3/4"(1543) 60"(1524) 54 1/8"(1375)	SWCS1854-2	SWCS2054-2	SWCS2454-2	SWCS2854-2	SWCS3054-2	SWCS3254-2	SWCS3654-2
62 15/16"(1599) 64 7/16"(1637) 60 3/4"(1543) 60"(1524) 54 1/8"(1375)	SWCS1860-2	SWCS2060-2	SWCS2460-2	SWCS2860-2	SWCS3060-2	SWCS3260-2	SWCS3660-2


ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

2 WIDE SECTOR TOP ELEVATIONS

MO BRICKMOLD	39 1/2"(1003)	43 1/2"(1105)	51 1/2"(1308)	59 1/2"(1511)	63 1/2"(1613)	67 1/2"(1715)	75 1/2"(1918)
MO FLAT CASING	42 1/2"(1076)	46 1/2"(1181)	54 1/2"(1384)	62 1/2"(1588)	66 1/2"(1689)	70 1/2"(1791)	78 1/2"(1994)
ROUGH OPENING	36 3/4"(933)	40 3/4"(1035)	48 3/4"(1238)	56 3/4"(1441)	60 3/4"(1543)	64 3/4"(1645)	72 3/4"(1848)
FRAME SIZE	36"(914)	40"(1016)	48"(1219)	56"(1422)	60"(1524)	64"(1626)	72"(1829)
DAYLIGHT OPENING	12 1/8"(308)[2]	14 1/8"(359)[2]	18 1/8"(460)[2]	22 1/8"(562)[2]	24 1/8"(613)[2]	26 1/8"(664)[2]	30 1/8"(765)[2]

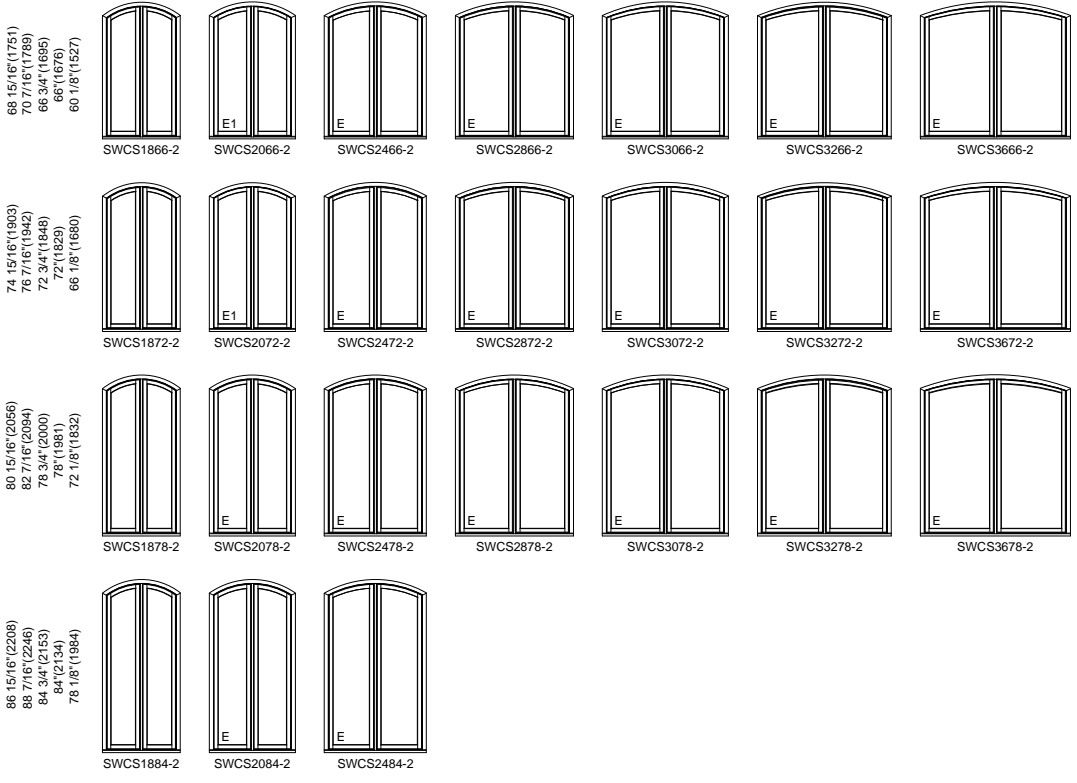

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

3 WIDE SECTOR TOP ELEVATIONS

MO BRICKMOLD	57 1/2"(1461)	63 1/2"(1613)	75 1/2"(1918)	87 1/2"(2223)	93 1/2"(2375)
MO FLAT CASING	60 1/2"(1537)	66 1/2"(1689)	78 1/2"(1994)	90 1/2"(2299)	96 1/2"(2451)
ROUGH OPENING	54 3/4"(1391)	60 3/4"(1543)	72 3/4"(1838)	84 3/4"(2153)	90 3/4"(2305)
FRAME SIZE	54"(1372)	60"(1524)	72"(1819)	84"(2134)	90"(2286)
DAYLIGHT OPENING	12 1/8"(308)[3]	14 1/8"(359)[3]	18 1/8"(460)[3]	22 1/8"(562)[3]	24 1/8"(613)[3]
20 15/16"(532) 22 7/16"(570) 24 1/8"(613)					
22 15/16"(683) 24 7/16"(721) 26 1/8"(664)					
26 15/16"(684) 28 7/16"(722) 30 3/4"(759)					
30 15/16"(766) 32 7/16"(804) 34 1/8"(841)					
32 15/16"(837) 34 7/16"(875) 36 3/4"(912)					
38 15/16"(989) 40 7/16"(1027) 42 1/8"(1064)					
44 15/16"(1141) 46 7/16"(1179) 48 1/8"(1216)					
50 15/16"(1294) 52 7/16"(1332) 54 1/8"(1369)					
56 15/16"(1446) 58 7/16"(1484) 60 3/4"(1521)					
62 15/16"(1599) 64 7/16"(1637) 66 1/8"(1674)					


ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

3 WIDE SECTOR TOP ELEVATIONS

MO BRICKMOLD	57 1/2"(1461)	63 1/2"(1613)	75 1/2"(1918)	87 1/2"(2223)	93 1/2"(2375)
MO FLAT CASING	60 1/2"(1537)	66 1/2"(1689)	78 1/2"(1994)	90 1/2"(2299)	96 1/2"(2451)
ROUGH OPENING	54 3/4"(1391)	60 3/4"(1543)	72 3/4"(1838)	84 3/4"(2153)	90 3/4"(2305)
FRAME SIZE	54"(1372)	60"(1524)	72"(1819)	84"(2134)	90"(2286)
DAYLIGHT OPENING	12 1/8"(308)[3]	14 1/8"(359)[3]	18 1/8"(460)[3]	22 1/8"(562)[3]	24 1/8"(613)[3]

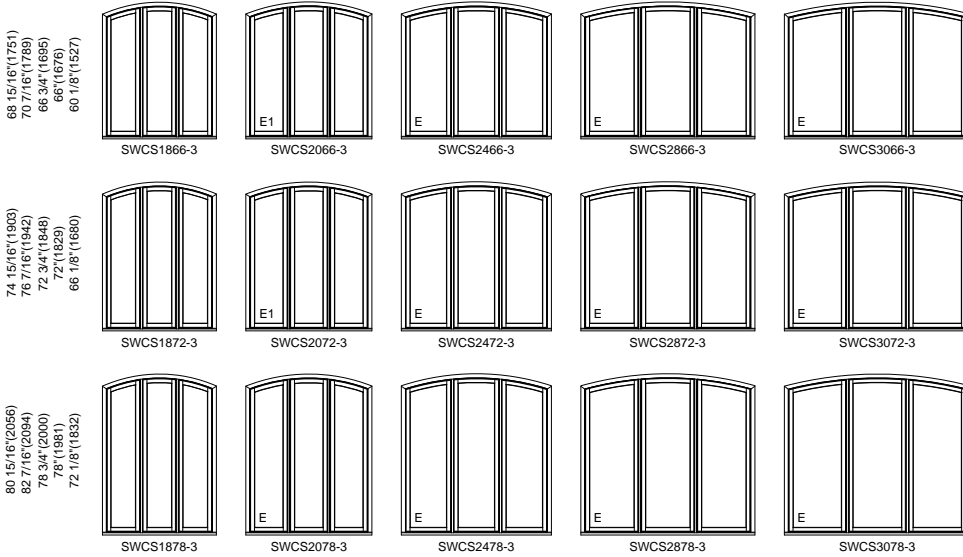

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

3 WIDE SECTOR TOP ELEVATIONS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

99 1/2"(2527)
102 1/2"(2604)
96 3/4"(2457)
96"(2438)
26 1/8"(664)[3]

111 1/2"(2832)
114 1/2"(2908)
108 3/4"(2762)
108"(2743)
30 1/8"(765)[3]

21"(533) 22 1/2"(572) 16 3/4"(476) 18 (457) 12 1/8(306)		
22 (584) 24 1/2 (622) 20 3/4 (527) 20 (508) 14 1/8 (359)		
27 (686) 28 1/2 (724) 24 3/4 (629) 24 (610) 18 1/8 (460)		
31 (787) 32 1/2 (826) 28 3/4 (730) 28 (711) 22 1/8 (562)		
33 (838) 34 1/2 (876) 30 3/4 (781) 30 (762) 24 1/8 (613)		
39 (991) 40 1/2 (1029) 36 3/4 (933) 36 (914) 30 1/8 (765)		
45 (1143) 46 1/2 (1181) 42 3/4 (1086) 42 (1067) 36 1/8 (919)		
51 (1295) 52 1/2 (1334) 48 3/4 (1238) 48 (1219) 42 1/8 (1070)		
57 (1448) 58 1/2 (1486) 54 3/4 (1391) 54 (1372) 48 1/8 (1222)		
63 (1600) 64 1/2 (1638) 60 3/4 (1543) 60 (1524) 54 1/8 (1375)		

ELEVATION SYMBOL LEGEND:

M.O. – MASONRY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

3 WIDE SECTOR TOP ELEVATIONS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

99 1/2"(2527)
102 1/2"(2604)
96 3/4"(2457)
98"(2438)
26 1/8"(664)[3]

111 1/2"(2832)
114 1/2"(2908)
108 3/4"(2762)
108"(2743)
30 1/8"(765)[3]

21"(533) 22 1/2"(572) 18 3/4"(476) 18"(457) 12 1/8"(308)		
23"(584) 24 1/2"(622) 20 3/4"(527) 20"(508) 14 1/8"(359)		
27"(686) 28 1/2"(724) 24 3/4"(629) 24"(610) 18 1/8"(460)		
31"(787) 32 1/2"(826) 28 3/4"(730) 28"(711) 22 1/8"(562)		
33"(838) 34 1/2"(876) 30 3/4"(781) 30"(762) 24 1/8"(613)		
39"(991) 40 1/2"(1029) 36 3/4"(933) 36"(914) 30 1/8"(765)		
45"(1143) 46 1/2"(1181) 42 3/4"(1086) 42"(1067) 36 1/8"(918)		
51"(1295) 52 1/2"(1334) 48 3/4"(1238) 48"(1219) 42 1/8"(1070)		
57"(1448) 58 1/2"(1486) 54 3/4"(1391) 54"(1372) 48 1/8"(1222)		
63"(1600) 64 1/2"(1638) 60 3/4"(1543) 60"(1524) 54 1/8"(1375)		
















ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE WITH 18" FLANKER ELEVATIONS

MO BRICKMOLD	81 1/2"(2070)	93 1/2"(2375)	105 1/2"(2680)
MO FLAT CASING	84 1/2"(2146)	96 1/2"(2451)	108 1/2"(2756)
ROUGH OPENING	78 3/4"(2000)	90 3/4"(2305)	102 3/4"(2610)
FRAME SIZE	78"(1981)	90"(2286)	102"(2590)
DAYLIGHT OPENING	12 1/8"(308)[2]	12 1/8"(308)[2]	12 1/8"(308)[2]
	36 1/8"(918)	48 1/8"(1222)	60 1/8"(1527)

44 15/16"(1141) 46 7/16"(1180) 42 3/4"(1088) 42"(1067) 36 1/8"(918)			
	SWCPF4242-18 SWPOCPF4242-18	SWCPF5442-18 SWPOCPF5442-18	SWCPF6642-18 SWPOCPF6642-18
50 15/16"(1294) 52 1/16"(1334) 48 3/4"(1238) 48"(1219) 42 1/8"(1070)			
	SWCPF4248-18 SWPOCPF4248-18	SWCPF5448-18 SWPOCPF5448-18	SWCPF6648-18 SWPOCPF6648-18
56 15/16"(1446) 58 7/16"(1484) 54 1/4"(1372) 54"(1372) 48 1/8"(1222)			
	SWCPF4254-18 SWPOCPF4254-18	SWCPF5454-18 SWPOCPF5454-18	SWCPF6654-18 SWPOCPF6654-18
62 15/16"(1598) 64 7/16"(1637) 60 3/4"(1543) 60"(1524) 54 1/8"(1375)			
	SWCPF4260-18 SWPOCPF4260-18	SWCPF5460-18 SWPOCPF5460-18	SWCPF6660-18 SWPOCPF6660-18
68 15/16"(1751) 70 1/16"(1791) 66 3/4"(1697) 66"(1678) 60 1/8"(1527)			
	SWCPF4266-18 SWPOCPF4266-18	SWCPF5466-18 SWPOCPF5466-18	SWCPF6666-18 SWPOCPF6666-18
















ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
 ## NUMBER INDICATES PREFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE WITH 20" FLANKER ELEVATIONS

MO BRICKMOLD	85 1/2"(2171)	97 1/2"(2477)	109 1/2"(2781)
MO FLAT CASING	88 1/2"(2248)	100 1/2"(2553)	112 1/2"(2858)
ROUGH OPENING	82 3/4"(2102)	94 3/4"(2407)	106 3/4"(2711)
FRAME SIZE	82"(2083)	94"(2388)	106"(2692)
DAYLIGHT OPENING	14 1/8"(359)[2]	14 1/8"(359)[2]	14 1/8"(359)[2]
	36 1/8"(918)	48 1/8"(1222)	60 1/8"(1527)

44 15/16"(1144) 44 1/16"(1180) 49 3/4"(1086) 42"(1067) 36 1/8"(918)			
	SWCPF4242-20 SWPOCPF4242-20	SWCPF5442-20 SWPOCPF5442-20	SWCPF6642-20 SWPOCPF6642-20
50 15/16"(1294) 52 1/16"(1330) 48 3/4"(1219) 48"(1219) 42 1/8"(1070)			
	SWCPF4248-20 SWPOCPF4248-20	SWCPF5448-20 SWPOCPF5448-20	SWCPF6648-20 SWPOCPF6648-20
56 15/16"(1446) 58 7/16"(1484) 54 1/4"(1372) 54"(1372) 48 1/8"(1222)			
	SWCPF4254-20 SWPOCPF4254-20	SWCPF5454-20 SWPOCPF5454-20	SWCPF6654-20 SWPOCPF6654-20
62 15/16"(1599) 64 1/16"(1637) 60 3/4"(1524) 60"(1524) 54 1/8"(1375)			
	SWCPF4260-20 SWPOCPF4260-20	SWCPF5460-20 SWPOCPF5460-20	SWCPF6660-20 SWPOCPF6660-20
68 15/16"(1751) 70 1/16"(1789) 66 3/4"(1676) 66"(1676) 60 1/8"(1527)			
	SWCPF4266-20 SWPOCPF4266-20	SWCPF5466-20 SWPOCPF5466-20	SWCPF6666-20 SWPOCPF6666-20
















ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE WITH 24" FLANKER ELEVATIONS

MO BRICKMOLD	93 1/2"(2375)	105 1/2"(2680)	117 1/2"(2985)
MO FLAT CASING	96 1/2"(2451)	108 1/2"(2756)	120 1/2"(3061)
ROUGH OPENING	90 3/4"(2305)	102 3/4"(2610)	114 3/4"(2915)
FRAME SIZE	90"(2286)	102"(2590)	114"(2896)
DAYLIGHT OPENING	18 1/8"(460)[2] 36 1/8"(918)	18 1/8"(460)[2] 48 1/8"(1222)	18 1/8"(460)[2] 60 1/8"(1527)

44 15/16"(1141) 46 7/8"(1180) 42 3/4"(1086) 42"(1067) 36 1/8"(918)			
	SWCPF4242-24 SWPOCPF4242-24	SWCPF5442-24 SWPOCPF5442-24	SWCPF6642-24 SWPOCPF6642-24
50 15/16"(1294) 52 1/8"(1332) 48 3/4"(1239) 48"(1219) 42 1/8"(1070)			
	SWCPF4248-24 SWPOCPF4248-24	SWCPF5448-24 SWPOCPF5448-24	SWCPF6648-24 SWPOCPF6648-24
56 15/16"(1446) 58 7/8"(1484) 54 3/4"(1391) 54"(1372) 48 1/8"(1222)			
	SWCPF4254-24 SWPOCPF4254-24	SWCPF5454-24 SWPOCPF5454-24	SWCPF6654-24 SWPOCPF6654-24
62 15/16"(1599) 64 7/8"(1637) 60 3/4"(1543) 60"(1524) 54 1/8"(1375)			
	SWCPF4260-24 SWPOCPF4260-24	SWCPF5460-24 SWPOCPF5460-24	SWCPF6660-24 SWPOCPF6660-24
68 15/16"(1751) 70 7/8"(1789) 66 3/4"(1695) 66"(1676) 60 1/8"(1527)			
	SWCPF4266-24 SWPOCPF4266-24	SWCPF5466-24 SWPOCPF5466-24	SWCPF6666-24 SWPOCPF6666-24











ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
 ## NUMBER INDICATES PREFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE WITH 28" FLANKER ELEVATIONS

MO BRICKMOLD	101 1/2"(2578)	113 1/2"(2883)
MO FLAT CASING	104 1/2"(2654)	116 1/2"(2959)
ROUGH OPENING	98 3/4"(2508)	110 3/4"(2813)
FRAME SIZE	98"(2489)	110"(2794)
DAYLIGHT OPENING	22 1/8"(562)[2]	22 1/8"(562)[2]
	36 1/8"(918)	48 1/8"(1222)

44 15/16"(1141) 46 7/16"(1180) 42 3/4"(1086) 42"(1067) 36 1/8"(918)		
	SWCPF4242-28 SWPOCPF4242-28	SWCPF5442-28 SWPOCPF5442-28
50 15/16"(1294) 52 7/16"(1332) 48 3/4"(1238) 48"(1219) 42 1/8"(1070)		
	SWCPF4248-28 SWPOCPF4248-28	SWCPF5448-28 SWPOCPF5448-28
56 15/16"(1446) 58 7/16"(1484) 54 3/4"(1391) 54"(1372) 48 1/8"(1222)		
	SWCPF4254-28 SWPOCPF4254-28	SWCPF5454-28 SWPOCPF5454-28
62 15/16"(1599) 64 7/16"(1637) 60 3/4"(1543) 60"(1524) 54 1/8"(1375)		
	SWCPF4260-28 SWPOCPF4260-28	SWCPF5460-28 SWPOCPF5460-28
68 15/16"(1751) 70 7/16"(1789) 66 3/4"(1695) 66"(1676) 60 1/8"(1527)		
	SWCPF4266-28 SWPOCPF4266-28	SWCPF5466-28 SWPOCPF5466-28

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE WITH 30" FLANKER ELEVATIONS

MO BRICKMOLD	105 1/2"(2680)	117 1/2"(2985)
MO FLAT CASING	108 1/2"(2756)	120 1/2"(3061)
ROUGH OPENING	102 3/4"(2610)	114 3/4"(2915)
FRAME SIZE	102"(2590)	114"(2896)
DAYLIGHT OPENING	24 1/8"(613)[2] 36 1/8"(918)	24 1/8"(613)[2] 48 1/8"(1222)

44 15/16"(1141) 46 7/8"(1180) 42 3/4"(1086) 42"(1067) 36 1/8"(918)		
	SWCPF4242-30 SWPOCPF4242-30	SWCPF5442-30 SWPOCPF5442-30
50 15/16"(1294) 52 1/8"(1332) 48 3/4"(1239) 48"(1219) 42 1/8"(1070)		
	SWCPF4248-30 SWPOCPF4248-30	SWCPF5448-30 SWPOCPF5448-30
56 15/16"(1446) 58 7/8"(1484) 54 1/2"(1371) 54"(1372) 48 1/8"(1222)		
	SWCPF4254-30 SWPOCPF4254-30	SWCPF5454-30 SWPOCPF5454-30
62 15/16"(1599) 64 7/8"(1637) 60 3/4"(1543) 60"(1524) 54 1/8"(1375)		
	SWCPF4260-30 SWPOCPF4260-30	SWCPF5460-30 SWPOCPF5460-30
68 15/16"(1751) 70 7/8"(1789) 66 3/4"(1695) 66"(1676) 60 1/8"(1527)		
	SWCPF4266-30 SWPOCPF4266-30	SWCPF5466-30 SWPOCPF5466-30

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS

Note: Elevations shown DO NOT have exterior trim. Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.