



TABLE OF CONTENTS

Elevations

Single Units	2
Twin Units	5
3 Wide Units.....	7
4 Wide Units.....	11
5 Wide Units.....	15
Picture Units.....	19
Sector Top Units	26
2 Wide Sector Top Units	29
3 Wide Sector Top Units	31
Picture with 18" Flanker.....	35
Picture with 20" Flanker.....	36
Picture with 24" Flanker.....	37
Picture with 28" Flanker.....	38
Picture with 30" Flanker.....	39

Note:

Elevations shown DO NOT have exterior trim.

Subtract 3/4"(19) from M.O.(Masonry Opening) for Unit Sizes.

Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications.

For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.



SINGLE UNITS

M.O. BRICKMOULD	21 1/2"(546)	23 1/2"(597)	27 1/2"(699)	31 1/2"(800)	33 1/2"(851)	35 1/2"(902)	39 1/2"(1003)
M.O. ADAMS/FLAT CASING	24 1/2"(622)	26 1/2"(673)	30 1/2"(775)	34 1/2"(876)	36 1/2"(927)	38 1/2"(978)	42 1/2"(1080)
ROUGH OPENING	18 3/4"(476)	20 3/4"(527)	24 3/4"(629)	28 3/4"(730)	30 3/4"(781)	32 3/4"(832)	36 3/4"(933)
FRAME SIZE	18"(457)	20"(508)	24"(610)	28"(711)	30"(762)	32"(813)	36"(914)
DAYLIGHT OPENING	12 1/8"(308)	14 1/8"(359)	18 1/8"(460)	22 1/8"(562)	24 1/8"(613)	26 1/8"(664)	30 1/8"(765)
14 15/16"(379) 16 7/16"(418) 12 3/4"(324) 12"(305) 6 1/8"(156)							
20 15/16"(532) 22 7/16"(570) 18 3/4"(476) 18"(508) 12 1/8"(308)							
22 15/16"(583) 24 7/16"(621) 20 3/4"(527) 20"(508) 14 1/8"(359)							
26 15/16"(684) 28 7/16"(722) 24 3/4"(629) 24"(610) 18 1/8"(460)							
30 15/16"(786) 32 7/16"(824) 28 3/4"(730) 28"(711) 22 1/8"(562)							
32 15/16"(837) 34 7/16"(875) 30 3/4"(781) 30"(762) 24 1/8"(613)							
38 15/16"(989) 40 7/16"(1027) 36 3/4"(933) 36"(914) 30 1/8"(765)							
44 15/16"(1141) 46 7/16"(1180) 42 3/4"(1086) 42"(1067) 36 1/8"(918)							

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
- S STATIONARY UNITS ONLY



SINGLE UNITS

M.O. BRICKMOUND	21 1/2"(546)	23 1/2"(597)	27 1/2"(699)	31 1/2"(800)	33 1/2"(851)	35 1/2"(902)	39 1/2"(1003)
M.O. ADAMS/FLAT CASING	24 1/2"(622)	26 1/2"(673)	30 1/2"(775)	34 1/2"(876)	36 1/2"(927)	38 1/2"(978)	42 1/2"(1080)
ROUGH OPENING	18 3/4"(476)	20 3/4"(527)	24 3/4"(629)	28 3/4"(730)	30 3/4"(781)	32 3/4"(832)	36 3/4"(933)
FRAME SIZE	18"(457)	20"(508)	24"(610)	28"(711)	30"(762)	32"(813)	36"(914)
DAYLIGHT OPENING	12 1/8"(308)	14 1/8"(359)	18 1/8"(460)	22 1/8"(562)	24 1/8"(613)	26 1/8"(664)	30 1/8"(765)

50 15/16"(1294) 52 7/16"(1332) 48 3/4"(1238) 48"(1219) 42 1/8"(1070)								
	SWC1848	SWC2048	SWC2448	SWC2848	SWC3048	SWC3248	SWC3648	
	SWPOC1848	SWPOC2048	SWPOC2448	SWPOC2848	SWPOC3048	SWPOC3248	SWPOC3648	
	56 15/16"(1446) 58 7/16"(1484) 54 3/4"(1381) 54"(1372) 48 1/8"(1222)							
		SWC1854	SWC2054	SWC2454	SWC2854	SWC3054	SWC3254	SWC3654
		SWPOC1854	SWPOC2054	SWPOC2454	SWPOC2854	SWPOC3054	SWPOC3254	SWPOC3654
		62 15/16"(1599) 64 7/16"(1637) 60 3/4"(1543) 60"(1524) 54 1/8"(1375)						
SWC1860			SWC2060	SWC2460	SWC2860	SWC3060	SWC3260	SWC3660
SWPOC1860			SWPOC2060	SWPOC2460	SWPOC2860	SWPOC3060	SWPOC3260	SWPOC3660
68 15/16"(1751) 70 7/16"(1789) 66 3/4"(1695) 66"(1676) 60 7/8"(1527)								
	SWC1866		SWC2066	SWC2466	SWC2866	SWC3066	SWC3266	SWC3666
	SWPOC1866		SWPOC2066	SWPOC2466	SWPOC2866	SWPOC3066	SWPOC3266	SWPOC3666
	74 15/16"(1903) 76 7/16"(1942) 72 3/4"(1848) 72"(1829) 66 1/8"(1680)							
		SWC1872	SWC2072	SWC2472	SWC2872	SWC3072	SWC3272	SWC3672
		SWPOC1872	SWPOC2072	SWPOC2472	SWPOC2872	SWPOC3072	SWPOC3272	SWPOC3672

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS


E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
S STATIONARY UNITS ONLY



SINGLE UNITS


M.O. BRICKMOUND	21 1/2"(546)	23 1/2"(597)	27 1/2"(699)	31 1/2"(800)	33 1/2"(851)	35 1/2"(902)	39 1/2"(1003)
M.O. ADAMS/FLAT CASING	24 1/2"(622)	26 1/2"(673)	30 1/2"(775)	34 1/2"(876)	36 1/2"(927)	38 1/2"(978)	42 1/2"(1080)
ROUGH OPENING	18 3/4"(476)	20 3/4"(527)	24 3/4"(629)	28 3/4"(730)	30 3/4"(781)	32 3/4"(832)	36 3/4"(933)
FRAME SIZE	18"(457)	20"(508)	24"(610)	28"(711)	30"(762)	32"(813)	36"(914)
DAYLIGHT OPENING	12 1/8"(308)	14 1/8"(359)	18 1/8"(460)	22 1/8"(562)	24 1/8"(613)	26 1/8"(664)	30 1/8"(765)

80 15/16"(2056)
82 7/16"(2094)
78 3/4"(2000)
76"(1981)
72 1/8"(1832)

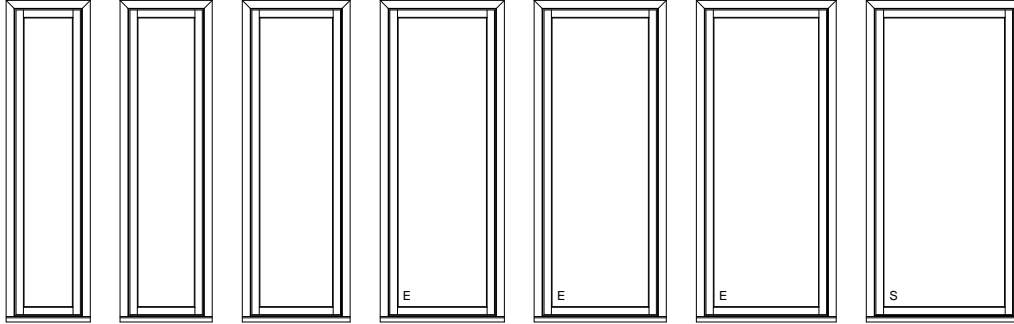


SWC1878 SWPOC1878	SWC2078 SWPOC2078	SWC2478 SWPOC2478	SWC2878 SWPOC2878	SWC3078 SWPOC3078	SWC3278 SWPOC3278	SWC3678 SWPOC3678
----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------

86 15/16"(2208)
88 7/16"(2246)
84 3/4"(2153)
84"(2134)
78 1/8"(1984)

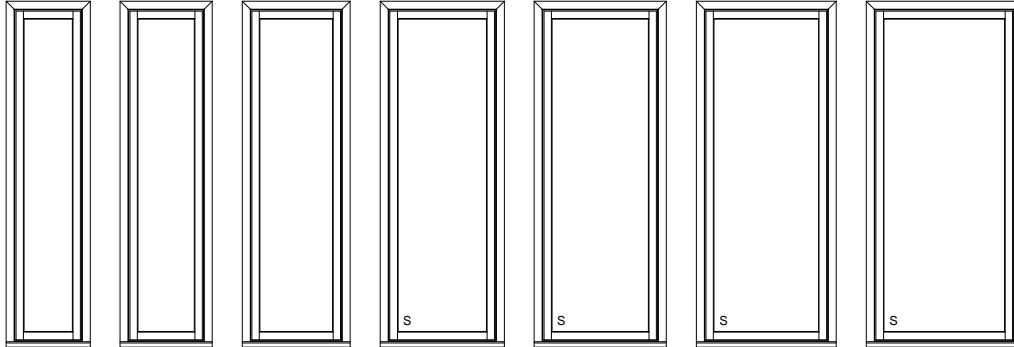

SWC1884 SWPOC1884	SWC2084 SWPOC2084	SWC2484 SWPOC2484	SWC2884 SWPOC2884	SWC3084 SWPOC3084	SWC3284 SWPOC3284	SWC3684 SWPOC3684
----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------

98 15/16"(2513)
100 7/16"(2551)
96 3/4"(2457)
96"(2438)
90 1/8"(2289)

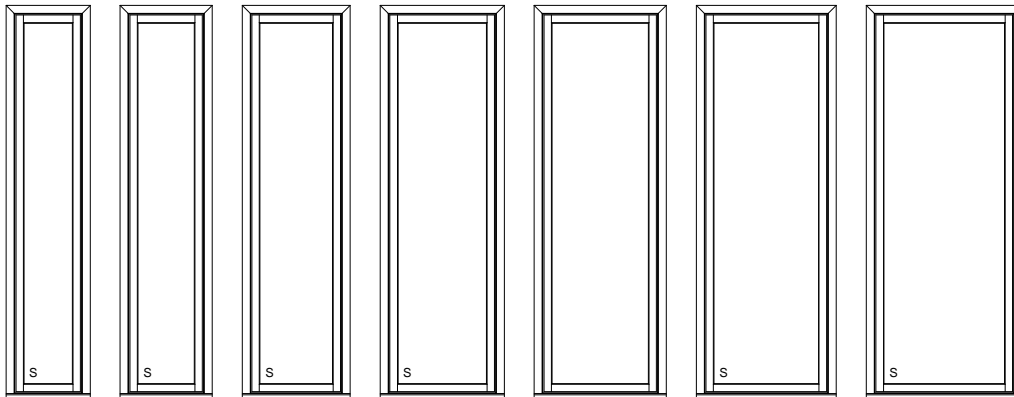

SWC1896 SWPOC1896	SWC2096 SWPOC2096	SWC2496 SWPOC2496	SWC2896 SWPOC2896	SWC3096 SWPOC3096	SWC3296 SWPOC3296	SWC3696 SWPOC3696
----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
- S STATIONARY UNITS ONLY



TWIN UNITS

MO BRICKMOLD	39 1/2"(1003)	43 1/2"(1105)	51 1/2"(1308)	59 1/2"(1511)	63 1/2"(1613)	67 1/2"(1715)	75 1/2"(1918)
MO FLAT CASING	42 1/2"(1080)	46 1/2"(1181)	54 1/2"(1384)	62 1/2"(1588)	66 1/2"(1689)	70 1/2"(1791)	78 1/2"(1994)
ROUGH OPENING	36 3/4"(933)	40 3/4"(1035)	48 3/4"(1238)	56 3/4"(1441)	60 3/4"(1543)	64 3/4"(1645)	72 3/4"(1848)
FRAME SIZE	36"(914)	40"(1016)	48"(1219)	56"(1422)	60"(1524)	64"(1626)	72"(1829)
DAYLIGHT OPENING	12 1/8"(308)[2]	14 1/8"(359)[2]	18 1/8"(460)[2]	22 1/8"(562)[2]	24 1/8"(613)[2]	26 1/8"(664)[2]	30 1/8"(765)[2]
14 15/16"(379) 16 7/16"(418) 12 7/16"(324) 6 1/8"(156)	 SWC1812-2 SWPOC1812-2	 SWC2012-2 SWPOC2012-2	 SWC2412-2 SWPOC2412-2	 SWC2812-2 SWPOC2812-2	 SWC3012-2 SWPOC3012-2	 SWC3212-2 SWPOC3212-2	 SWC3612-2 SWPOC3612-2
20 15/16"(532) 22 7/16"(570) 19 3/4"(496) 12 1/8"(308)	 SWC1818-2 SWPOC1818-2	 SWC2018-2 SWPOC2018-2	 SWC2418-2 SWPOC2418-2	 SWC2818-2 SWPOC2818-2	 SWC3018-2 SWPOC3018-2	 SWC3218-2 SWPOC3218-2	 SWC3618-2 SWPOC3618-2
22 15/16"(583) 24 7/16"(621) 20 3/4"(527) 14 1/8"(359)	 SWC1820-2 SWPOC1820-2	 SWC2020-2 SWPOC2020-2	 SWC2420-2 SWPOC2420-2	 SWC2820-2 SWPOC2820-2	 SWC3020-2 SWPOC3020-2	 SWC3220-2 SWPOC3220-2	 SWC3620-2 SWPOC3620-2
26 15/16"(684) 28 7/16"(722) 24 3/4"(628) 18 1/8"(460)	 SWC1824-2 SWPOC1824-2	 SWC2024-2 SWPOC2024-2	 SWC2424-2 SWPOC2424-2	 SWC2824-2 SWPOC2824-2	 SWC3024-2 SWPOC3024-2	 SWC3224-2 SWPOC3224-2	 SWC3624-2 SWPOC3624-2
30 15/16"(786) 32 7/16"(824) 28 3/4"(730) 22 1/8"(562)	 SWC1828-2 SWPOC1828-2	 SWC2028-2 SWPOC2028-2	 SWC2428-2 SWPOC2428-2	 SWC2828-2 SWPOC2828-2	 SWC3028-2 SWPOC3028-2	 SWC3228-2 SWPOC3228-2	 SWC3628-2 SWPOC3628-2
32 15/16"(837) 34 1/16"(875) 30 3/4"(781) 24 1/8"(613)	 SWC1830-2 SWPOC1830-2	 SWC2030-2 SWPOC2030-2	 SWC2430-2 SWPOC2430-2	 SWC2830-2 SWPOC2830-2	 SWC3030-2 SWPOC3030-2	 SWC3230-2 SWPOC3230-2	 SWC3630-2 SWPOC3630-2
38 15/16"(989) 40 7/16"(1027) 36 3/4"(833) 30 1/8"(765)	 SWC1836-2 SWPOC1836-2	 SWC2036-2 SWPOC2036-2	 SWC2436-2 SWPOC2436-2	 SWC2836-2 SWPOC2836-2	 SWC3036-2 SWPOC3036-2	 SWC3236-2 SWPOC3236-2	 SWC3636-2 SWPOC3636-2
44 15/16"(1141) 46 7/16"(1180) 42 3/4"(1086) 36 1/8"(918)	 SWC1842-2 SWPOC1842-2	 SWC2042-2 SWPOC2042-2	 SWC2442-2 SWPOC2442-2	 SWC2842-2 SWPOC2842-2	 SWC3042-2 SWPOC3042-2	 SWC3242-2 SWPOC3242-2	 SWC3642-2 SWPOC3642-2
50 15/16"(1294) 52 7/16"(1332) 48 3/4"(1238) 42 1/8"(1070)	 SWC1848-2 SWPOC1848-2	 SWC2048-2 SWPOC2048-2	 SWC2448-2 SWPOC2448-2	 SWC2848-2 SWPOC2848-2	 SWC3048-2 SWPOC3048-2	 SWC3248-2 SWPOC3248-2	 SWC3648-2 SWPOC3648-2
56 15/16"(1446) 58 7/16"(1484) 54 3/4"(1391) 48 1/8"(1222)	 SWC1854-2 SWPOC1854-2	 SWC2054-2 SWPOC2054-2	 SWC2454-2 SWPOC2454-2	 SWC2854-2 SWPOC2854-2	 SWC3054-2 SWPOC3054-2	 SWC3254-2 SWPOC3254-2	 SWC3654-2 SWPOC3654-2
62 15/16"(1599) 64 7/16"(1637) 60 3/4"(1543) 54 1/8"(1375)	 SWC1860-2 SWPOC1860-2	 SWC2060-2 SWPOC2060-2	 SWC2460-2 SWPOC2460-2	 SWC2860-2 SWPOC2860-2	 SWC3060-2 SWPOC3060-2	 SWC3260-2 SWPOC3260-2	 SWC3660-2 SWPOC3660-2






















ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS



TWIN UNITS

MO BRICKMOLD	39 1/2"(1003)	43 1/2"(1105)	51 1/2"(1308)	59 1/2"(1511)	63 1/2"(1613)	67 1/2"(1715)	75 1/2"(1918)
MO FLAT CASING	42 1/2"(1080)	46 1/2"(1181)	54 1/2"(1384)	62 1/2"(1588)	66 1/2"(1689)	70 1/2"(1791)	78 1/2"(1994)
ROUGH OPENING	36 3/4"(933)	40 3/4"(1035)	48 3/4"(1238)	56 3/4"(1441)	60 3/4"(1543)	64 3/4"(1645)	72 3/4"(1848)
FRAME SIZE	36"(914)	40"(1016)	48"(1219)	56"(1422)	60"(1524)	64"(1626)	72"(1829)
DAYLIGHT OPENING	12 1/8"(308)[2]	14 1/8"(359)[2]	18 1/8"(460)[2]	22 1/8"(562)[2]	24 1/8"(613)[2]	26 1/8"(664)[2]	30 1/8"(765)[2]

68 15/16"(1751) 70 7/16"(1789) 66 3/4"(1695) 66"(1676) 60 1/8"(1527)	 SWC1866-2 SWPOC1866-2	 SWC2066-2 SWPOC2066-2	 SWC2466-2 SWPOC2466-2	 SWC2866-2 SWPOC2866-2	 SWC3066-2 SWPOC3066-2	 SWC3266-2 SWPOC3266-2	 SWC3666-2 SWPOC3666-2
74 15/16"(1903) 76 7/16"(1942) 72 3/4"(1848) 72"(1829) 66 1/8"(1680)	 SWC1872-2 SWPOC1872-2	 SWC2072-2 SWPOC2072-2	 SWC2472-2 SWPOC2472-2	 SWC2872-2 SWPOC2872-2	 SWC3072-2 SWPOC3072-2	 SWC3272-2 SWPOC3272-2	 SWC3672-2 SWPOC3672-2
80 15/16"(2056) 82 7/16"(2094) 78 3/4"(2000) 78"(1981) 72 1/8"(1832)	 SWC1878-2 SWPOC1878-2	 SWC2078-2 SWPOC2078-2	 SWC2478-2 SWPOC2478-2	 SWC2878-2 SWPOC2878-2	 SWC3078-2 SWPOC3078-2	 SWC3278-2 SWPOC3278-2	 SWC3678-2 SWPOC3678-2

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS



3 WIDE UNITS

MO BRICKMOLD	57 1/2"(1461)	63 1/2"(1613)	75 1/2"(1918)	87 1/2"(2223)	93 1/2"(2375)
MO FLAT CASING	60 1/2"(1537)	66 1/2"(1689)	78 1/2"(1994)	90 1/2"(2299)	96 1/2"(2451)
ROUGH OPENING	54 3/4"(1391)	60 3/4"(1543)	72 3/4"(1238)	84 3/4"(2153)	90 3/4"(2305)
FRAME SIZE	54"(1372)	60"(1524)	72"(1219)	84"(2134)	90"(2286)
DAYLIGHT OPENING	12 1/8"(308)[3]	14 1/8"(359)[3]	18 1/8"(460)[3]	22 1/8"(562)[3]	24 1/8"(613)[3]
14 15/16"(379) 16 7/16"(418) 12 3/4"(324) 12"(305) 6 1/8"(156)					
20 15/16"(532) 22 7/16"(570) 18 3/4"(476) 18"(457) 12 1/8"(308)					
22 15/16"(583) 24 7/16"(621) 20 3/4"(527) 20"(508) 14 1/8"(359)					
26 15/16"(684) 28 7/16"(722) 24 3/4"(628) 24"(610) 18 1/8"(460)					
30 15/16"(785) 32 7/16"(823) 28 3/4"(730) 28"(711) 22 1/8"(562)					
32 15/16"(837) 34 7/16"(875) 30 3/4"(781) 30"(763) 24 1/8"(613)					
38 15/16"(989) 40 7/16"(1027) 36 3/4"(933) 36"(914) 30 1/8"(765)					
44 15/16"(1141) 46 7/16"(1180) 42 3/4"(1086) 42"(1067) 36 1/8"(918)					
50 15/16"(1294) 52 7/16"(1332) 48 3/4"(1238) 48"(1219) 42 1/8"(1070)					
56 15/16"(1446) 58 7/16"(1484) 54 3/4"(1391) 54"(1372) 48 1/8"(1222)					
62 15/16"(1599) 64 7/16"(1637) 60 3/4"(1543) 60"(1524) 54 1/8"(1375)					

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS



3 WIDE UNITS

MO BRICKMOLD	57 1/2"(1461)	63 1/2"(1613)	75 1/2"(1918)	87 1/2"(2223)	93 1/2"(2375)
MO FLAT CASING	60 1/2"(1537)	66 1/2"(1689)	78 1/2"(1994)	90 1/2"(2299)	96 1/2"(2451)
ROUGH OPENING	54 3/4"(1391)	60 3/4"(1543)	72 3/4"(1238)	84 3/4"(2153)	90 3/4"(2305)
FRAME SIZE	54"(1372)	60"(1524)	72"(1219)	84"(2134)	90"(2286)
DAYLIGHT OPENING	12 1/8"(308)[3]	14 1/8"(359)[3]	18 1/8"(460)[3]	22 1/8"(562)[3]	24 1/8"(613)[3]

68 15/16"(1751) 70 1/4"(1769) 68 3/4"(1695) 66 1/8"(1576) 60 1/8"(1527)					
	SWC1866-3 SWPOC1866-3	SWC2066-3 SWPOC2066-3	SWC2466-3 SWPOC2466-3	SWC2866-3 SWPOC2866-3	SWC3066-3 SWPOC3066-3
74 15/16"(1903) 76 1/4"(1921) 74 3/4"(1847) 72 1/2"(1829) 66 1/8"(1680)					
	SWC1872-3 SWPOC1872-3	SWC2072-3 SWPOC2072-3	SWC2472-3 SWPOC2472-3	SWC2872-3 SWPOC2872-3	SWC3072-3 SWPOC3072-3
80 15/16"(2056) 82 1/4"(2074) 80 3/4"(2000) 78 1/2"(1982) 72 1/8"(1832)					
	SWC1878-3 SWPOC1878-3	SWC2078-3 SWPOC2078-3	SWC2478-3 SWPOC2478-3	SWC2878-3 SWPOC2878-3	SWC3078-3 SWPOC3078-3

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS



3 WIDE UNITS

MO BRICKMOLD	99 1/2"(2527)	111 1/2"(2832)
MO FLAT CASING	102 1/2"(2604)	114 1/2"(2908)
ROUGH OPENING	96 3/4"(2457)	108 3/4"(2762)
FRAME SIZE	96"(2438)	108"(2743)
DAYLIGHT OPENING	26 1/8"(664)[3]	30 1/8"(765)[3]
14 15/16"(378) 16 7/16"(416) 12 3/4"(324) 12 1/2"(318) 6 1/8"(156)	 SWC3212-3 SWPOC3212-3	 SWC3612-3 SWPOC3612-3
20 15/16"(532) 22 7/16"(570) 18 3/4"(476) 18 1/2"(467) 12 1/8"(308)	 SWC3218-3 SWPOC3218-3	 SWC3618-3 SWPOC3618-3
23 15/16"(603) 24 7/16"(621) 20 3/4"(527) 20 1/2"(518) 14 1/8"(359)	 SWC3220-3 SWPOC3220-3	 SWC3620-3 SWPOC3620-3
28 15/16"(684) 28 7/16"(722) 24 3/4"(628) 24 1/2"(619) 18 1/8"(460)	 SWC3224-3 SWPOC3224-3	 SWC3624-3 SWPOC3624-3
30 15/16"(766) 32 7/16"(804) 28 3/4"(730) 28 1/2"(721) 22 1/8"(562)	 SWC3228-3 SWPOC3228-3	 SWC3628-3 SWPOC3628-3
32 15/16"(837) 34 7/16"(875) 30 3/4"(781) 30 1/2"(772) 24 1/8"(613)	 SWC3230-3 SWPOC3230-3	 SWC3630-3 SWPOC3630-3
38 15/16"(989) 40 7/16"(1027) 36 3/4"(933) 36 1/2"(924) 30 1/8"(765)	 SWC3236-3 SWPOC3236-3	 SWC3636-3 SWPOC3636-3
44 15/16"(1141) 46 7/16"(1180) 42 3/4"(1086) 42 1/2"(1077) 36 1/8"(916)	 SWC3242-3 SWPOC3242-3	 SWC3642-3 SWPOC3642-3
50 15/16"(1294) 52 7/16"(1332) 48 3/4"(1238) 48 1/2"(1229) 42 1/8"(1070)	 SWC3248-3 SWPOC3248-3	 SWC3648-3 SWPOC3648-3
56 15/16"(1446) 58 7/16"(1484) 54 3/4"(1391) 54 1/2"(1382) 48 1/8"(1222)	 SWC3254-3 SWPOC3254-3	 SWC3654-3 SWPOC3654-3
62 15/16"(1599) 64 7/16"(1637) 60 3/4"(1543) 60 1/2"(1534) 54 1/8"(1375)	 SWC3260-3 SWPOC3260-3	 SWC3660-3 SWPOC3660-3


ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS



3 WIDE UNITS

MO BRICKMOLD	99 1/2"(2527)	111 1/2"(2832)
MO FLAT CASING	102 1/2"(2604)	114 1/2"(2908)
ROUGH OPENING	96 3/4"(2457)	108 3/4"(2762)
FRAME SIZE	96"(2438)	108"(2743)
DAYLIGHT OPENING	26 1/8"(664)[3]	30 1/8"(765)[3]

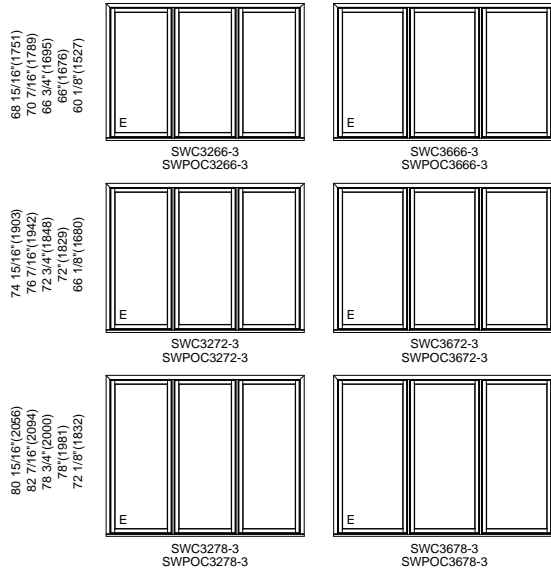

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS



4 WIDE UNITS

	MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	75 1/2"(1918) 78 1/2"(1994) 72 3/4"(1238) 72"(1219) 12 1/8"(308)[4]	83 1/2"(2121) 86 1/2"(2197) 80 3/4"(2051) 80"(2032) 14 1/8"(359)[4]	99 1/2"(2527) 102 1/2"(2604) 96 3/4"(2457) 96"(2438) 18 1/8"(460)[4]	115 1/2"(2934) 118 1/2"(3010) 112 3/4"(2864) 112"(2849) 22 1/8"(562)[4]	123 1/2"(3137) 126 1/2"(3213) 120 3/4"(3067) 120"(3048) 24 1/8"(613)[4]
14 15/16"(379)						
15 1/16"(382)						
15 3/16"(392)						
15 5/16"(398)						
15 7/16"(404)						
15 9/16"(410)						
15 11/16"(416)						
15 13/16"(422)						
15 15/16"(428)						
16 1/16"(434)						
16 3/16"(440)						


ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS



4 WIDE UNITS

MO BRICKMOLD	75 1/2"(1918)	83 1/2"(2121)	99 1/2"(2527)	115 1/2"(2934)	123 1/2"(3137)
MO FLAT CASING	78 1/2"(1994)	86 1/2"(2197)	102 1/2"(2604)	118 1/2"(3010)	126 1/2"(3213)
ROUGH OPENING	72 3/4"(1238)	80 3/4"(2051)	96 3/4"(2457)	112 3/4"(2864)	120 3/4"(3067)
FRAME SIZE	72"(1219)	80"(2032)	96"(2438)	112"(2849)	120"(3048)
DAYLIGHT OPENING	12 1/8"(308)[4]	14 1/8"(359)[4]	18 1/8"(460)[4]	22 1/8"(562)[4]	24 1/8"(613)[4]

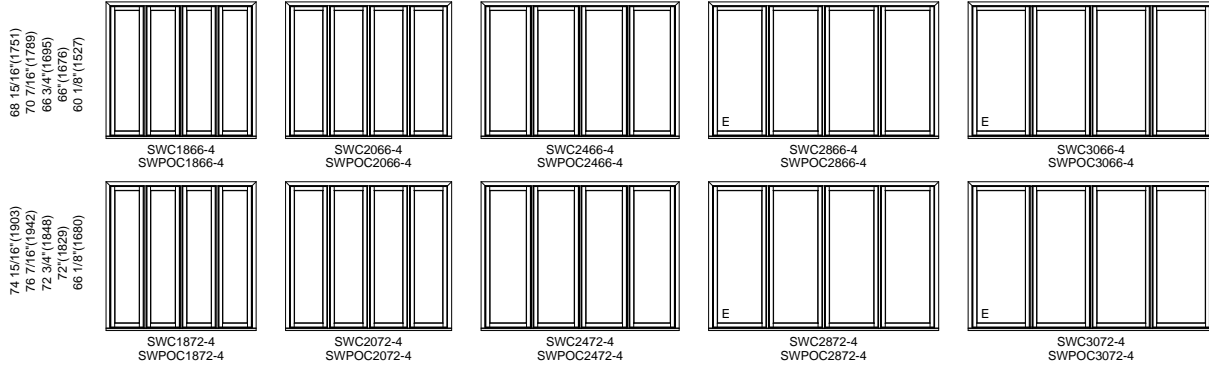

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS



4 WIDE UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

131 1/2"(3340)
134 1/2"(3416)
128 3/4"(3270)
128"(3251)
26 1/8"(664)[4]

147 1/2"(3747)
150 1/2"(3823)
144 3/4"(3678)
144"(3658)
30 1/8"(765)[4]

14 1/16"(379)
15 1/8"(396)
16 3/4"(424)
12 3/4"(324)

20 15/16"(532)
21 1/16"(540)
22 7/16"(570)
18 3/4"(476)

22 1/8"(568)
20 5/8"(527)
18 1/2"(468)
12 1/8"(308)

22 1/8"(568)
20 5/8"(527)
18 1/2"(468)
12 1/8"(308)

22 1/8"(568)
20 5/8"(527)
18 1/2"(468)
12 1/8"(308)

22 1/8"(568)
20 5/8"(527)
18 1/2"(468)
12 1/8"(308)

22 1/8"(568)
20 5/8"(527)
18 1/2"(468)
12 1/8"(308)

22 1/8"(568)
20 5/8"(527)
18 1/2"(468)
12 1/8"(308)

22 1/8"(568)
20 5/8"(527)
18 1/2"(468)
12 1/8"(308)

22 1/8"(568)
20 5/8"(527)
18 1/2"(468)
12 1/8"(308)

22 1/8"(568)
20 5/8"(527)
18 1/2"(468)
12 1/8"(308)

22 1/8"(568)
20 5/8"(527)
18 1/2"(468)
12 1/8"(308)

22 1/8"(568)
20 5/8"(527)
18 1/2"(468)
12 1/8"(308)

22 1/8"(568)
20 5/8"(527)
18 1/2"(468)
12 1/8"(308)

22 1/8"(568)
20 5/8"(527)
18 1/2"(468)
12 1/8"(308)

22 1/8"(568)
20 5/8"(527)
18 1/2"(468)
12 1/8"(308)

22 1/8"(568)
20 5/8"(527)
18 1/2"(468)
12 1/8"(308)

22 1/8"(568)
20 5/8"(527)
18 1/2"(468)
12 1/8"(308)

22 1/8"(568)
20 5/8"(527)
18 1/2"(468)
12 1/8"(308)

22 1/8"(568)
20 5/8"(527)
18 1/2"(468)
12 1/8"(308)

22 1/8"(568)
20 5/8"(527)
18 1/2"(468)
12 1/8"(308)

22 1/8"(568)
20 5/8"(527)
18 1/2"(468)
12 1/8"(308)

22 1/8"(568)
20 5/8"(527)
18 1/2"(468)
12 1/8"(308)

22 1/8"(568)
20 5/8"(527)
18 1/2"(468)
12 1/8"(308)

22 1/8"(568)
20 5/8"(527)
18 1/2"(468)
12 1/8"(308)

22 1/8"(568)
20 5/8"(527)
18 1/2"(468)
12 1/8"(308)

22 1/8"(568)
20 5/8"(527)
18 1/2"(468)
12 1/8"(308)

22 1/8"(568)
20 5/8"(527)
18 1/2"(468)
12 1/8"(308)

22 1/8"(568)
20 5/8"(527)
18 1/2"(468)
12 1/8"(308)

22 1/8"(568)
20 5/8"(527)
18 1/2"(468)
12 1/8"(308)

22 1/8"(568)
20 5/8"(527)
18 1/2"(468)
12 1/8"(308)



SWC3212-4
SWPOC3212-4




SWC3612-4
SWPOC3612-4



SWC3218-4
SWPOC3218-4



SWC3618-4
SWPOC3618-4



SWC3220-4
SWPOC3220-4



SWC3620-4
SWPOC3620-4



SWC3224-4
SWPOC3224-4



SWC3624-4
SWPOC3624-4



SWC3228-4
SWPOC3228-4




SWC3628-4
SWPOC3628-4




SWC3230-4
SWPOC3230-4



SWC3630-4
SWPOC3630-4



SWC3236-4
SWPOC3236-4




SWC3636-4
SWPOC3636-4




SWC3242-4
SWPOC3242-4




SWC3642-4
SWPOC3642-4




SWC3248-4
SWPOC3248-4




SWC3648-4
SWPOC3648-4




SWC3254-4
SWPOC3254-4



SWC3654-4
SWPOC3654-4



SWC3260-4
SWPOC3260-4



SWC3660-4
SWPOC3660-4

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS




4 WIDE UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


131 1/2"(3340)
134 1/2"(3416)
128 3/4"(3270)
128"(3251)
26 1/8"(664)[4]

147 1/2"(3747)
150 1/2"(3823)
144 3/4"(3678)
144"(3658)
30 1/8"(765)[4]

68 15/16"(1751)
70 1/2"(1780)
70 3/4"(1805)
66"(1676)
60 1/8"(1527)




SWC3266-4
SWPOC3266-4




SWC3666-4
SWPOC3666-4

74 15/16"(1903)
75 1/2"(1922)
75 3/4"(1946)
72"(1829)
66 1/8"(1680)



SWC3272-4
SWPOC3272-4



SWC3672-4
SWPOC3672-4

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS



5 WIDE UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

93 1/2"(2375)
96 1/2"(2451)
90 3/4"(2305)
90"(2286)
12 1/8"(308)[5]

103 1/2"(2629)
106 1/2"(2705)
100 3/4"(2559)
100"(2540)
14 1/8"(359)[5]

123 1/2"(3137)
126 1/2"(3213)
120 3/4"(3067)
120"(3048)
18 1/8"(460)[5]

143 1/2"(3645)
146 1/2"(3721)
140 3/4"(3575)
140"(3556)
22 1/8"(562)[5]

14 15/16"(379)
16 7/16"(419)
12 3/4"(324)
18 1/4"(466)
19 1/4"(496)
12 7/16"(308)
20 15/16"(532)
22 7/16"(570)
23 1/4"(596)
19 1/4"(496)
12 7/8"(308)
22 15/16"(583)
24 7/16"(621)
25 3/8"(627)
25 3/8"(627)
14 1/8"(359)
26 15/16"(684)
28 7/16"(722)
29 1/4"(728)
24 1/4"(616)
18 1/8"(460)
30 15/16"(796)
32 7/16"(834)
33 1/4"(830)
29 3/8"(731)
22 1/8"(562)
32 15/16"(837)
34 7/16"(875)
35 3/8"(871)
30 1/8"(765)
24 1/8"(613)
38 15/16"(989)
40 7/16"(1027)
41 1/4"(1033)
36 1/8"(918)
30 1/8"(765)
44 15/16"(1141)
46 7/16"(1180)
42 3/4"(1088)
42 3/4"(1088)
36 1/8"(918)
50 15/16"(1294)
52 7/16"(1332)
48 3/4"(1238)
48 1/2"(1219)
42 1/8"(1070)
56 15/16"(1446)
58 7/16"(1484)
54 3/4"(1391)
54 1/2"(1372)
48 1/8"(1222)
62 15/16"(1599)
64 7/16"(1637)
60 3/4"(1543)
60 1/2"(1524)
54 1/8"(1375)


ELEVATION SYMBOL LEGEND:
M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS




5 WIDE UNITS

MO BRICKMOLD	93 1/2"(2375)	103 1/2"(2629)	123 1/2"(3137)	143 1/2"(3645)
MO FLAT CASING	96 1/2"(2451)	106 1/2"(2705)	126 1/2"(3213)	146 1/2"(3721)
ROUGH OPENING	90 3/4"(2305)	100 3/4"(2559)	120 3/4"(3067)	140 3/4"(3575)
FRAME SIZE	90"(2286)	100"(2540)	120"(3048)	140"(3556)
DAYLIGHT OPENING	12 1/8"(308)[5]	14 1/8"(359)[5]	18 1/8"(460)[5]	22 1/8"(562)[5]


68 15/16"(1751)
70 7/16"(1789)
66 3/4"(1695)
66"(1676)
60 1/8"(1527)




SWC1866-5
SWPOC1866-5



SWC2066-5
SWPOC2066-5




SWC2466-5
SWPOC2466-5




SWC2866-5
SWPOC2866-5


74 15/16"(1903)
76 7/16"(1942)
72 3/4"(1848)
72"(1829)
66 1/8"(1680)




SWC1872-5
SWPOC1872-5



SWC2072-5
SWPOC2072-5



SWC2472-5
SWPOC2472-5



SWC2872-5
SWPOC2872-5

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS



5 WIDE UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

153 1/2"(3899)
156 1/2"(3975)
150 3/4"(3829)
150"(3810)
24 1/8"(613)[5]

163 1/2"(4153)
166 1/2"(4229)
160 3/4"(4083)
160"(4064)
26 1/8"(664)[5]

183 1/2"(4661)
186 1/2"(4737)
180 3/4"(4591)
180"(4572)
30 1/8"(765)[5]

14 15/16"(379) 16 1/2"(416) 19 3/4"(502) 12 1/8"(308) 12 1/8"(308)			
20 15/16"(523) 21 1/2"(544) 23 3/4"(602) 18 1/8"(466) 12 1/8"(308)			
20 15/16"(523) 21 1/2"(544) 23 3/4"(602) 20 1/8"(516) 14 1/8"(363)			
26 15/16"(684) 27 1/8"(702) 29 3/4"(752) 24 1/8"(613) 18 1/8"(466)			
30 15/16"(766) 31 1/8"(784) 33 3/4"(834) 28 1/8"(711) 22 1/8"(562)			
32 15/16"(837) 34 1/8"(855) 36 3/4"(905) 30 1/8"(765) 24 1/8"(613)			
38 15/16"(989) 40 1/8"(1007) 42 3/4"(1057) 36 1/8"(914) 30 1/8"(765)			
44 15/16"(1141) 46 1/8"(1159) 48 3/4"(1209) 42 1/8"(1071) 36 1/8"(914)			
50 15/16"(1294) 52 1/8"(1312) 54 3/4"(1362) 48 1/8"(1219) 42 1/8"(1070)			
56 15/16"(1446) 58 1/8"(1464) 60 3/4"(1514) 54 1/8"(1372) 48 1/8"(1222)			
62 15/16"(1599) 64 1/8"(1617) 66 3/4"(1667) 60 1/8"(1524) 54 1/8"(1375)			

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS



5 WIDE UNITS


MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

153 1/2"(3899)
156 1/2"(3975)
150 3/4"(3829)
150"(3810)
24 1/8"(613)[5]


163 1/2"(4153)
166 1/2"(4229)
160 3/4"(4083)
160"(4064)
26 1/8"(664)[5]

183 1/2"(4661)
186 1/2"(4737)
180 3/4"(4591)
180"(4572)
30 1/8"(765)[5]


68 15/16"(1751)
70 7/16"(1788)
66 3/4"(1695)
66"(1676)
60 1/8"(1527)



SWC3066-5
SWPOC3066-5




SWC3266-5
SWPOC3266-5




SWC3666-5
SWPOC3666-5


74 15/16"(1903)
76 7/16"(1942)
72 3/4"(1848)
72"(1829)
66 1/8"(1680)



SWC3072-5
SWPOC3072-5



SWC3272-5
SWPOC3272-5

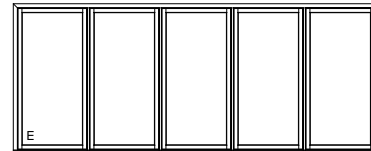

SWC3672-5
SWPOC3672-5

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS



PICTURE UNITS

M.O. BRICKMOUND
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


45 1/2"(1156)
48 1/2"(1232)
42 3/4"(1086)
42"(1067)
36 1/8"(918)

51 1/2"(1308)
54 1/2"(1384)
48 3/4"(1238)
48"(1219)
42 1/8"(1070)


57 1/2"(1461)
60 1/2"(1537)
54 3/4"(1391)
54"(1372)
48 1/8"(1222)

63 1/2"(1613)
66 1/2"(1689)
60 3/4"(1543)
60"(1524)
54 1/8"(1375)


14 15/16"(379)
16 7/16"(418)
12 3/4"(324)
12"(305)
6 1/8"(156)




SWCP4212
SWPOCP4212



SWCP4212
SWPOCP4212




SWCP4212
SWPOCP4212




SWCP4212
SWPOCP4212


20 15/16"(532)
22 7/16"(570)
18 3/4"(476)
18"(508)
12 1/8"(308)



SWCP4218
SWPOCP4218



SWCP4218
SWPOCP4218




SWCP4218
SWPOCP4218




SWCP4218
SWPOCP4218


22 15/16"(583)
24 7/16"(621)
20 3/4"(527)
20"(508)
14 1/8"(359)




SWCP4220
SWPOCP4220



SWCP4220
SWPOCP4220



SWCP4220
SWPOCP4220



SWCP4220
SWPOCP4220

26 15/16"(684)
28 7/16"(722)
24 3/4"(629)
24"(610)
18 1/8"(460)



SWCP4224
SWPOCP4224



SWCP4224
SWPOCP4224




SWCP4224
SWPOCP4224



SWCP4224
SWPOCP4224


30 15/16"(786)
32 7/16"(824)
28 3/4"(730)
28"(711)
22 1/8"(562)




SWCP4228
SWPOCP4228



SWCP4228
SWPOCP4228



SWCP4228
SWPOCP4228



SWCP4228
SWPOCP4228

32 15/16"(837)
34 7/16"(875)
30 3/4"(781)
30"(762)
24 1/8"(613)



SWCP4230
SWPOCP4230



SWCP4230
SWPOCP4230




SWCP4230
SWPOCP4230




SWCP4230
SWPOCP4230


38 15/16"(989)
40 7/16"(1027)
36 3/4"(933)
36"(914)
30 1/8"(765)




SWCP4236
SWPOCP4236



SWCP4236
SWPOCP4236



SWCP4236
SWPOCP4236



SWCP4236
SWPOCP4236

44 15/16"(1141)
46 7/16"(1180)
42 3/4"(1086)
42"(1067)
36 1/8"(918)



SWCP4242
SWPOCP4242



SWCP4242
SWPOCP4242



SWCP4242
SWPOCP4242



SWCP4242
SWPOCP4242

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING



PICTURE UNITS

M.O. BRICKMOUND
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


45 1/2"(1156)
48 1/2"(1232)
42 3/4"(1086)
42"(1067)
36 1/8"(918)

51 1/2"(1308)
54 1/2"(1384)
48 3/4"(1238)
48"(1219)
42 1/8"(1070)


57 1/2"(1461)
60 1/2"(1537)
54 3/4"(1391)
54"(1372)
48 1/8"(1222)

63 1/2"(1613)
66 1/2"(1689)
60 3/4"(1543)
60"(1524)
54 1/8"(1375)


50 15/16"(1294)
52 7/16"(1332)
48 3/4"(1238)
48"(1219)
42 1/8"(1070)




SWCP4248
SWPOCP4248



SWCP4248
SWPOCP4248




SWCP4248
SWPOCP4248




SWCP4248
SWPOCP4248


56 15/16"(1446)
58 7/16"(1484)
54 3/4"(1381)
54"(1372)
48 1/8"(1222)




SWCP4254
SWPOCP4254



SWCP4254
SWPOCP4254




SWCP4254
SWPOCP4254




SWCP4254
SWPOCP4254


62 15/16"(1599)
64 7/16"(1637)
60 3/4"(1543)
60"(1524)
54 1/8"(1375)




SWCP42160
SWPOCP4260



SWCP4260
SWPOCP4260




SWCP4260
SWPOCP4260




SWCP4260
SWPOCP4260


68 15/16"(1751)
70 7/16"(1789)
66 3/4"(1695)
66"(1676)
60 1/8"(1527)




SWCP4266
SWPOCP4266



SWCP4266
SWPOCP4266




SWCP4266
SWPOCP4266




SWCP4266
SWPOCP4266


74 15/16"(1903)
76 7/16"(1942)
72 3/4"(1848)
72"(1829)
66 1/8"(1680)




SWCP4272
SWPOCP4272



SWCP4272
SWPOCP4272



SWCP4272
SWPOCP4272



SWCP4272
SWPOCP4272

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES PREFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING



PICTURE UNITS

M.O. BRICKMOUND
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


45 1/2"(1156)
48 1/2"(1232)
42 3/4"(1086)
42"(1067)
36 1/8"(918)

51 1/2"(1308)
54 1/2"(1384)
48 3/4"(1238)
48"(1219)
42 1/8"(1070)


57 1/2"(1461)
60 1/2"(1537)
54 3/4"(1391)
54"(1372)
48 1/8"(1222)

63 1/2"(1613)
66 1/2"(1689)
60 3/4"(1543)
60"(1524)
54 1/8"(1375)


80 15/16"(2056)
82 7/16"(2084)
78 3/4"(2000)
78"(1981)
72 1/8"(1832)




SWCP4278
SWPOCP4278



SWCP4278
SWPOCP4278




SWCP4278
SWPOCP4278




SWCP4278
SWPOCP4278


86 15/16"(2208)
88 7/16"(2246)
84 3/4"(2153)
84"(2134)
78 1/8"(1984)




SWCP4284
SWPOCP4284



SWCP4284
SWPOCP4284




SWCP4284
SWPOCP4284




SWCP4284
SWPOCP4284


98 15/16"(2513)
100 7/16"(2551)
96 3/4"(2457)
96"(2438)
90 1/8"(2289)

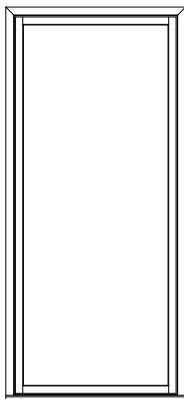


SWCP4296
SWPOCP4296

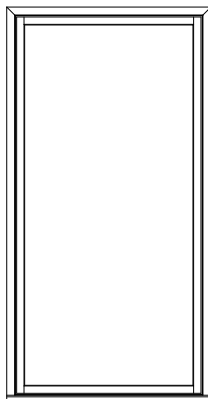

SWCP4296
SWPOCP4296

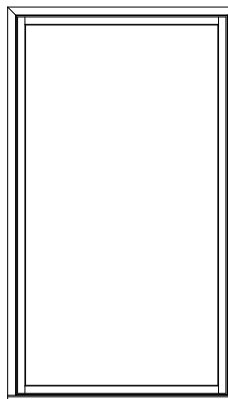

SWCP4296
SWPOCP4296



SWCP4296
SWPOCP4296

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING



PICTURE UNITS


M.O. BRICKMOUND
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

69 1/2"(1765)
72 1/2"(1842)
66 3/4"(1695)
66"(1676)
60 1/8"(1527)


75 1/2"(1918)
78 1/2"(1994)
72 3/4"(1848)
72"(1829)
66 1/8"(1680)

87 1/2"(2223)
90 1/2"(2299)
84 3/4"(2153)
84"(2134)
78 1/8"(1984)


14 15/16"(379)
16 7/16"(418)
12 3/4"(324)
12"(305)
6 1/8"(156)



SWCP4212
SWPOCP4212



SWCP4212
SWPOCP4212



SWCP8412
SWPOCP8412

20 15/16"(532)
22 7/16"(570)
18 3/4"(476)
18"(508)
12 1/8"(308)



SWCP4218
SWPOCP4218




SWCP4218
SWPOCP4218




SWCP8418
SWPOCP8418


22 15/16"(589)
24 7/16"(627)
20 3/4"(527)
20"(508)
14 1/8"(359)



SWCP4220
SWPOCP4220




SWCP4220
SWPOCP4220




SWCP8420
SWPOCP8420


26 15/16"(684)
28 7/16"(722)
24 3/4"(629)
24"(610)
18 1/8"(460)



SWCP4224
SWPOCP4224




SWCP4224
SWPOCP4224




SWCP8424
SWPOCP8424


30 15/16"(786)
32 7/16"(824)
28 3/4"(730)
28"(711)
22 1/8"(562)



SWCP42128
SWPOCP4228




SWCP4228
SWPOCP4228




SWCP8428
SWPOCP8428


32 15/16"(837)
34 7/16"(875)
30 3/4"(781)
30"(762)
24 1/8"(613)



SWCP4230
SWPOCP4230




SWCP4230
SWPOCP4230




SWCP8430
SWPOCP8430


38 15/16"(989)
40 7/16"(1027)
36 3/4"(933)
36"(914)
30 1/8"(765)



SWCP42136
SWPOCP4236



SWCP4236
SWPOCP4236

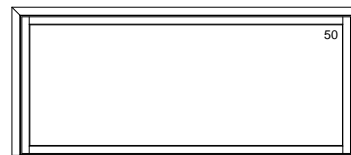

SWCP8436
SWPOCP8436

44 15/16"(1141)
46 7/16"(1180)
42 3/4"(1086)
42"(1067)
36 1/8"(918)



SWCP4242
SWPOCP4242



SWCP4242
SWPOCP4242



SWCP8442
SWPOCP8442

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING



PICTURE UNITS


M.O. BRICKMOUND
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

69 1/2"(1765)
72 1/2"(1842)
66 3/4"(1695)
66"(1676)
60 1/8"(1527)


75 1/2"(1918)
78 1/2"(1994)
72 3/4"(1848)
72"(1829)
66 1/8"(1680)

87 1/2"(2223)
90 1/2"(2299)
84 3/4"(2153)
84"(2134)
78 1/8"(1984)


50 15/16"(1294)
52 7/16"(1332)
48 3/4"(1238)
48"(1219)
42 1/8"(1070)



SWCP4248
SWPOCP4248




SWCP4248
SWPOCP4248

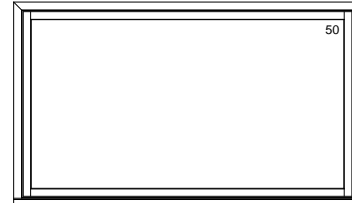


SWCP8448
SWPOCP8448

56 15/16"(1446)
58 7/16"(1484)
54 3/4"(1391)
54"(1372)
48 1/8"(1222)



SWCP4254
SWPOCP4254




SWCP4254
SWPOCP4254




SWCP8454
SWPOCP8454

62 15/16"(1599)
64 7/16"(1637)
60 3/4"(1543)
60"(1524)
54 1/8"(1375)



SWCP4260
SWPOCP4260




SWCP4260
SWPOCP4260




SWCP8460
SWPOCP8460


68 15/16"(1751)
70 7/16"(1789)
66 3/4"(1695)
66"(1676)
60 1/8"(1527)



SWCP4266
SWPOCP4266




SWCP4266
SWPOCP4266

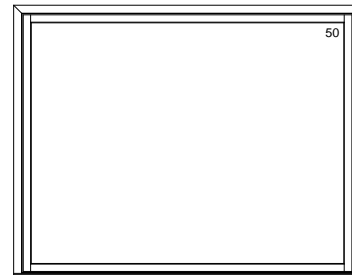


SWCP8466
SWPOCP8466


74 15/16"(1903)
76 7/16"(1942)
72 3/4"(1848)
72"(1829)
66 1/8"(1680)



SWCP4272
SWPOCP4272



SWCP4272
SWPOCP4272

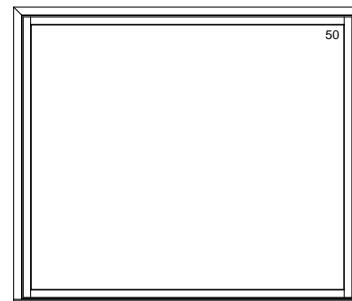

SWCP8472
SWPOCP8472

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING



PICTURE UNITS


M.O. BRICKMOUND
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

69 1/2"(1765)
72 1/2"(1842)
66 3/4"(1695)
66"(1676)
60 1/8"(1527)


75 1/2"(1918)
78 1/2"(1994)
72 3/4"(1848)
72"(1829)
66 1/8"(1680)

87 1/2"(2223)
90 1/2"(2299)
84 3/4"(2153)
84"(2134)
78 1/8"(1984)


80 15/16"(2056)
82 7/16"(2094)
78 3/4"(2000)
76"(1981)
72 1/8"(1832)



SWCP4278
SWPOCP4278




SWCP4278
SWPOCP4278

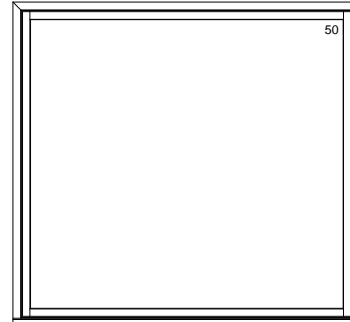


SWCP8478
SWPOCP8478


86 15/16"(2208)
88 7/16"(2246)
84 3/4"(2153)
84"(2134)
78 1/8"(1984)



SWCP4284
SWPOCP4284




SWCP4284
SWPOCP4284

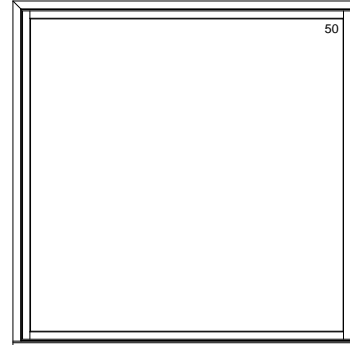


SWCP8484
SWPOCP8484

98 15/16"(2513)
100 7/16"(2551)
96 3/4"(2457)
96"(2438)
90 1/8"(2289)



SWCP4296
SWPOCP4296



SWCP4296
SWPOCP4296

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING




PICTURE UNITS

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

99 1/2"(2527)
102 1/2"(2604)
96 3/4"(2457)
96"(2438)
90 1/8"(2289)

14 15/16"(1379)
16 7/16"(418)
12 3/4"(324)
12"(305)
6 1/8"(156)




SWCP9612
SWPOCP9612

20 15/16"(532)
22 7/16"(570)
18 3/4"(476)
18"(508)
12 1/8"(308)




SWCP9618
SWPOCP9618

22 15/16"(688)
24 7/16"(621)
20 3/4"(527)
20"(508)
14 1/8"(359)




SWCP9620
SWPOCP9620

26 15/16"(684)
28 7/16"(722)
24 3/4"(629)
24"(610)
18 1/8"(460)




SWCP9624
SWPOCP9624

30 15/16"(786)
32 7/16"(824)
28 3/4"(730)
28"(711)
22 1/8"(562)




SWCP9628
SWPOCP9628

32 15/16"(837)
34 7/16"(875)
30 3/4"(781)
30"(762)
24 1/8"(613)




SWCP9630
SWPOCP9630

38 15/16"(989)
40 7/16"(1027)
36 3/4"(933)
36"(914)
30 1/8"(765)

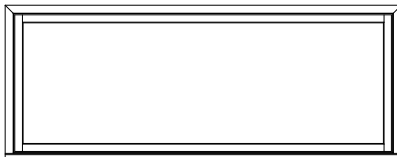

SWCP9636
SWPOCP9636

44 15/16"(1141)
46 7/16"(1180)
42 3/4"(1086)
42"(1067)
36 1/8"(918)

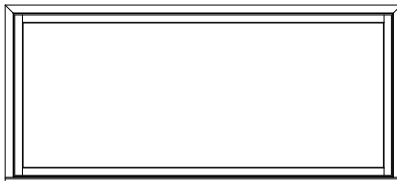

SWCP9642
SWPOCP9642


ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


99 1/2"(2527)
102 1/2"(2604)
96 3/4"(2457)
96"(2438)
90 1/8"(2289)

50 15/16"(1304)
52 7/16"(1332)
48 3/4"(1236)
48"(1219)
42 1/8"(1070)

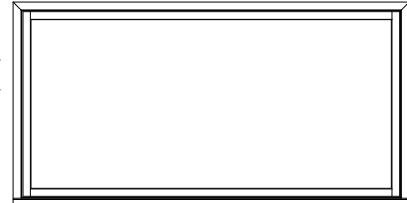

SWCP9648
SWPOCP9648

56 15/16"(1446)
58 7/16"(1484)
54 3/4"(1391)
54"(1372)
48 1/8"(1222)

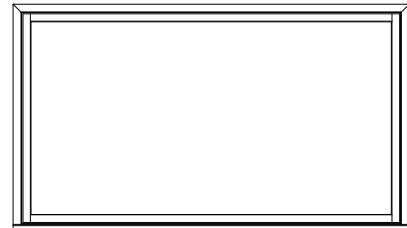


SWCP9654
SWPOCP9654

62 15/16"(1599)
64 7/16"(1637)
60 3/4"(1543)
60"(1524)
54 1/8"(1375)




SWCP9660
SWPOCP9660

68 15/16"(1751)
70 7/16"(1789)
66 3/4"(1695)
66"(1676)
60 1/8"(1527)

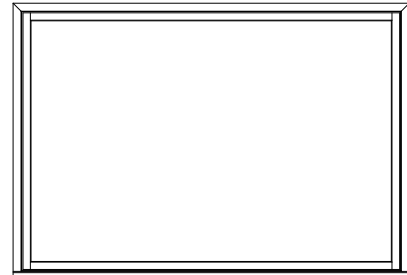

SWCP9666
SWPOCP9666


















































74 15/16"(1903)
76 7/16"(1942)
72 3/4"(1848)
72"(1829)
66 1/8"(1680)



SWCP9672
SWPOCP9672



SECTOR TOP UNITS

M.O. BRICKMOULD	21 1/2"(546)	23 1/2"(597)	27 1/2"(699)	31 1/2"(800)	33 1/2"(851)	35 1/2"(902)	39 1/2"(1003)
M.O. ADAMS/FLAT CASING	24 1/2"(622)	26 1/2"(673)	30 1/2"(775)	34 1/2"(876)	36 1/2"(927)	38 1/2"(978)	42 1/2"(1080)
ROUGH OPENING	18 3/4"(476)	20 3/4"(527)	24 3/4"(629)	28 3/4"(730)	30 3/4"(781)	32 3/4"(832)	36 3/4"(933)
FRAME SIZE	18"(457)	20"(508)	24"(610)	28"(711)	30"(762)	32"(813)	36"(914)
DAYLIGHT OPENING	12 1/8"(308)	14 1/8"(359)	18 1/8"(460)	22 1/8"(562)	24 1/8"(613)	26 1/8"(664)	30 1/8"(765)
20 15/16"(532) 22 7/16"(570) 18 3/4"(476) 18"(508) 12 1/8"(308)							
22 15/16"(583) 24 7/16"(621) 20 3/4"(527) 20"(508) 14 1/8"(359)							
26 15/16"(684) 28 7/16"(722) 24 3/4"(629) 24"(610) 18 1/8"(460)							
30 15/16"(786) 32 7/16"(824) 28 3/4"(730) 28"(711) 22 1/8"(562)							
32 15/16"(837) 34 7/16"(875) 30 3/4"(781) 30"(762) 24 1/8"(613)							
38 15/16"(989) 40 7/16"(1027) 36 3/4"(933) 36"(914) 30 1/8"(765)							
44 15/16"(1141) 46 7/16"(1180) 42 3/4"(1086) 42"(1067) 36 1/8"(918)							





ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
- S STATIONARY UNITS ONLY



SECTOR TOP UNITS

M.O. BRICKMOULD	21 1/2"(546)	23 1/2"(597)	27 1/2"(699)	31 1/2"(800)	33 1/2"(851)	35 1/2"(902)	39 1/2"(1003)
M.O. ADAMS/FLAT CASING	24 1/2"(622)	26 1/2"(673)	30 1/2"(775)	34 1/2"(876)	36 1/2"(927)	38 1/2"(978)	42 1/2"(1080)
ROUGH OPENING	18 3/4"(476)	20 3/4"(527)	24 3/4"(629)	28 3/4"(730)	30 3/4"(781)	32 3/4"(832)	36 3/4"(933)
FRAME SIZE	18"(457)	20"(508)	24"(610)	28"(711)	30"(762)	32"(813)	36"(914)
DAYLIGHT OPENING	12 1/8"(308)	14 1/8"(359)	18 1/8"(460)	22 1/8"(562)	24 1/8"(613)	26 1/8"(664)	30 1/8"(765)

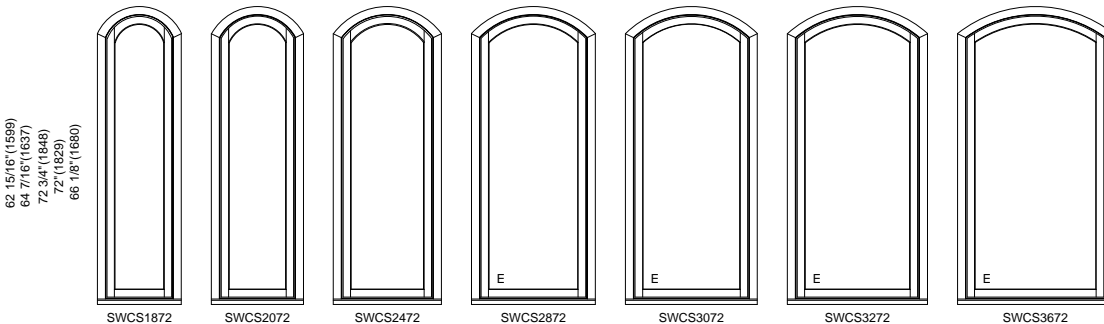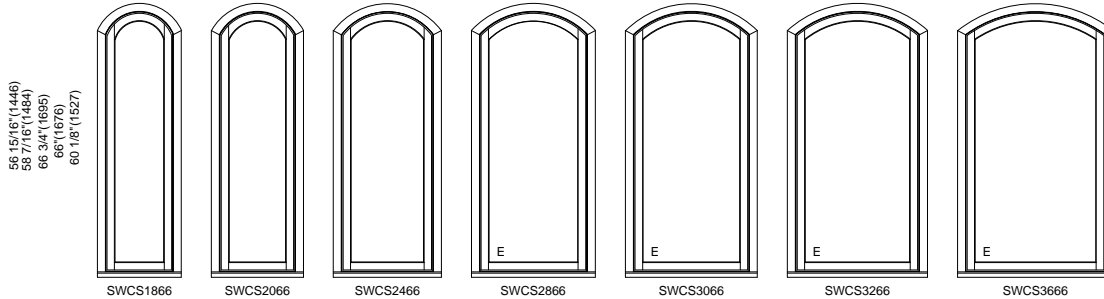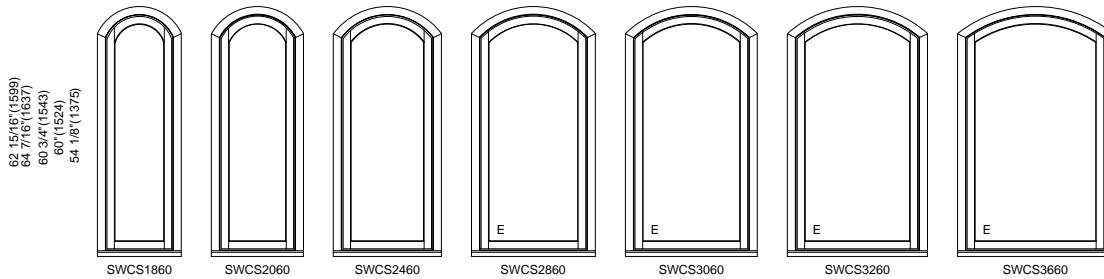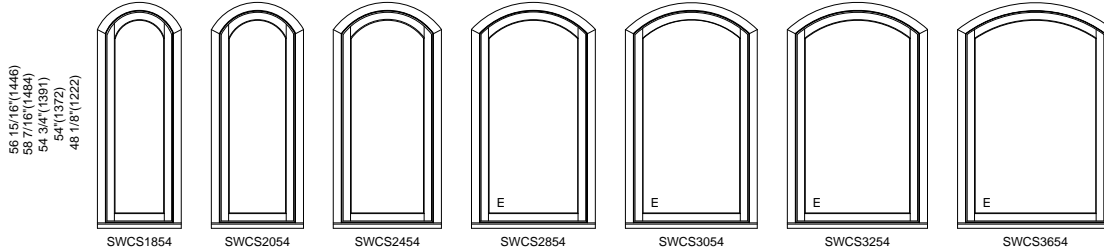


ELEVATION SYMBOL LEGEND:
M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
S STATIONARY UNITS ONLY



SECTOR TOP UNITS

M.O. BRICKMOULD	21 1/2"(546)	23 1/2"(597)	27 1/2"(699)	31 1/2"(800)	33 1/2"(851)	35 1/2"(902)	39 1/2"(1003)
M.O. ADAMS/FLAT CASING	24 1/2"(622)	26 1/2"(673)	30 1/2"(775)	34 1/2"(876)	36 1/2"(927)	38 1/2"(978)	42 1/2"(1080)
ROUGH OPENING	18 3/4"(476)	20 3/4"(527)	24 3/4"(629)	28 3/4"(730)	30 3/4"(781)	32 3/4"(832)	36 3/4"(933)
FRAME SIZE	18"(457)	20"(508)	24"(610)	28"(711)	30"(762)	32"(813)	36"(914)
DAYLIGHT OPENING	12 1/8"(308)	14 1/8"(359)	18 1/8"(460)	22 1/8"(562)	24 1/8"(613)	26 1/8"(664)	30 1/8"(765)

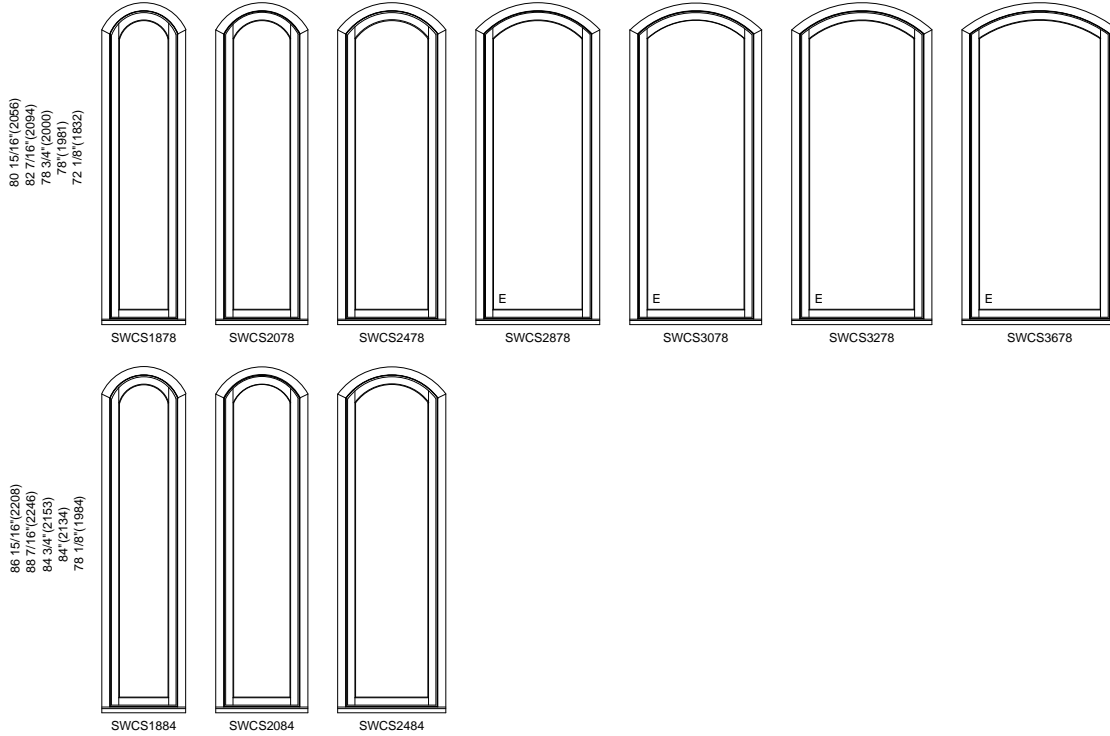

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
- E.1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
- S STATIONARY UNITS ONLY



2 WIDE SECTOR TOP UNITS

MO BRICKMOLD	39 1/2"(1003)	43 1/2"(1105)	51 1/2"(1308)	59 1/2"(1511)	63 1/2"(1613)	67 1/2"(1715)	75 1/2"(1918)
MO FLAT CASING	42 1/2"(1076)	46 1/2"(1181)	54 1/2"(1384)	62 1/2"(1588)	66 1/2"(1689)	70 1/2"(1791)	78 1/2"(1994)
ROUGH OPENING	36 3/4"(933)	40 3/4"(1035)	48 3/4"(1238)	56 3/4"(1441)	60 3/4"(1543)	64 3/4"(1645)	72 3/4"(1848)
FRAME SIZE	36"(914)	40"(1016)	48"(1219)	56"(1422)	60"(1524)	64"(1626)	72"(1829)
DAYLIGHT OPENING	12 1/8"(308)[2]	14 1/8"(359)[2]	18 1/8"(460)[2]	22 1/8"(562)[2]	24 1/8"(613)[2]	26 1/8"(664)[2]	30 1/8"(765)[2]
20 15/16"(532) 22 7/16"(570) 18 3/4"(476) 18 (457) 12 1/8 (308)							
22 15/16"(583) 24 7/16"(621) 20 3/4"(527) 20 (508) 14 1/8 (359)							
26 15/16"(684) 28 7/16"(722) 24 3/4"(628) 24 (610) 18 1/8 (460)							
30 15/16"(786) 32 7/16"(824) 28 3/4"(730) 28 (711) 22 1/8 (562)							
32 15/16"(837) 34 7/16"(875) 30 3/4"(781) 30 (762) 24 1/8 (613)							
38 15/16"(989) 40 7/16"(1027) 36 3/4"(933) 36 (914) 30 1/8 (765)							
44 15/16"(1141) 46 7/16"(1180) 42 3/4"(1086) 42 (1067) 36 1/8 (918)							
50 15/16"(1294) 52 7/16"(1332) 48 3/4"(1238) 48 (1219) 42 1/8 (1070)							
56 15/16"(1446) 58 7/16"(1484) 54 3/4"(1391) 54 (1372) 48 1/8 (1222)							
62 15/16"(1599) 64 7/16"(1637) 60 3/4"(1543) 60 (1524) 54 1/8 (1375)							

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING

VALUES IN () ARE IN MILLIMETER CONVERSIONS


E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS

E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS



2 WIDE SECTOR TOP UNITS

MO BRICKMOLD	39 1/2"(1003)	43 1/2"(1105)	51 1/2"(1308)	59 1/2"(1511)	63 1/2"(1613)	67 1/2"(1715)	75 1/2"(1918)
MO FLAT CASING	42 1/2"(1076)	46 1/2"(1181)	54 1/2"(1384)	62 1/2"(1588)	66 1/2"(1689)	70 1/2"(1791)	78 1/2"(1994)
ROUGH OPENING	36 3/4"(933)	40 3/4"(1035)	48 3/4"(1238)	56 3/4"(1441)	60 3/4"(1543)	64 3/4"(1645)	72 3/4"(1848)
FRAME SIZE	36"(914)	40"(1016)	48"(1219)	56"(1422)	60"(1524)	64"(1626)	72"(1829)
DAYLIGHT OPENING	12 1/8"(308)[2]	14 1/8"(359)[2]	18 1/8"(460)[2]	22 1/8"(562)[2]	24 1/8"(613)[2]	26 1/8"(664)[2]	30 1/8"(765)[2]

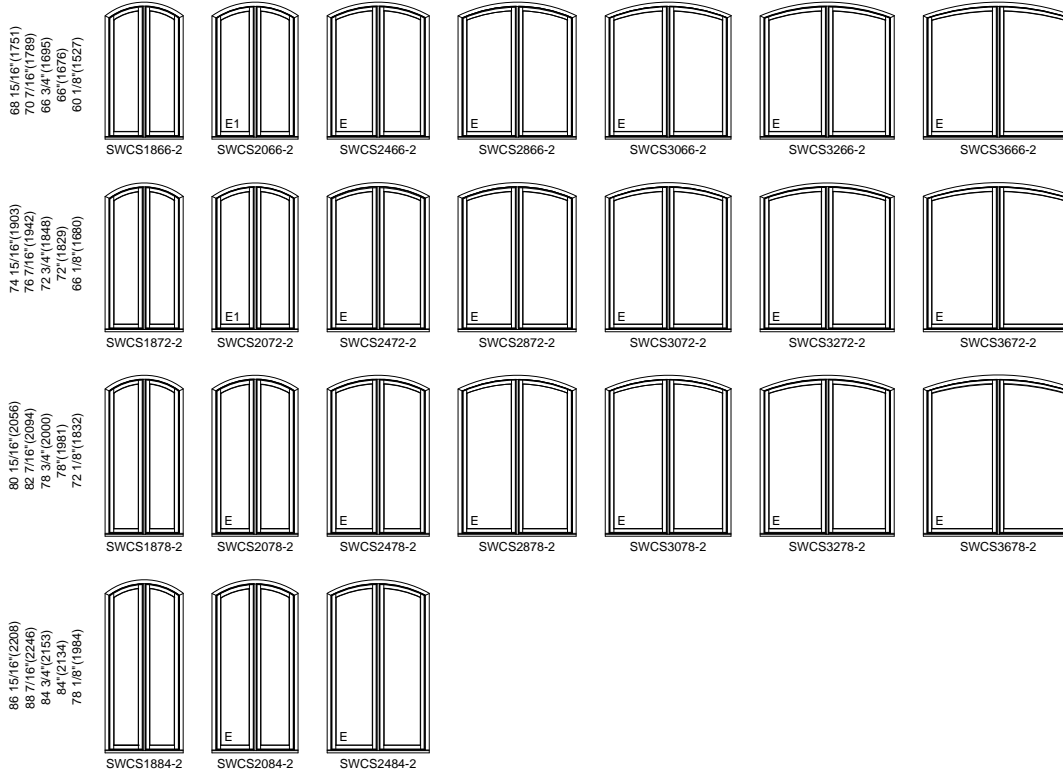

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS



3 WIDE SECTOR TOP UNITS

MO BRICKMOLD	57 1/2"(1461)	63 1/2"(1613)	75 1/2"(1918)	87 1/2"(2223)	93 1/2"(2375)
MO FLAT CASING	60 1/2"(1537)	66 1/2"(1689)	78 1/2"(1994)	90 1/2"(2299)	96 1/2"(2451)
ROUGH OPENING	54 3/4"(1391)	60 3/4"(1543)	72 3/4"(1238)	84 3/4"(2153)	90 3/4"(2305)
FRAME SIZE	54"(1372)	60"(1524)	72"(1219)	84"(2134)	90"(2286)
DAYLIGHT OPENING	12 1/8"(308)[3]	14 1/8"(359)[3]	18 1/8"(460)[3]	22 1/8"(562)[3]	24 1/8"(613)[3]
20 15/16"(532) 22 7/16"(570) 18 3/4"(476) 18 1/8"(460) 12 1/8"(308)	 SWCS1818-3	 SWCS2018-3	 SWCS2418-3	 SWCS2818-3	 SWCS3018-3
22 15/16"(653) 24 7/16"(621) 20 3/4"(527) 20 3/8"(509) 14 1/8"(359)	 SWCS1820-3	 SWCS2020-3	 SWCS2420-3	 SWCS2820-3	 SWCS3020-3
26 15/16"(694) 28 7/16"(722) 24 3/4"(628) 24 1/8"(610) 18 1/8"(460)	 SWCS1824-3	 SWCS2024-3	 SWCS2424-3	 SWCS2824-3	 SWCS3024-3
30 15/16"(786) 32 7/16"(824) 28 3/4"(730) 28 1/8"(702) 22 1/8"(562)	 SWCS1828-3	 SWCS2028-3	 SWCS2428-3	 SWCS2828-3	 SWCS3028-3
32 15/16"(837) 34 7/16"(875) 30 3/4"(781) 30 1/8"(763) 24 1/8"(613)	 SWCS1830-3	 SWCS2030-3	 SWCS2430-3	 SWCS2830-3	 SWCS3030-3
38 15/16"(989) 40 7/16"(1027) 36 3/4"(933) 36 1/8"(915) 30 1/8"(765)	 SWCS1836-3	 SWCS2036-3	 SWCS2436-3	 SWCS2836-3	 SWCS3036-3
44 15/16"(1141) 46 7/16"(1180) 42 3/4"(1086) 42 1/8"(1067) 36 1/8"(916)	 SWCS1842-3	 SWCS2042-3	 SWCS2442-3	 SWCS2842-3	 SWCS3042-3
50 15/16"(1294) 52 7/16"(1332) 48 3/4"(1238) 48 1/8"(1219) 42 1/8"(1070)	 SWCS1848-3	 SWCS2048-3	 SWCS2448-3	 SWCS2848-3	 SWCS3048-3
56 15/16"(1446) 58 7/16"(1484) 54 3/4"(1391) 54 1/8"(1372) 48 1/8"(1222)	 SWCS1854-3	 SWCS2054-3	 SWCS2454-3	 SWCS2854-3	 SWCS3054-3
62 15/16"(1599) 64 7/16"(1637) 60 3/4"(1543) 60 1/8"(1524) 54 1/8"(1375)	 SWCS1860-3	 SWCS2060-3	 SWCS2460-3	 SWCS2860-3	 SWCS3060-3


ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS



3 WIDE SECTOR TOP UNITS

MO BRICKMOLD	57 1/2"(1461)	63 1/2"(1613)	75 1/2"(1918)	87 1/2"(2223)	93 1/2"(2375)
MO FLAT CASING	60 1/2"(1537)	66 1/2"(1689)	78 1/2"(1994)	90 1/2"(2299)	96 1/2"(2451)
ROUGH OPENING	54 3/4"(1391)	60 3/4"(1543)	72 3/4"(1238)	84 3/4"(2153)	90 3/4"(2305)
FRAME SIZE	54"(1372)	60"(1524)	72"(1219)	84"(2134)	90"(2286)
DAYLIGHT OPENING	12 1/8"(308)[3]	14 1/8"(359)[3]	18 1/8"(460)[3]	22 1/8"(562)[3]	24 1/8"(613)[3]

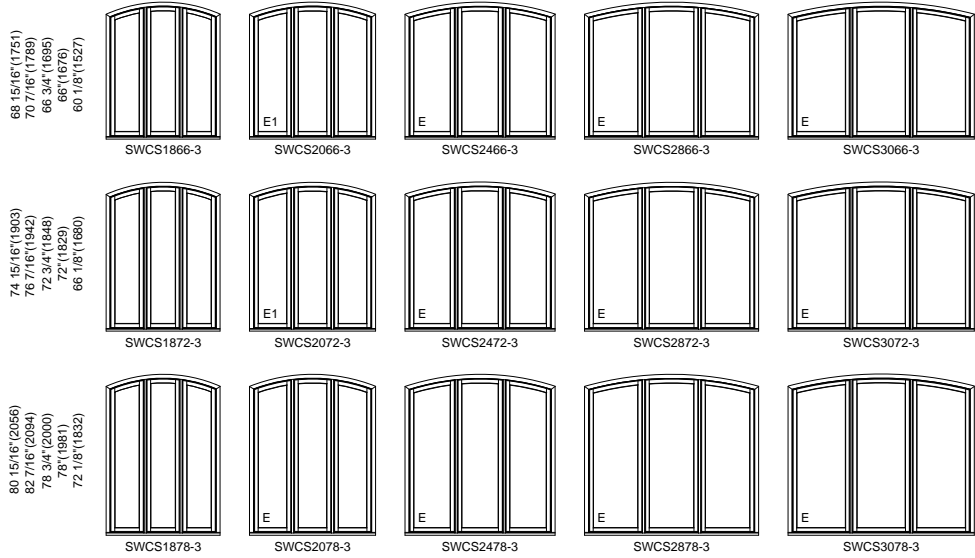

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS




3 WIDE SECTOR TOP UNITS

MO BRICKMOLD	99 1/2"(2527)	111 1/2"(2832)
MO FLAT CASING	102 1/2"(2604)	114 1/2"(2908)
ROUGH OPENING	96 3/4"(2457)	108 3/4"(2762)
FRAME SIZE	96"(2438)	108"(2743)
DAYLIGHT OPENING	26 1/8"(664)[3]	30 1/8"(765)[3]

21"(533)
22 1/2"(572)
18 3/4"(476)
18"(457)
12 1/8"(308)



SWCS3218-3



SWCS3618-3

23"(584)
24 1/2"(622)
20 3/4"(527)
20"(508)
14 1/8"(369)



SWCS3220-3



SWCS3620-3

27"(686)
28 1/2"(724)
24 3/4"(629)
24"(610)
18 1/8"(460)



SWCS3224-3



SWCS3624-3

31"(787)
32 1/2"(826)
28 3/4"(730)
28"(711)
22 1/8"(562)




SWCS3228-3




SWCS3628-3

33"(838)
34 1/2"(876)
30 3/4"(781)
30"(762)
24 1/8"(613)




SWCS3230-3




SWCS3630-3

38"(961)
40 1/2"(1029)
36 3/4"(933)
36"(914)
30 1/8"(765)



SWCS3236-3



SWCS3636-3

45"(1143)
46 1/2"(1181)
42 3/4"(1086)
42"(1067)
36 1/8"(918)



SWCS3242-3



SWCS3642-3

51"(1295)
52 1/2"(1334)
48 3/4"(1238)
48"(1219)
42 1/8"(1070)



SWCS3248-3




SWCS3648-3

57"(1448)
58 1/2"(1486)
54 3/4"(1391)
54"(1372)
48 1/8"(1222)



SWCS3254-3



SWCS3654-3

63"(1600)
64 1/2"(1638)
60 3/4"(1543)
60"(1524)
54 1/8"(1375)



SWCS3260-3



SWCS3660-3


ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS



3 WIDE SECTOR TOP UNITS

MO BRICKMOLD	99 1/2"(2527)	111 1/2"(2832)
MO FLAT CASING	102 1/2"(2604)	114 1/2"(2908)
ROUGH OPENING	96 3/4"(2457)	108 3/4"(2762)
FRAME SIZE	96"(2438)	108"(2743)
DAYLIGHT OPENING	26 1/8"(664)[3]	30 1/8"(765)[3]

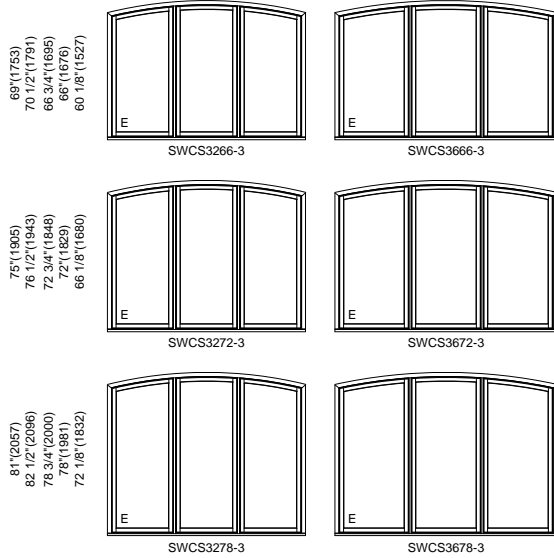
















ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS



PICTURE WITH 18" FLANKER

MO BRICKMOLD	81 1/2"(2070)	93 1/2"(2375)	105 1/2"(2680)
MO FLAT CASING	84 1/2"(2146)	96 1/2"(2451)	108 1/2"(2756)
ROUGH OPENING	78 3/4"(2000)	90 3/4"(2305)	102 3/4"(2610)
FRAME SIZE	78"(1981)	90"(2286)	102"(2590)
DAYLIGHT OPENING	12 1/8"(308)[2] 36 1/8"(918)	12 1/8"(308)[2] 48 1/8"(1222)	12 1/8"(308)[2] 60 1/8"(1527)

44 15/16"(1141) 46 7/16"(1180) 42 3/4"(1086) 42"(1067) 36 1/8"(918)			
	SWCPF4242-18 SWPOCPF4242-18	SWCPF5442-18 SWPOCPF5442-18	SWCPF6642-18 SWPOCPF6642-18
50 15/16"(1294) 52 7/16"(1332) 48 3/4"(1238) 48"(1219) 42 1/8"(1070)			
	SWCPF4248-18 SWPOCPF4248-18	SWCPF5448-18 SWPOCPF5448-18	SWCPF6648-18 SWPOCPF6648-18
56 15/16"(1446) 58 7/16"(1484) 54 3/4"(1391) 54"(1372) 48 1/8"(1222)			
	SWCPF4254-18 SWPOCPF4254-18	SWCPF5454-18 SWPOCPF5454-18	SWCPF6654-18 SWPOCPF6654-18
62 15/16"(1599) 64 7/16"(1637) 60 3/4"(1543) 60"(1524) 54 1/8"(1375)			
	SWCPF4260-18 SWPOCPF4260-18	SWCPF5460-18 SWPOCPF5460-18	SWCPF6660-18 SWPOCPF6660-18
68 15/16"(1751) 70 7/16"(1789) 66 3/4"(1695) 66"(1676) 60 1/8"(1527)			
	SWCPF4266-18 SWPOCPF4266-18	SWCPF5466-18 SWPOCPF5466-18	SWCPF6666-18 SWPOCPF6666-18
















ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
 ## NUMBER INDICATES PREFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING



PICTURE WITH 20" FLANKER

MO BRICKMOLD	85 1/2"(2171)	97 1/2"(2477)	109 1/2"(2781)
MO FLAT CASING	88 1/2"(2248)	100 1/2"(2553)	112 1/2"(2858)
ROUGH OPENING	82 3/4"(2102)	94 3/4"(2407)	106 3/4"(2711)
FRAME SIZE	82"(2083)	94"(2388)	106"(2692)
DAYLIGHT OPENING	14 1/8"(359)[2] 36 1/8"(918)	14 1/8"(359)[2] 48 1/8"(1222)	14 1/8"(359)[2] 60 1/8"(1527)

44 15/16"(1141) 46 7/16"(1180) 42 3/4"(1086) 42"(1067) 36 1/8"(918)	 SWCPF4242-20 SWPOCPF4242-20	 SWCPF5442-20 SWPOCPF5442-20	 SWCPF6642-20 SWPOCPF6642-20
50 15/16"(1294) 52 7/16"(1332) 48 3/4"(1238) 48"(1219) 42 1/8"(1070)	 SWCPF4248-20 SWPOCPF4248-20	 SWCPF5448-20 SWPOCPF5448-20	 SWCPF6648-20 SWPOCPF6648-20
56 15/16"(1446) 58 7/16"(1484) 54 3/4"(1391) 54"(1372) 48 1/8"(1222)	 SWCPF4254-20 SWPOCPF4254-20	 SWCPF5454-20 SWPOCPF5454-20	 SWCPF6654-20 SWPOCPF6654-20
62 15/16"(1599) 64 7/16"(1637) 60 3/4"(1543) 60"(1524) 54 1/8"(1375)	 SWCPF4260-20 SWPOCPF4260-20	 SWCPF5460-20 SWPOCPF5460-20	 SWCPF6660-20 SWPOCPF6660-20
68 15/16"(1751) 70 7/16"(1789) 66 3/4"(1695) 66"(1676) 60 1/8"(1527)	 SWCPF4266-20 SWPOCPF4266-20	 SWCPF5466-20 SWPOCPF5466-20	 SWCPF6666-20 SWPOCPF6666-20
















ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS



PICTURE WITH 24" FLANKER

MO BRICKMOLD	93 1/2"(2375)	105 1/2"(2680)	117 1/2"(2985)
MO FLAT CASING	96 1/2"(2451)	108 1/2"(2756)	120 1/2"(3061)
ROUGH OPENING	90 3/4"(2305)	102 3/4"(2610)	114 3/4"(2915)
FRAME SIZE	90"(2286)	102"(2590)	114"(2896)
DAYLIGHT OPENING	18 1/8"(460)[2] 36 1/8"(918)	18 1/8"(460)[2] 48 1/8"(1222)	18 1/8"(460)[2] 60 1/8"(1527)

44 15/16"(1141) 46 7/16"(1180) 42 3/4"(1086) 42"(1067) 36 1/8"(918)			
	SWCPF4242-24 SWPOCPF4242-24	SWCPF5442-24 SWPOCPF5442-24	SWCPF6642-24 SWPOCPF6642-24
50 15/16"(1294) 52 7/16"(1332) 48 3/4"(1238) 48"(1219) 42 1/8"(1070)			
	SWCPF4248-24 SWPOCPF4248-24	SWCPF5448-24 SWPOCPF5448-24	SWCPF6648-24 SWPOCPF6648-24
56 15/16"(1446) 58 7/16"(1484) 54 3/4"(1391) 54"(1372) 48 1/8"(1222)			
	SWCPF4254-24 SWPOCPF4254-24	SWCPF5454-24 SWPOCPF5454-24	SWCPF6654-24 SWPOCPF6654-24
62 15/16"(1599) 64 7/16"(1637) 60 3/4"(1543) 60"(1524) 54 1/8"(1375)			
	SWCPF4260-24 SWPOCPF4260-24	SWCPF5460-24 SWPOCPF5460-24	SWCPF6660-24 SWPOCPF6660-24
68 15/16"(1751) 70 7/16"(1789) 66 3/4"(1695) 66"(1676) 60 1/8"(1527)			
	SWCPF4266-24 SWPOCPF4266-24	SWCPF5466-24 SWPOCPF5466-24	SWCPF6666-24 SWPOCPF6666-24

ELEVATION SYMBOL LEGEND:

M.O. = MASORY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
 ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING



PICTURE WITH 28" FLANKER

MO BRICKMOLD	101 1/2"(2578)	113 1/2"(2883)
MO FLAT CASING	104 1/2"(2654)	116 1/2"(2959)
ROUGH OPENING	98 3/4"(2508)	110 3/4"(2813)
FRAME SIZE	98"(2489)	110"(2794)
DAYLIGHT OPENING	22 1/8"(562)[2] 36 1/8"(918)	22 1/8"(562)[2] 48 1/8"(1222)

44 15/16"(1141) 46 7/16"(1180) 42 3/4"(1086) 42"(1067) 36 1/8"(918)		
	SWCPF4242-28 SWPOCPF4242-28	SWCPF5442-28 SWPOCPF5442-28
50 15/16"(1294) 52 7/16"(1332) 48 3/4"(1238) 48"(1219) 42 1/8"(1070)		
	SWCPF4248-28 SWPOCPF4248-28	SWCPF5448-28 SWPOCPF5448-28
56 15/16"(1446) 58 7/16"(1484) 54 3/4"(1391) 54"(1372) 48 1/8"(1222)		
	SWCPF4254-28 SWPOCPF4254-28	SWCPF5454-28 SWPOCPF5454-28
62 15/16"(1599) 64 7/16"(1637) 60 3/4"(1543) 60"(1524) 54 1/8"(1375)		
	SWCPF4260-28 SWPOCPF4260-28	SWCPF5460-28 SWPOCPF5460-28
68 15/16"(1751) 70 7/16"(1789) 66 3/4"(1695) 66"(1676) 60 1/8"(1527)		
	SWCPF4266-28 SWPOCPF4266-28	SWCPF5466-28 SWPOCPF5466-28

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS



PICTURE WITH 30" FLANKER

MO BRICKMOLD	105 1/2"(2680)	117 1/2"(2985)
MO FLAT CASING	108 1/2"(2756)	120 1/2"(3061)
ROUGH OPENING	102 3/4"(2610)	114 3/4"(2915)
FRAME SIZE	102"(2590)	114"(2896)
DAYLIGHT OPENING	24 1/8"(613)[2] 36 1/8"(918)	24 1/8"(613)[2] 48 1/8"(1222)

44 15/16"(1141) 46 7/16"(1180) 42 3/4"(1086) 42"(1067) 36 1/8"(918)		
	SWCPF4242-30 SWPOCPF4242-30	SWCPF5442-30 SWPOCPF5442-30
50 15/16"(1294) 52 7/16"(1332) 48 3/4"(1238) 48"(1219) 42 1/8"(1070)		
	SWCPF4248-30 SWPOCPF4248-30	SWCPF5448-30 SWPOCPF5448-30
56 15/16"(1446) 58 7/16"(1484) 54 3/4"(1391) 54"(1372) 48 1/8"(1222)		
	SWCPF4254-30 SWPOCPF4254-30	SWCPF5454-30 SWPOCPF5454-30
62 15/16"(1589) 64 7/16"(1637) 60 3/4"(1543) 60"(1524) 54 1/8"(1375)		
	SWCPF4260-30 SWPOCPF4260-30	SWCPF5460-30 SWPOCPF5460-30
68 15/16"(1751) 70 7/16"(1789) 66 3/4"(1695) 66"(1676) 60 1/8"(1527)		
	SWCPF4266-30 SWPOCPF4266-30	SWCPF5466-30 SWPOCPF5466-30

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS