

















































TABLE OF CONTENTS

Single Units	6-18
2 Wide Units	6-22
3 Wide Units	6-25
Picture Units	6-29
Picture Units with 16" Flankers.	6-38
Picture Units with 20" Flankers.	6-39
Picture Radius Units	6-40
Transom Units	6-49
Sector Top Units.	6-52
2 Wide Sector Top Units	6-56
3 Wide Sector Top Units	6-59
Single Radius Units	6-63

SINGLE UNITS ELEVATIONS

	M.O. BRICKMOULD 24 7/8"(632)	28 7/8"(733)	32 7/8"(835)	34 7/8"(886)	36 7/8"(937)	40 7/8"(1038)	44 7/8"(1140)
	M.O. ADAMS/FLAT CASING 27 7/8"(708)	31 7/8"(810)	35 7/8"(911)	37 7/8"(962)	39 7/8"(1013)	43 7/8"(1114)	47 7/8"(1216)
	ROUGH OPENING 21 3/8"(543)	25 3/8"(645)	30 1/8"(765)	32 1/8"(816)	34 1/8"(867)	38 1/8"(968)	42 1/8"(1070)
	FRAME SIZE 14 13/16"(376)	18 13/16"(478)	22 13/16"(579)	24 13/16"(630)	26 13/16"(681)	30 13/16"(783)	34 13/16"(884)
	DAYLIGHT OPENING 34 13/16"(884)	36 5/16"(922)	32 7/8"(835)	34 7/8"(886)	36 7/8"(937)	40 7/8"(1038)	44 7/8"(1140)
	36 5/16"(922)	32 7/8"(835)	35 7/8"(911)	37 7/8"(962)	39 7/8"(1013)	43 7/8"(1114)	47 7/8"(1216)
	32 7/8"(835)	28 7/8"(733)	30 1/8"(765)	32 1/8"(816)	34 1/8"(867)	38 1/8"(968)	42 1/8"(1070)
	11 1/4"(286) [2]	13 1/4"(339) [2]	15 1/4"(389) [2]	17 1/4"(439) [2]	19 1/4"(489) [2]	21 1/4"(537) [2]	23 1/4"(587) [2]
							
	SWD2132	SWD2532	SWD2932	SWD3132	SWD3332	SWD3732	SWD4132
							
	SWD2136	SWD2536	SWD2936	SWD3136	SWD3336	SWD3736	SWD4136
							
	SWD2140	SWD2540	SWD2940	SWD3140	SWD3340	SWD3740	SWD4140
							
	SWD2144	SWD2544	SWD2944	SWD3144	SWD3344	SWD3744	SWD4144
							
	SWD2148	SWD2548	SWD2948	SWD3148	SWD3348	SWD3748	SWD4148
							
	SWD2152	SWD2552	SWD2952	SWD3152	SWD3352	SWD3752	SWD4152
							
	SWD2156	SWD2556	SWD2956	SWD3156	SWD3356	SWD3756	SWD4156

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- # NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O. (Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

SINGLE UNITS ELEVATIONS

M.O. BRICKMOULD 24 7/8"(632)
M.O. ADAMS/FLAT CASING 27 7/8"(708)
ROUGH OPENING 22 1/8"(562)
FRAME SIZE 21 3/8"(543)
DAYLIGHT OPENING 14 13/16"(376)

28 7/8"(733)
31 7/8"(810)
26 1/8"(664)
25 3/8"(645)
18 13/16"(478)

32 7/8"(835)
35 7/8"(911)
30 1/8"(765)
29 3/8"(670)
22 13/16"(579)


34 7/8"(886)
37 7/8"(962)
32 1/8"(816)
31 3/8"(797)
24 13/16"(630)

36 7/8"(937)
39 7/8"(1013)
34 1/8"(867)
33 3/8"(848)
26 13/16"(681)


40 7/8"(1038)
43 7/8"(1114)
38 1/8"(968)
37 3/8"(949)
30 13/16"(783)

44 7/8"(1140)
47 7/8"(1216)
42 1/8"(1070)
41 3/8"(1051)
34 13/16"(884)


62 13/16"(1595)
64 5/16"(1634)
60 3/4"(1543)
60"(1524)
25 1/4"(639)[2]




SWD2160




SWD2560




SWD2960




SWD3160



SWD3360




SWD3760




SWD4160


66 13/16"(1697)
68 5/16"(1735)
64 3/4"(1645)
64"(1626)
27 1/4"(689)[2]




SWD2164




SWD2564




SWD2964




SWD3164



SWD3364




SWD3764




SWD4164


70 13/16"(1799)
72 5/16"(1837)
68 3/4"(1746)
68"(1727)
29 1/4"(740)[2]




SWD2168




SWD2568




SWD2968




SWD3168



SWD3368




SWD3768




SWD4168


70 13/16"(1799)
72 5/16"(1837)
68 3/4"(1746)
68"(1727)
35 1/4"(892) 23 1/4"(587)




SWD2168




SWD2568




SWD2968




SWD3168



SWD3368




SWD3768




SWD4168


74 13/16"(1900)
76 5/16"(1938)
72 3/4"(1848)
72"(1829)
31 1/4"(791)[2]




SWD2172




SWD2572




SWD2972




SWD3172



SWD3372



SWD3772



SWD4172

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

SINGLE UNITS ELEVATIONS

M.O. BRICKMOULD 24 7/8"(632)
M.O. ADAMS/FLAT CASING 27 7/8"(708)
ROUGH OPENING 22 1/8"(562)
FRAME SIZE 21 3/8"(543)
DAYLIGHT OPENING 14 13/16"(376)

28 7/8"(733)
31 7/8"(810)
26 1/8"(664)
25 3/8"(645)
18 13/16"(478)

32 7/8"(835)
35 7/8"(911)
30 1/8"(765)
29 3/8"(760)
22 13/16"(579)


34 7/8"(896)
37 7/8"(962)
34 1/8"(867)
31 3/8"(797)
24 13/16"(630)

36 7/8"(937)
39 7/8"(1013)
34 1/8"(867)
33 3/8"(848)
26 13/16"(681)


40 7/8"(1038)
43 7/8"(1114)
38 1/8"(968)
37 3/8"(949)
30 13/16"(783)

44 7/8"(1140)
47 7/8"(1216)
42 1/8"(1070)
41 3/8"(1051)
34 13/16"(884)


78 13/16"(2002)
80 5/16"(2040)
76 3/4"(1949)
76"(1930)
33 1/4"(841)|2|




SWD2176




SWD2576




SWD2976




SWD3176



SWD3376




SWD3776




SWD4176


82 13/16"(2103)
84 5/16"(2142)
80 3/4"(2051)
80"(2032)
35 1/4"(892)|2|




SWD2180




SWD2580




SWD2980




SWD3180



SWD3380




SWD3780




SWD4180


90 13/16"(2307)
92 5/16"(2345)
88 3/4"(2254)
88"(2235)
39 1/4"(994)|2|




SWD2188




SWD2588




SWD2988




SWD3188



SWD3388




SWD3788

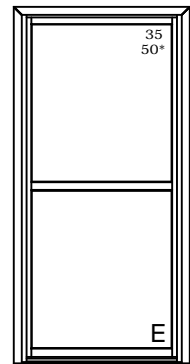


SWD4188


94 13/16"(2408)
96 5/16"(2446)
92 3/4"(2356)
92"(2337)
41 1/4"(1045)|2|




SWD2192




SWD2592




SWD2992




SWD3192



SWD3392



SWD3792

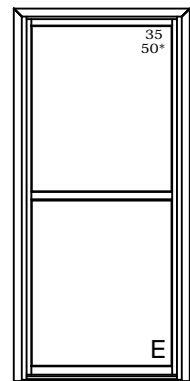

SWD4192


ELEVATION SYMBOL LEGEND:

VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O. (Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


SINGLE UNITS ELEVATIONS

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)




SWD4532




SWD4536




SWD4540




SWD4544



SWD4548




SWD4552




SWD4556

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)




SWD4560




SWD4564



SWD4568




SWD4568




SWD4572

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)




SWD4576



SWD4580



SWD4588



SWD4592

ELEVATION SYMBOL LEGEND:

VALUES IN () ARE IN MILLIMETER CONVERSIONS

E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS

NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

2 WIDE UNITS
ELEVATIONS

MO BRICKMOLD	46 1/4"(1175)	54 1/4"(1378)	62 1/4"(1581)	66 1/4"(1683)	70 1/4"(1784)	78 1/4"(1988)	86 1/4"(2191)
MO FLAT CASING	49 1/4"(1251)	57 1/4"(1454)	65 1/4"(1657)	69 1/4"(1759)	73 1/4"(1861)	81 1/4"(2064)	89 1/4"(2267)
ROUGH OPENING	43 1/2"(1105)	51 1/2"(1308)	59 1/2"(1511)	63 1/2"(1613)	67 1/2"(1715)	75 1/2"(1918)	83 1/2"(2121)
FRAME SIZE	42 3/4"(1086)	50 3/4"(1289)	58 3/4"(1492)	62 3/4"(1594)	66 3/4"(1695)	74 3/4"(1898)	82 3/4"(2102)
DAYLIGHT OPENING	14 13/16"(376)[2]	18 13/16"(478)[2]	22 13/16"(579)[2]	24 13/16"(630)[2]	26 13/16"(681)[2]	30 13/16"(783)[2]	34 13/16"(884)[2]

70 13/16"(1799) 72 5/16"(1837) 68 3/4"(1746) 68"(1727) 35 1/4"(895) 23 1/4"(590)							
74 13/16"(1900) 76 5/16"(1938) 72 3/4"(1848) 72"(1829) 31 1/4"(794)[2]							
78 13/16"(2002) 80 5/16"(2040) 76 3/4"(1949) 76"(1930) 33 1/4"(841)[2]							
82 13/16"(2103) 84 5/16"(2142) 80 3/4"(2051) 80"(2032) 35 1/4"(895)[2]							
90 13/16"(2307) 92 5/16"(2345) 88 3/4"(2254) 88"(2235) 39 1/4"(997)[2]							
94 13/16"(2408) 96 5/16"(2446) 92 3/4"(2356) 92"(2337) 41 1/4"(1048)[2]							

ELEVATION SYMBOL LEGEND:
M.O. = MASONRY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E I BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

2 WIDE UNITS
ELEVATIONS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

94 1/4"(2394)
97 1/4"(2470)
91 1/2"(2324)
90 3/4"(2305)
38 13/16"(986)[2]

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

94 1/4"(2394)
97 1/4"(2470)
91 1/2"(2324)
90 3/4"(2305)
38 13/16"(986)[2]

34 13/16"(884) 36 5/16"(922) 32 3/4"(832) 32"(813) 11 1/4"(286)[2]	
38 13/16"(986) 40 5/16"(1024) 36 3/4"(933) 36"(914) 13 1/4"(336)[2]	
42 13/16"(1087) 44 5/16"(1126) 40 3/4"(1035) 40"(1016) 15 1/4"(387)[2]	
46 13/16"(1189) 48 5/16"(1227) 44 3/4"(1137) 44"(1118) 17 1/4"(438)[2]	
50 13/16"(1291) 52 5/16"(1329) 48 3/4"(1238) 48"(1219) 19 1/4"(489)[2]	
54 13/16"(1392) 56 5/16"(1430) 52 3/4"(1340) 52"(1321) 21 1/4"(540)[2]	
58 13/16"(1494) 60 5/16"(1532) 56 3/4"(1441) 56"(1422) 23 1/4"(590)[2]	
62 13/16"(1595) 64 5/16"(1634) 60 3/4"(1543) 60"(1524) 25 1/4"(641)[2]	
66 13/16"(1697) 68 5/16"(1735) 64 3/4"(1645) 64"(1626) 27 1/4"(692)[2]	
70 13/16"(1799) 72 5/16"(1837) 68 3/4"(1746) 68"(1727) 29 1/4"(743)[2]	

70 13/16"(1799) 72 5/16"(1837) 68 3/4"(1746) 68"(1727) 35 1/4"(895) 23 1/4"(590)	
74 13/16"(1900) 76 5/16"(1938) 72 3/4"(1848) 72"(1829) 31 1/4"(794)[2]	
78 13/16"(1986) 79 11/16"(2024) 76 3/4"(1945) 76"(1930) 33 1/4"(841)[2]	
82 13/16"(2103) 84 5/16"(2142) 80 3/4"(2051) 80"(2032) 35 1/4"(895)[2]	
86 13/16"(2207) 88 11/16"(2245) 84 3/4"(2154) 84"(2135) 39 1/4"(997)[2]	
90 13/16"(2307) 92 11/16"(2345) 88 3/4"(2254) 88"(2235) 39 1/4"(997)[2]	
94 13/16"(2408) 96 5/16"(2446) 92 3/4"(2356) 92"(2337) 41 1/4"(1048)[2]	

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E I BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

3 WIDE UNITS
ELEVATIONS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

67 5/8"(1718)
70 5/8"(1794)
64 7/8"(1648)
64 1/8"(1629)
14 13/16"(376)[3]

79 5/8"(2022)
82 5/8"(2099)
76 7/8"(1953)
76 1/8"(1934)
18 13/16"(478)[3]

91 5/8"(2327)
94 5/8"(2403)
88 7/8"(2257)
88 1/8"(1492)
22 13/16"(579)[3]

97 5/8"(2481)
100 5/8"(2556)
94 7/8"(2410)
94 1/8"(1594)
24 13/16"(630)[3]

103 5/8"(2632)
106 5/8"(2708)
100 7/8"(2562)
100 1/8"(1543)
26 13/16"(681)[3]

115 5/8"(2937)
118 5/8"(3013)
112 7/8"(2867)
112 1/8"(1899)
30 13/16"(783)[3]

34 13/16"(884)	34 13/16"(884)	34 13/16"(884)	34 13/16"(884)	34 13/16"(884)	34 13/16"(884)
36 5/16"(922)	36 5/16"(922)	36 5/16"(922)	36 5/16"(922)	36 5/16"(922)	36 5/16"(922)
32 3/4"(832)	32 3/4"(832)	32 3/4"(832)	32 3/4"(832)	32 3/4"(832)	32 3/4"(832)
38 13/16"(986)	38 13/16"(986)	38 13/16"(986)	38 13/16"(986)	38 13/16"(986)	38 13/16"(986)
40 5/16"(1024)	40 5/16"(1024)	40 5/16"(1024)	40 5/16"(1024)	40 5/16"(1024)	40 5/16"(1024)
36 3/4"(933)	36 3/4"(933)	36 3/4"(933)	36 3/4"(933)	36 3/4"(933)	36 3/4"(933)
38 13/16"(1087)	38 13/16"(1087)	38 13/16"(1087)	38 13/16"(1087)	38 13/16"(1087)	38 13/16"(1087)
44 5/16"(1126)	44 5/16"(1126)	44 5/16"(1126)	44 5/16"(1126)	44 5/16"(1126)	44 5/16"(1126)
40 3/4"(1035)	40 3/4"(1035)	40 3/4"(1035)	40 3/4"(1035)	40 3/4"(1035)	40 3/4"(1035)
42 13/16"(1189)	42 13/16"(1189)	42 13/16"(1189)	42 13/16"(1189)	42 13/16"(1189)	42 13/16"(1189)
48 5/16"(1227)	48 5/16"(1227)	48 5/16"(1227)	48 5/16"(1227)	48 5/16"(1227)	48 5/16"(1227)
44 3/4"(1137)	44 3/4"(1137)	44 3/4"(1137)	44 3/4"(1137)	44 3/4"(1137)	44 3/4"(1137)
48 13/16"(1321)	48 13/16"(1321)	48 13/16"(1321)	48 13/16"(1321)	48 13/16"(1321)	48 13/16"(1321)
52 5/16"(1329)	52 5/16"(1329)	52 5/16"(1329)	52 5/16"(1329)	52 5/16"(1329)	52 5/16"(1329)
48 3/4"(1238)	48 3/4"(1238)	48 3/4"(1238)	48 3/4"(1238)	48 3/4"(1238)	48 3/4"(1238)
50 13/16"(1291)	50 13/16"(1291)	50 13/16"(1291)	50 13/16"(1291)	50 13/16"(1291)	50 13/16"(1291)
52 5/16"(1392)	52 5/16"(1392)	52 5/16"(1392)	52 5/16"(1392)	52 5/16"(1392)	52 5/16"(1392)
56 5/16"(1430)	56 5/16"(1430)	56 5/16"(1430)	56 5/16"(1430)	56 5/16"(1430)	56 5/16"(1430)
52 3/4"(1340)	52 3/4"(1340)	52 3/4"(1340)	52 3/4"(1340)	52 3/4"(1340)	52 3/4"(1340)
58 13/16"(1494)	58 13/16"(1494)	58 13/16"(1494)	58 13/16"(1494)	58 13/16"(1494)	58 13/16"(1494)
60 5/16"(1532)	60 5/16"(1532)	60 5/16"(1532)	60 5/16"(1532)	60 5/16"(1532)	60 5/16"(1532)
56 3/4"(1441)	56 3/4"(1441)	56 3/4"(1441)	56 3/4"(1441)	56 3/4"(1441)	56 3/4"(1441)
56 1/4"(1422)	56 1/4"(1422)	56 1/4"(1422)	56 1/4"(1422)	56 1/4"(1422)	56 1/4"(1422)
62 13/16"(1595)	62 13/16"(1595)	62 13/16"(1595)	62 13/16"(1595)	62 13/16"(1595)	62 13/16"(1595)
64 5/16"(1634)	64 5/16"(1634)	64 5/16"(1634)	64 5/16"(1634)	64 5/16"(1634)	64 5/16"(1634)
60 3/4"(1543)	60 3/4"(1543)	60 3/4"(1543)	60 3/4"(1543)	60 3/4"(1543)	60 3/4"(1543)
60 7/8"(1524)	60 7/8"(1524)	60 7/8"(1524)	60 7/8"(1524)	60 7/8"(1524)	60 7/8"(1524)
25 1/4"(641)[2]	25 1/4"(641)[2]	25 1/4"(641)[2]	25 1/4"(641)[2]	25 1/4"(641)[2]	25 1/4"(641)[2]
66 13/16"(1697)	66 13/16"(1697)	66 13/16"(1697)	66 13/16"(1697)	66 13/16"(1697)	66 13/16"(1697)
68 5/16"(1735)	68 5/16"(1735)	68 5/16"(1735)	68 5/16"(1735)	68 5/16"(1735)	68 5/16"(1735)
64 3/4"(1645)	64 3/4"(1645)	64 3/4"(1645)	64 3/4"(1645)	64 3/4"(1645)	64 3/4"(1645)
64 1/2"(1626)	64 1/2"(1626)	64 1/2"(1626)	64 1/2"(1626)	64 1/2"(1626)	64 1/2"(1626)
27 1/4"(693)[2]	27 1/4"(693)[2]	27 1/4"(693)[2]	27 1/4"(693)[2]	27 1/4"(693)[2]	27 1/4"(693)[2]
70 13/16"(1799)	70 13/16"(1799)	70 13/16"(1799)	70 13/16"(1799)	70 13/16"(1799)	70 13/16"(1799)
72 5/16"(1837)	72 5/16"(1837)	72 5/16"(1837)	72 5/16"(1837)	72 5/16"(1837)	72 5/16"(1837)
68 3/4"(1746)	68 3/4"(1746)	68 3/4"(1746)	68 3/4"(1746)	68 3/4"(1746)	68 3/4"(1746)
68 1/2"(1727)	68 1/2"(1727)	68 1/2"(1727)	68 1/2"(1727)	68 1/2"(1727)	68 1/2"(1727)
29 1/4"(743)[2]	29 1/4"(743)[2]	29 1/4"(743)[2]	29 1/4"(743)[2]	29 1/4"(743)[2]	29 1/4"(743)[2]

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

3 WIDE UNITS
ELEVATIONS

MO BRICKMOLD	67 5/8" (1718)	79 5/8" (2022)	91 5/8" (2327)	97 5/8" (2481)	103 5/8" (2632)	115 5/8" (2937)
MO FLAT CASING	70 5/8" (1794)	82 5/8" (2099)	94 5/8" (2403)	100 5/8" (2556)	106 5/8" (2708)	118 5/8" (3013)
ROUGH OPENING	64 7/8" (1648)	76 7/8" (1953)	88 7/8" (2257)	94 7/8" (2410)	100 7/8" (2562)	112 7/8" (2867)
FRAME SIZE	64 1/8" (1629)	76 1/8" (1934)	88 1/8" (1492)	94 1/8" (1594)	100 1/8" (2543)	112 1/8" (1899)
DAYLIGHT OPENING	14 13/16" (376)[3]	18 13/16" (478)[3]	22 13/16" (579)[3]	24 13/16" (630)[3]	26 13/16" (681)[3]	30 13/16" (783)[3]

70 13/16" (1799) 72 5/16" (1837) 68 3/4" (1746) 68" (1727) 35 1/4" (895) 23 1/4" (590)						
74 13/16" (1900) 76 5/16" (1938) 72 3/4" (1848) 72" (1829) 31 1/4" (794)[2]						
78 13/16" (2002) 80 5/16" (2040) 76 3/4" (1949) 76" (1930) 33 1/4" (841)[2]						
82 13/16" (2103) 84 5/16" (2142) 80 3/4" (2051) 80" (2032) 35 1/4" (895)[2]						
90 13/16" (2307) 92 5/16" (2345) 88 3/4" (2254) 88" (2235) 39 1/4" (997)[2]						
94 13/16" (2408) 96 5/16" (2446) 92 3/4" (2356) 92" (2337) 41 1/4" (1048)[2]						

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E 1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

3 WIDE UNITS
ELEVATIONS

MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

127 5/8"(3242)
130 5/8"(3318)
124 7/8"(3172)
124 1/8"(3153)
34 13/16"(884)[3]

139 5/8"(3546)
142 5/8"(3623)
136 7/8"(3477)
136 1/8"(3458)
38 13/16"(986)[3]

34 13/16"(884)		
36 5/16"(922)		
38 13/16"(986)		
40 5/16"(1024)		
42 13/16"(1087)		
44 5/16"(1126)		
46 13/16"(1189)		
48 5/16"(1227)		
50 13/16"(1291)		
52 5/16"(1329)		
54 13/16"(1392)		
56 5/16"(1430)		
58 13/16"(1494)		
60 5/16"(1532)		
62 13/16"(1595)		
64 5/16"(1634)		
66 13/16"(1697)		
68 5/16"(1735)		
70 13/16"(1799)		
72 5/16"(1837)		

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E 1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Opening page.

3 WIDE UNITS
ELEVATIONS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

127 5/8"(3242)
130 5/8"(3318)
124 7/8"(3172)
124 1/8"(3153)
34 13/16"(884)[3]

139 5/8"(3546)
142 5/8"(3623)
136 7/8"(3477)
136 1/8"(3458)
38 13/16"(986)[3]

70 13/16"(1789) 72 5/16"(1837) 68 3/4"(1746) 68"(1727) 35 1/4"(895) 23 1/4"(590)		
74 13/16"(1900) 76 5/16"(1938) 72 3/4"(1848) 72"(1829) 31 1/4"(794)[2]		
78 13/16"(2002) 80 5/16"(2040) 76 3/4"(1949) 76"(1930) 33 1/4"(841)[2]		
82 13/16"(2103) 84 5/16"(2142) 80 3/4"(2051) 80"(2032) 35 1/4"(895)[2]		
90 13/16"(2307) 92 5/16"(2345) 88 3/4"(2254) 88"(2235) 39 1/4"(997)[2]		
94 13/16"(2408) 96 5/16"(2446) 92 3/4"(2356) 92"(2337) 41 1/4"(1048)[2]		

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E 1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE ELEVATIONS

	M.O. BRICKMOULD	24 7/8"(632)	28 7/8"(733)	32 7/8"(835)	34 7/8"(886)	36 7/8"(937)	40 7/8"(1038)	44 7/8"(1140)
	M.O. ADAMS/FLAT CASING	27 7/8"(708)	31 7/8"(810)	35 7/8"(911)	37 7/8"(962)	39 7/8"(1013)	43 7/8"(1114)	47 7/8"(1216)
	ROUGH OPENING	22 1/8"(562)	26 1/8"(664)	30 1/8"(765)	32 1/8"(816)	34 1/8"(867)	38 1/8"(968)	42 1/8"(1070)
	FRAME SIZE	21 3/8"(543)	25 3/8"(645)	29 3/8"(747)	31 3/8"(797)	33 3/8"(848)	37 3/8"(949)	41 3/8"(1051)
	DAYLIGHT OPENING	14 13/16"(376)	18 13/16"(478)	22 13/16"(579)	24 13/16"(630)	26 13/16"(681)	30 13/16"(783)	34 13/16"(884)
34 13/16"(884) 36 5/16"(922) 32 3/4"(852) 32"(813) 24 27/32"(631)								
38 13/16"(986) 40 5/16"(1024) 36 3/4"(933) 36"(914) 28 27/32"(733)								
42 13/16"(1087) 44 5/16"(1126) 40 3/4"(1035) 40"(1016) 32 27/32"(834)								
46 13/16"(1189) 48 5/16"(1227) 44 3/4"(1137) 44"(1118) 36 27/32"(936)								
50 13/16"(1291) 52 5/16"(1329) 48 3/4"(1238) 48"(1219) 40 27/32"(1037)								
54 13/16"(1392) 56 5/16"(1430) 52 3/4"(1340) 52"(1321) 44 27/32"(1139)								
58 13/16"(1494) 60 5/16"(1532) 56 3/4"(1441) 56"(1422) 48 27/32"(1241)								

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- # NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O. (Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE ELEVATIONS

M.O. BRICKMOULD 24 7/8"(632)
M.O. ADAMS/FLAT CASING 27 7/8"(708)
ROUGH OPENING 22 1/8"(562)
FRAME SIZE 21 3/8"(543)
DAYLIGHT OPENING 14 13/16"(376)

28 7/8"(733)
31 7/8"(810)
26 1/8"(664)
25 3/8"(645)
18 13/16"(478)

32 7/8"(835)
35 7/8"(911)
30 1/8"(765)
29 3/8"(670)
22 13/16"(579)








34 7/8"(886)
37 7/8"(962)
32 1/8"(816)
31 3/8"(797)
24 13/16"(630)

36 7/8"(937)
39 7/8"(1013)
34 1/8"(867)
33 3/8"(848)
26 13/16"(681)








40 7/8"(1038)
43 7/8"(1114)
38 1/8"(968)
37 3/8"(949)
30 13/16"(783)

44 7/8"(1140)
47 7/8"(1216)
42 1/8"(1070)
41 3/8"(1051)
34 13/16"(884)








62 13/16"(1595)
64 5/16"(1634)
60 3/4"(1543)
60"(1524)
52 27/32"(1342)










66 13/16"(1697)
68 5/16"(1735)
64 3/4"(1645)
64"(1626)
56 27/32"(1444)










70 13/16"(1799)
72 5/16"(1837)
68 3/4"(1746)
68"(1727)
60 27/32"(1545)



74 13/16"(1900)
76 5/16"(1938)
72 3/4"(1848)
72"(1829)
64 27/32"(1647)



78 13/16"(2002)
80 5/16"(2040)
76 3/4"(1949)
76"(1930)
68 27/32"(1749)



ELEVATION SYMBOL LEGEND:

VALUES IN () ARE IN MILLIMETER CONVERSIONS

- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE ELEVATIONS

	24 7/8"(632)	28 7/8"(733)	32 7/8"(835)	34 7/8"(886)	36 7/8"(937)	40 7/8"(1038)	44 7/8"(1140)
M.O. BRICKMOULD	24 7/8"(632)	28 7/8"(733)	32 7/8"(835)	34 7/8"(886)	36 7/8"(937)	40 7/8"(1038)	44 7/8"(1140)
M.O. ADAMS/FLAT CASING	27 7/8"(708)	31 7/8"(810)	35 7/8"(911)	37 7/8"(962)	39 7/8"(1013)	43 7/8"(1114)	47 7/8"(1216)
ROUGH OPENING	22 1/8"(562)	26 1/8"(664)	30 1/8"(765)	32 1/8"(816)	34 1/8"(867)	38 1/8"(968)	42 1/8"(1070)
FRAME SIZE	21 3/8"(543)	25 3/8"(645)	29 3/8"(747)	31 3/8"(797)	33 3/8"(848)	37 3/8"(949)	41 3/8"(1051)
DAYLIGHT OPENING	14 13/16"(376)	18 13/16"(478)	22 13/16"(579)	24 13/16"(630)	26 13/16"(681)	30 13/16"(783)	34 13/16"(884)

82 13/16"(2103)	84 1/2"(2142)	80 3/4"(2061)	80"(2032)	72 27/32"(1860)			
SWDP2180	SWDP2580	SWDP2980	SWDP3180	SWDP3380	SWDP3780	SWDP4180	
90 13/16"(2307)	92 5/16"(2345)	88 3/4"(2254)	88"(2235)	80 27/32"(2053)			
SWDP2188	SWDP2588	SWDP2988	SWDP3188	SWDP3388	SWDP3788	SWDP4188	
94 13/16"(2408)	96 5/16"(2446)	92 3/4"(2355)	92"(2337)	84 27/32"(2155)			
SWDP2192	SWDP2592	SWDP2992	SWDP3192	SWDP3392	SWDP3792	SWDP4192	

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- # NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE ELEVATIONS





























M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)

52 7/8"(1343)
55 7/8"(1419)
50 1/8"(1273)
49 3/8"(1254)
42 13/16"(1087)

56 7/8"(1445)
59 7/8"(1521)
54 1/8"(1375)
53 3/8"(1356)
46 13/16"(1189)

64 7/8"(1648)
67 7/8"(1724)
62 1/8"(1578)
61 3/8"(1559)
54 13/16"(1392)

<p>34 13/16"(884) 36 5/16"(922) 32 3/4"(832) 32"(813) 24 27/32"(631)</p>  <p>SWDP4532</p>	<p>35 50"</p>  <p>SWDP4932</p>	<p>35 50"</p>  <p>SWDP5332</p>	<p>35 50"</p>  <p>SWDP6132</p>
<p>38 13/16"(986) 40 5/16"(1024) 36 3/4"(933) 36"(914) 28 27/32"(733)</p>  <p>SWDP4536</p>	<p>35 50"</p>  <p>SWDP4936</p>	<p>35 50"</p>  <p>SWDP5336</p>	<p>35 50"</p>  <p>SWDP6136</p>
<p>42 13/16"(1087) 44 5/16"(1126) 40 3/4"(1035) 40"(1016) 32 27/32"(834)</p>  <p>SWDP4540</p>	<p>35 50"</p>  <p>SWDP4940</p>	<p>35 50"</p>  <p>SWDP5340</p>	<p>35 50"</p>  <p>SWDP6140</p>
<p>46 13/16"(1189) 48 5/16"(1227) 44 3/4"(1137) 44"(1118) 36 27/32"(936)</p>  <p>SWDP4544</p>	<p>35 50"</p>  <p>SWDP4944</p>	<p>35 50"</p>  <p>SWDP5344</p>	<p>35 50"</p>  <p>SWDP6144</p>
<p>50 13/16"(1291) 52 5/16"(1329) 48 3/4"(1238) 48"(1219) 40 27/32"(1037)</p>  <p>SWDP4548</p>	<p>35 50"</p>  <p>SWDP4948</p>	<p>35 50"</p>  <p>SWDP5348</p>	<p>35 50"</p>  <p>SWDP6148</p>
<p>54 13/16"(1392) 56 5/16"(1430) 52 3/4"(1340) 52"(1321) 44 27/32"(1139)</p>  <p>SWDP4552</p>	<p>35 50"</p>  <p>SWDP4952</p>	<p>35 50"</p>  <p>SWDP5352</p>	<p>35 50"</p>  <p>SWDP6152</p>
<p>58 13/16"(1494) 60 5/16"(1532) 56 3/4"(1441) 56"(1422) 48 27/32"(1241)</p>  <p>SWDP4556</p>	<p>35 50"</p>  <p>SWDP4956</p>	<p>35 50"</p>  <p>SWDP5356</p>	<p>35 50"</p>  <p>SWDP6156</p>

ELEVATION SYMBOL LEGEND:

VALUES IN () ARE IN MILLIMETER CONVERSIONS

- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE ELEVATIONS

M.O. BRICKMOUND
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)

52 7/8"(1343)
55 7/8"(1419)
50 1/8"(1273)
49 3/8"(1254)
42 13/16"(1087)


56 7/8"(1445)
59 7/8"(1521)
54 1/8"(1375)
53 3/8"(1356)
46 13/16"(1189)

64 7/8"(1648)
67 7/8"(1724)
62 1/8"(1578)
61 3/8"(1559)
54 13/16"(1392)


62 13/16"(1595)
64 5/16"(1634)
60 1/8"(1545)
52 27/32"(1342)




SWDP4560



SWDP4960




SWDP5360




SWDP6160


66 13/16"(1697)
68 5/16"(1735)
64 1/8"(1646)
56 27/32"(1444)




SWDP4564



SWDP4964




SWDP5364




SWDP6164


70 13/16"(1799)
72 5/16"(1837)
68 1/8"(1748)
60 27/32"(1545)




SWDP4568



SWDP4968




SWDP5368




SWDP6168


74 13/16"(1900)
76 5/16"(1938)
72 1/8"(1849)
64 27/32"(1647)




SWDP4572



SWDP4972




SWDP5372




SWDP6172


78 13/16"(2002)
80 5/16"(2040)
76 1/8"(1951)
68 27/32"(1749)




SWDP4576



SWDP4976



SWDP5376



SWDP6176

ELEVATION SYMBOL LEGEND:

VALUES IN () ARE IN MILLIMETER CONVERSIONS

E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS

NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O. (Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE ELEVATIONS

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)

52 7/8"(1343)
55 7/8"(1419)
50 1/8"(1273)
49 3/8"(1254)
42 13/16"(1087)


56 7/8"(1445)
59 7/8"(1521)
54 1/8"(1375)
53 3/8"(1356)
46 13/16"(1189)

64 7/8"(1648)
67 7/8"(1724)
62 1/8"(1578)
61 3/8"(1559)
54 13/16"(1392)


82 13/16"(2103)
84 5/16"(2142)
80 3/4"(2051)
72 27/32"(1850)




SWDP4580



SWDP4980




SWDP5380




SWDP6180


80 13/16"(2307)
82 5/16"(2346)
80 3/4"(2254)
80 27/32"(2053)

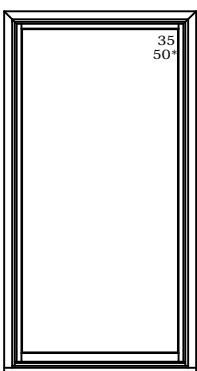


SWDP4588

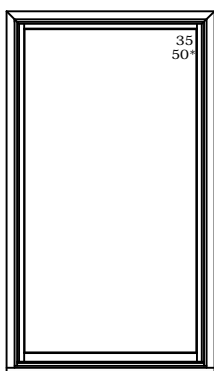

SWDP4988

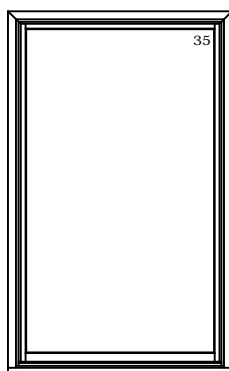


SWDP5388

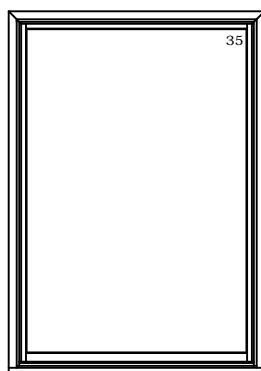


SWDP6188


84 13/16"(2408)
86 5/16"(2446)
84 3/4"(2354)
84 27/32"(2155)




SWDP4592

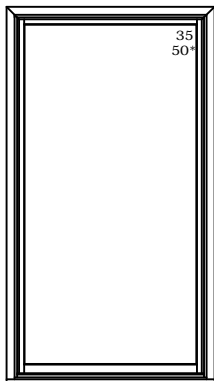

SWDP4992

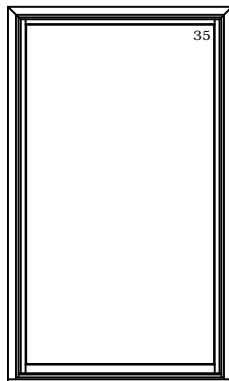

SWDP5392

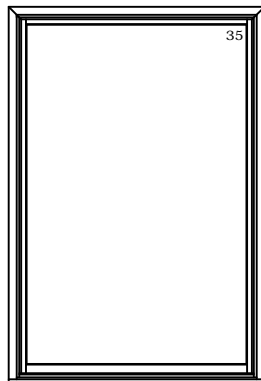

SWDP6192

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING


Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE ELEVATIONS

M.O. BRICKMOLD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

72 7/8"(1851)
75 7/8"(1927)
70 1/8"(1781)
69 3/8"(1762)
62 13/16"(1595)

80 7/8"(2054)
83 7/8"(2130)
78 1/8"(1984)
77 3/8"(1965)
70 13/16"(1799)

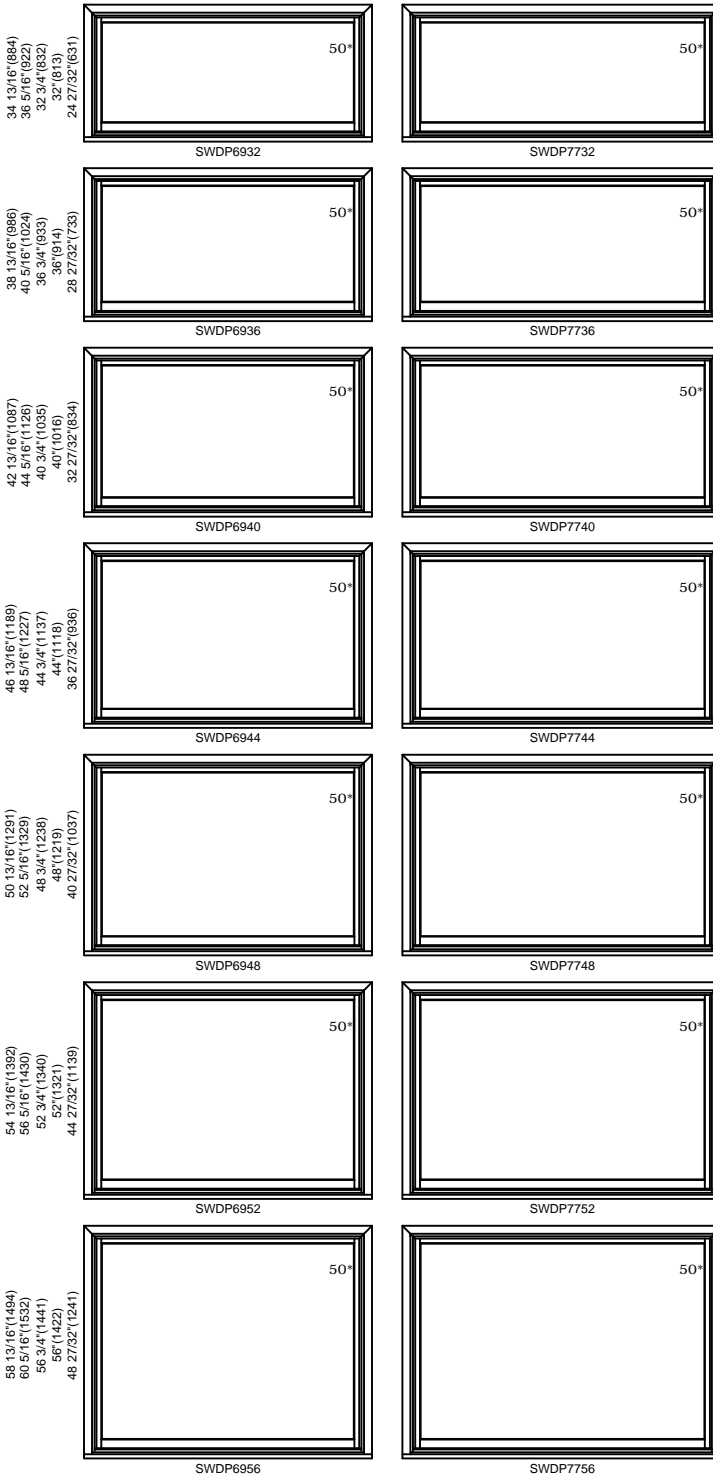

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- # NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


PICTURE ELEVATIONS

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


72 7/8"(1851)
75 7/8"(1927)
70 1/8"(1781)
69 3/8"(1762)
62 13/16"(1595)

80 7/8"(2054)
83 7/8"(2130)
78 1/8"(1984)
77 3/8"(1965)
70 13/16"(1799)

62 13/16"(1595)
64 5/16"(1634)
60 3/4"(1543)
60"(1524)
52 27/32"(1342)




SWDP6960




SWDP7760

66 13/16"(1697)
68 5/16"(1735)
64 3/4"(1645)
64"(1626)
56 27/32"(1444)




SWDP6964




SWDP7764

70 13/16"(1799)
72 5/16"(1837)
68 3/4"(1746)
68"(1727)
60 27/32"(1545)




SWDP6968




SWDP7768

74 13/16"(1900)
76 5/16"(1938)
72 3/4"(1848)
72"(1829)
64 27/32"(1647)




SWDP6972




SWDP7772

78 13/16"(2002)
80 5/16"(2040)
76 3/4"(1949)
76"(1930)
68 27/32"(1748)



SWDP6976



SWDP7776

ELEVATION SYMBOL LEGEND:

VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


PICTURE ELEVATIONS

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


72 7/8"(1851)
75 7/8"(1927)
70 1/8"(1781)
69 3/8"(1762)
62 13/16"(1595)

80 7/8"(2054)
83 7/8"(2130)
78 1/8"(1984)
77 3/8"(1965)
70 13/16"(1799)

82 13/16"(2103)
84 5/16"(2142)
80 3/4"(2061)
80"(2032)
72 27/32"(1860)




SWDP6980




SWDP7780

90 13/16"(2307)
92 5/16"(2346)
88 3/4"(2264)
88"(2235)
80 27/32"(2053)

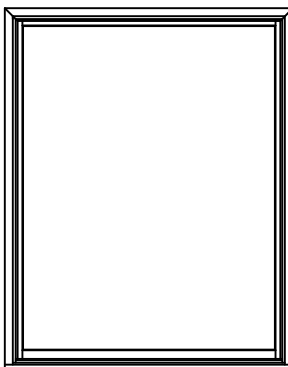


SWDP6988

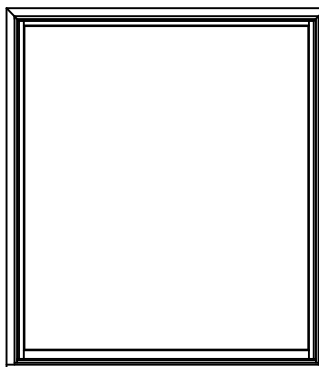


SWDP7788

94 13/16"(2408)
96 5/16"(2446)
92 3/4"(2366)
92"(2337)
84 27/32"(2155)

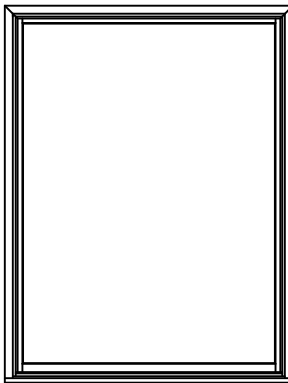

SWDP6992

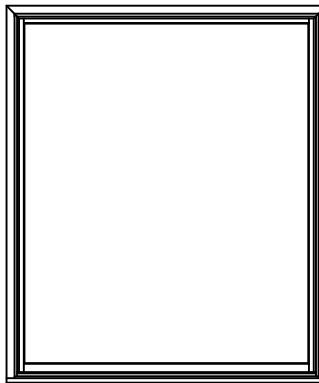

SWDP7792

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE UNITS WITH 16" FLANKERS
ELEVATIONS

MO BRICKMOLD	102 5/8"(2607)	107 5/8"(2734)
MO FLAT CASING	105 5/8"(2683)	110 5/8"(2810)
ROUGH OPENING	96 7/8"(2461)	104 7/8"(2664)
FRAME SIZE	96 1/8"(2442)	104 1/8"(2645)
DAYLIGHT OPENING	14 13/16"(376)[2] 46 13/16"(1189)	14 13/16"(376)[2] 54 13/16"(1392)

54 13/16"(1392)
56 5/16"(1430)
52 3/4"(1340)
52"(1321)
21 1/4"(540)[2]




SWDP6152-16



SWDP6952-16

58 13/16"(1454)
60 5/16"(1532)
56 3/4"(1441)
56"(1422)
23 1/4"(590)[2]




SWDP6156-16




SWDP6956-16

66 13/16"(1697)
68 5/16"(1737)
64 3/4"(1645)
64"(1626)
27 1/4"(689)[2]



SWDP6164-16



SWDP6964-16


ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E I BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE UNITS WITH 20" FLANKERS
ELEVATIONS

MO BRICKMOLD	107 5/8"(2734)	115 5/8"(2937)
MO FLAT CASING	110 5/8"(2810)	118 5/8"(3013)
ROUGH OPENING	104 7/8"(2664)	112 7/8"(2867)
FRAME SIZE	104 1/8"(2645)	112 1/8"(2848)
DAYLIGHT OPENING	18 13/16"(478)[2] 46 13/16"(1189)	18 13/16"(478)[2] 54 13/16"(1392)

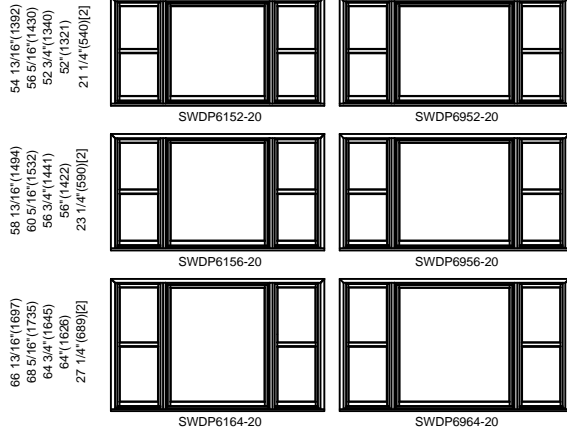

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
 E I BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE RADIUS UNITS
ELEVATIONS

M.O. BRICKMOUND	24 7/8"(632)	28 7/8"(733)	32 7/8"(835)	34 7/8"(886)	36 7/8"(937)	40 7/8"(1038)	44 7/8"(1140)
M.O. ADAMS/FLAT CASING	27 7/8"(708)	31 7/8"(810)	35 7/8"(911)	37 7/8"(962)	39 7/8"(1013)	43 7/8"(1114)	47 7/8"(1216)
ROUGH OPENING	22 1/8"(562)	26 1/8"(664)	30 1/8"(765)	32 1/8"(816)	34 1/8"(867)	38 1/8"(968)	42 1/8"(1070)
FRAME SIZE	21 3/8"(543)	25 3/8"(645)	29 3/8"(747)	31 3/8"(797)	33 3/8"(848)	37 3/8"(949)	41 3/8"(1051)
DAYLIGHT OPENING	14 13/16"(376)	18 13/16"(478)	22 13/16"(579)	24 13/16"(630)	26 13/16"(681)	30 13/16"(783)	34 13/16"(884)

54 13/16"(1392) 56 5/16"(1430) 52 3/4"(1340) 52"(1321) 44 27/32"(1139)							
58 13/16"(1494) 60 5/16"(1532) 56 3/4"(1441) 56"(1422) 48 27/32"(1241)							
62 13/16"(1596) 64 5/16"(1634) 60 3/4"(1543) 60"(1524) 52 27/32"(1342)							
66 13/16"(1697) 68 5/16"(1735) 64 3/4"(1645) 64"(1626) 56 27/32"(1444)							
70 13/16"(1799) 72 5/16"(1837) 68 3/4"(1746) 68"(1727) 60 27/32"(1545)							

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE RADIUS UNITS
ELEVATIONS

M.O. BRICKMOUND 24 7/8"(632)
M.O. ADAMS/FLAT CASING 27 7/8"(708)
ROUGH OPENING 22 1/8"(562)
FRAME SIZE 21 3/8"(543)
DAYLIGHT OPENING 14 13/16"(376)

28 7/8"(733)
31 7/8"(810)
26 1/8"(664)
25 3/8"(645)
18 13/16"(478)

32 7/8"(835)
35 7/8"(911)
30 1/8"(765)
29 3/8"(670)
22 13/16"(579)


34 7/8"(886)
37 7/8"(962)
32 1/8"(816)
31 3/8"(797)
24 13/16"(630)

36 7/8"(937)
39 7/8"(1013)
34 1/8"(867)
33 3/8"(848)
26 13/16"(681)


40 7/8"(1038)
43 7/8"(1114)
38 1/8"(968)
37 3/8"(949)
30 13/16"(783)

44 7/8"(1140)
47 7/8"(1216)
42 1/8"(1070)
41 3/8"(1051)
34 13/16"(884)


74 13/16"(1900)
76 5/16"(1938)
72 3/4"(1848)
72"(1829)
64 27/32"(1647)




SWDHP2172




SWDHP2572




SWDHP2972




SWDHP3172



SWDHP3372




SWDHP3772




SWDHP4172


78 13/16"(2002)
80 5/16"(2040)
76 3/4"(1949)
76"(1930)
68 27/32"(1749)




SWDHP2176




SWDHP2576




SWDHP2976




SWDHP3176



SWDHP3376




SWDHP3776




SWDHP4176


82 3/16"(2088)
83 11/16"(2126)
80 3/4"(2051)
80"(2032)
72 27/32"(1850)




SWDHP2180




SWDHP2580




SWDHP2980




SWDHP3180



SWDHP3380




SWDHP3780




SWDHP4180


90 3/16"(2291)
91 11/16"(2329)
88 3/4"(2254)
88"(2235)
80 27/32"(2053)




SWDHP2188




SWDHP2588




SWDHP2988




SWDHP3188



SWDHP3388



SWDHP3788

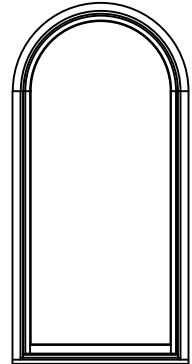

SWDHP4188


ELEVATION SYMBOL LEGEND:
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE RADIUS UNITS ELEVATIONS

M.O. BRICKMOULD	24 7/8"(632)	28 7/8"(733)	32 7/8"(835)	34 7/8"(886)	36 7/8"(937)	40 7/8"(1038)	44 7/8"(1140)
M.O. ADAMS/FLAT CASING	27 7/8"(708)	31 7/8"(810)	35 7/8"(911)	37 7/8"(962)	39 7/8"(1013)	43 7/8"(1114)	47 7/8"(1216)
ROUGH OPENING	22 1/8"(562)	26 1/8"(664)	30 1/8"(765)	32 1/8"(816)	34 1/8"(867)	38 1/8"(968)	42 1/8"(1070)
FRAME SIZE	21 3/8"(543)	25 3/8"(645)	29 3/8"(747)	31 3/8"(797)	33 3/8"(848)	37 3/8"(949)	41 3/8"(1051)
DAYLIGHT OPENING	14 13/16"(376)	18 13/16"(478)	22 13/16"(579)	24 13/16"(630)	26 13/16"(681)	30 13/16"(783)	34 13/16"(884)

94 13/16"(2408)
96 5/16"(2446)
92 3/4"(2356)
92 1/2"(2337)
84 27/32"(2165)

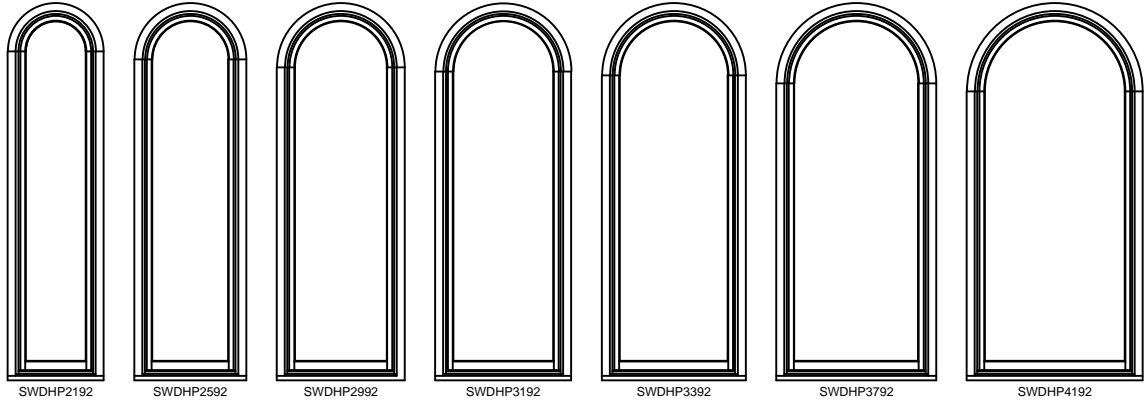

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
 - E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
 - ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE RADIUS UNITS
ELEVATIONS

M.O. BRICKMOUND
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)

52 7/8"(1343)
55 7/8"(1419)
50 1/8"(1273)
49 3/8"(1254)
42 13/16"(1087)


56 7/8"(1445)
59 7/8"(1521)
54 1/8"(1375)
53 3/8"(1356)
46 13/16"(1189)

64 7/8"(1648)
67 7/8"(1724)
62 1/8"(1578)
61 3/8"(1559)
54 13/16"(1392)


54 13/16"(1392)
56 5/16"(1430)
52 3/4"(1340)
52"(1321)
44 27/32"(1139)




SWDHP4552



SWDHP4952




SWDHP5352




SWDHP6152


58 13/16"(1494)
60 5/16"(1532)
56 3/4"(1441)
56"(1422)
48 27/32"(1241)




SWDHP4556



SWDHP4956




SWDHP5356




SWDHP6156


62 13/16"(1595)
64 5/16"(1634)
60 3/4"(1524)
60 3/8"(1504)
52 27/32"(1342)




SWDHP4560



SWDHP4960




SWDHP5360




SWDHP6160


66 13/16"(1697)
68 5/16"(1735)
64 3/4"(1645)
64 3/8"(1625)
56 27/32"(1444)




SWDHP4564



SWDHP4964




SWDHP5364




SWDHP6164


70 13/16"(1799)
72 5/16"(1837)
68 3/4"(1747)
68 3/8"(1727)
60 27/32"(1545)




SWDHP4568



SWDHP4968



SWDHP5368



SWDHP6168

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE RADIUS UNITS
ELEVATIONS

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)

52 7/8"(1343)
55 7/8"(1419)
50 1/8"(1273)
49 3/8"(1254)
42 13/16"(1087)


56 7/8"(1445)
59 7/8"(1521)
54 1/8"(1375)
53 3/8"(1356)
46 13/16"(1189)

64 7/8"(1648)
67 7/8"(1724)
62 1/8"(1578)
61 3/8"(1559)
54 13/16"(1392)


74 13/16"(1900)
76 5/16"(1938)
72 3/4"(1848)
72"(1829)
64 27/32"(1647)




SWDHP4572



SWDHP4972




SWDHP5372




SWDHP6172


78 13/16"(2002)
80 5/16"(2040)
76 3/4"(1949)
76"(1930)
68 27/32"(1749)




SWDHP4576



SWDHP4976




SWDHP5376




SWDHP6176


82 13/16"(2103)
84 5/16"(2142)
80 3/4"(2051)
80"(2032)
72 27/32"(1850)




SWDHP4580



SWDHP4980




SWDHP5380




SWDHP6180


90 13/16"(2307)
92 5/16"(2345)
88 3/4"(2254)
88"(2235)
80 27/32"(2053)

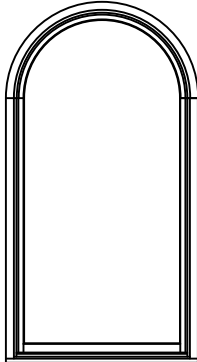


SWDHP4588

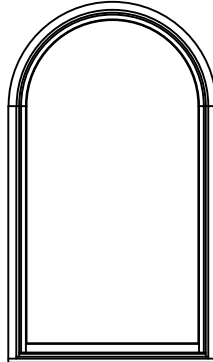

SWDHP4988

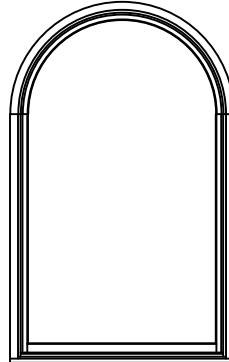

SWDHP5388

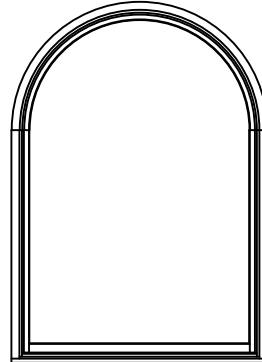

SWDHP6188

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

PICTURE RADIUS UNITS
ELEVATIONS

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)

52 7/8"(1343)
55 7/8"(1419)
50 1/8"(1273)
49 3/8"(1254)
42 13/16"(1087)


56 7/8"(1445)
59 7/8"(1521)
54 1/8"(1375)
53 3/8"(1356)
46 13/16"(1189)

64 7/8"(1648)
67 7/8"(1724)
62 1/8"(1578)
61 3/8"(1559)
54 13/16"(1392)


94 13/16"(2408)
96 5/16"(2446)
92 3/4"(2356)
92"(2337)
84 27/32"(2155)

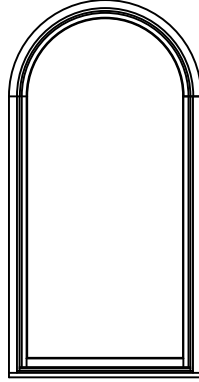


SWDHP4592

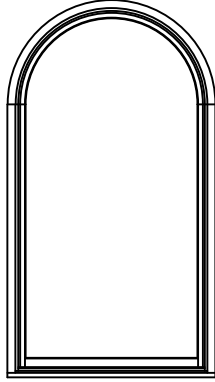

SWDHP4992

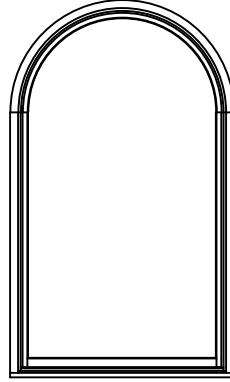

SWDHP5392

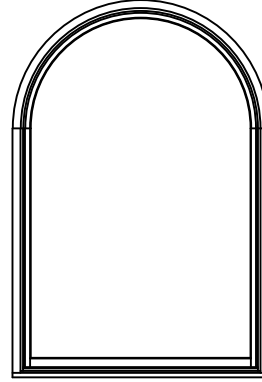

SWDHP6192

ELEVATION SYMBOL LEGEND:

VALUES IN () ARE IN MILLIMETER CONVERSIONS

- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


PICTURE RADIUS UNITS
ELEVATIONS

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


72 7/8"(1851)
75 7/8"(1927)
70 1/8"(1781)
69 3/8"(1762)
62 13/16"(1595)

80 7/8"(2054)
83 7/8"(2130)
78 1/8"(1984)
77 3/8"(1965)
70 13/16"(1799)

54 13/16"(1392)
56 5/16"(1430)
52 3/4"(1340)
52"(1321)
44 27/32"(1139)




SWDHP6952




SWDHP7752

58 13/16"(1494)
60 5/16"(1532)
56 3/4"(1441)
56"(1422)
48 27/32"(1241)




SWDHP6956




SWDHP7756

62 13/16"(1595)
64 5/16"(1634)
60 3/4"(1543)
60"(1524)
52 27/32"(1342)




SWDHP6960




SWDHP7760

66 13/16"(1697)
68 5/16"(1735)
64 3/4"(1645)
64"(1626)
56 27/32"(1444)




SWDHP6964




SWDHP7764

70 13/16"(1799)
72 5/16"(1837)
68 3/4"(1746)
68"(1727)
60 27/32"(1545)



SWDHP6968



SWDHP7768

VALUES IN () ARE IN MILLIMETER CONVERSIONS

E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS

NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


PICTURE RADIUS UNITS
ELEVATIONS

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


72 7/8"(1851)
75 7/8"(1927)
70 1/8"(1781)
69 3/8"(1762)
62 13/16"(1595)

80 7/8"(2054)
83 7/8"(2130)
78 1/8"(1984)
77 3/8"(1965)
70 13/16"(1799)

74 13/16"(1900)
76 5/16"(1938)
72 3/4"(1848)
72"(1829)
64 27/32"(1647)




SWDHP6972




SWDHP7772

78 13/16"(2002)
80 5/16"(2040)
76 3/4"(1949)
76"(1930)
68 27/32"(1749)




SWDHP6976




SWDHP7776

82 13/16"(2103)
84 5/16"(2142)
80 3/4"(2051)
80"(2032)
72 27/32"(1850)




SWDHP6980




SWDHP7780

90 13/16"(2307)
92 5/16"(2345)
88 3/4"(2254)
88"(2235)
80 27/32"(2053)

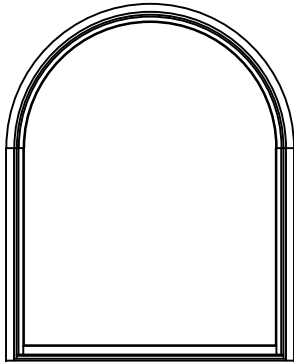

SWDHP6988

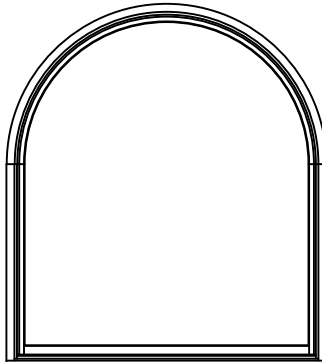

SWDHP7788

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


PICTURE RADIUS UNITS
ELEVATIONS

M.O. BRICKMOUND
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


72 7/8"(1851)
75 7/8"(1927)
70 1/8"(1781)
69 3/8"(1762)
62 13/16"(1595)

80 7/8"(2054)
83 7/8"(2130)
78 1/8"(1984)
77 3/8"(1965)
70 13/16"(1799)

94 13/16"(2408)
96 5/16"(2446)
92 3/4"(2356)
92 (2337)
84 27/32"(2185)

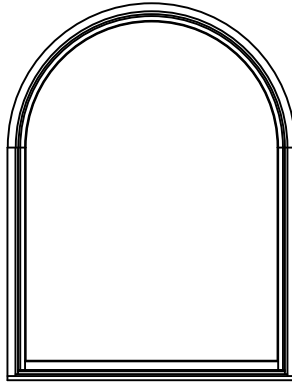

SWDHP6992

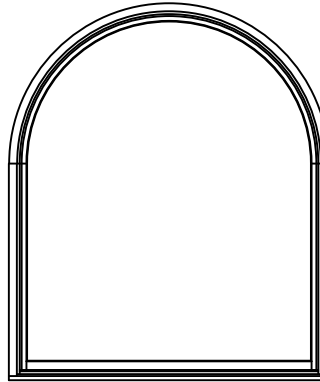

SWDHP7792

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
 ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

TRANSOM ELEVATIONS

	24 7/8"(632)	28 7/8"(733)	32 7/8"(835)	34 7/8"(886)	36 7/8"(937)	40 7/8"(1038)	44 7/8"(1140)
M.O. BRICKMOULD	24 7/8"(632)	28 7/8"(733)	32 7/8"(835)	34 7/8"(886)	36 7/8"(937)	40 7/8"(1038)	44 7/8"(1140)
M.O. ADAMS/FLAT CASING	27 7/8"(708)	31 7/8"(810)	35 7/8"(911)	37 7/8"(962)	39 7/8"(1013)	43 7/8"(1114)	47 7/8"(1216)
ROUGH OPENING	22 1/8"(562)	26 1/8"(664)	30 1/8"(765)	32 1/8"(816)	34 1/8"(867)	38 1/8"(968)	42 1/8"(1070)
FRAME SIZE	21 3/8"(543)	25 3/8"(645)	29 3/8"(747)	31 3/8"(797)	33 3/8"(848)	37 3/8"(949)	41 3/8"(1051)
DAYLIGHT OPENING	14 13/16"(376)	18 13/16"(478)	22 13/16"(579)	24 13/16"(630)	26 13/16"(681)	30 13/16"(783)	34 13/16"(884)
	17 13/16"(452) 19 5/16"(491) 15 3/4"(400) 15"(381) 8 13/32"(214)						
	20 13/16"(529) 22 5/16"(567) 18 3/4"(476) 18"(457) 11 13/32"(290)						
	26 13/16"(681) 28 5/16"(719) 24 3/4"(629) 24"(610) 17 13/32"(456)						

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

TRANSOM ELEVATIONS


M.O. BRICKMOULD 48 7/8"(1241)
M.O. ADAMS/FLAT CASING 51 7/8"(1318)
ROUGH OPENING 46 1/8"(1172)
FRAME SIZE 45 3/8"(1153)
DAYLIGHT OPENING 38 13/16"(986)

52 7/8"(1343)
55 7/8"(1419)
50 1/8"(1273)
49 3/8"(1254)
42 13/16"(1087)


56 7/8"(1445)
59 7/8"(1521)
54 1/8"(1375)
53 3/8"(1356)
46 13/16"(1189)

64 7/8"(1648)
67 7/8"(1724)
62 1/8"(1578)
61 3/8"(1559)
54 13/16"(1392)


17 13/16"(452)
19 5/16"(491)
15 3/4"(400)
15"(381)
8 13/32"(214)




SWDT4552



SWDT4952



SWDT5352



SWDT6152

20 13/16"(529)
22 5/16"(567)
18 3/4"(476)
18"(457)
11 13/32"(290)



SWDT4556



SWDT4956



SWDT5356



SWDT6156

26 13/16"(681)
28 5/16"(719)
24 3/4"(629)
24"(610)
17 13/32"(456)



SWDT4564



SWDT4964



SWDT5364



SWDT6164

ELEVATION SYMBOL LEGEND:


VALUES IN () ARE IN MILLIMETER CONVERSIONS

- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

TRANSOM ELEVATIONS

M.O. BRICKMOULD	72 7/8"(1851)	80 7/8"(2054)
M.O. ADAMS/FLAT CASING	75 7/8"(1927)	83 7/8"(2130)
ROUGH OPENING	70 1/8"(1781)	78 1/8"(1984)
FRAME SIZE	69 3/8"(1762)	77 3/8"(1965)
DAYLIGHT OPENING	62 13/16"(1595)	70 13/16"(1799)

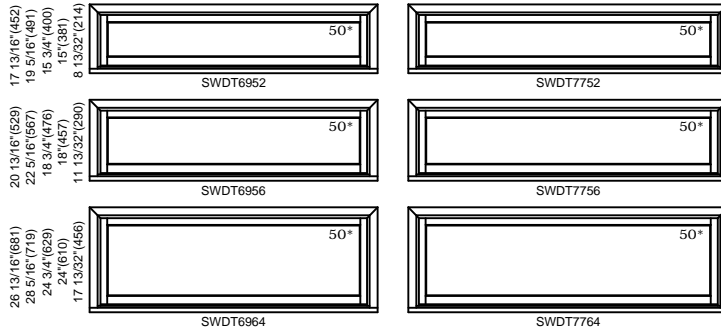

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

SECTOR SINGLE ELEVATIONS

M.O. BRICKMOULD	24 7/8"(632)	28 7/8"(733)	32 7/8"(835)	34 7/8"(886)	36 7/8"(937)	40 7/8"(1038)	44 7/8"(1140)
M.O. ADAMS/FLAT CASING	27 7/8"(708)	31 7/8"(810)	35 7/8"(911)	37 7/8"(962)	39 7/8"(1013)	43 7/8"(1114)	47 7/8"(1216)
ROUGH OPENING	22 1/8"(562)	26 1/8"(664)	30 1/8"(765)	32 1/8"(816)	34 1/8"(867)	38 1/8"(968)	42 1/8"(1070)
FRAME SIZE	21 3/8"(543)	25 3/8"(645)	29 3/8"(747)	31 3/8"(797)	33 3/8"(848)	37 3/8"(949)	41 3/8"(1051)
DAYLIGHT OPENING	14 13/16"(376)	18 13/16"(478)	22 13/16"(579)	24 13/16"(630)	26 13/16"(681)	30 13/16"(783)	34 13/16"(884)

34 13/16"(884) 36 5/16"(922) 32 3/4"(832) 11 1/4"(286) [2]							
38 13/16"(986) 40 5/16"(1024) 36 3/4"(933) 36"(914) 13 1/4"(339) [2]							
42 13/16"(1087) 44 5/16"(1126) 40 3/4"(1035) 40"(1016) 15 1/4"(394) [2]							
46 13/16"(1189) 48 5/16"(1227) 44 3/4"(1137) 44"(1118) 17 1/4"(436) [2]							
50 13/16"(1291) 52 5/16"(1329) 48 3/4"(1239) 48"(1219) 19 1/4"(486) [2]							
54 13/16"(1392) 56 5/16"(1430) 52 3/4"(1340) 52"(1321) 21 1/4"(537) [2]							
58 13/16"(1494) 60 5/16"(1532) 56 3/4"(1441) 56"(1422) 23 1/4"(587) [2]							

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- # NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O. (Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

SECTOR SINGLE ELEVATIONS

M.O. BRICKMOULD 24 7/8"(632)
M.O. ADAMS/FLAT CASING 27 7/8"(708)
ROUGH OPENING 21 1/8"(562)
FRAME SIZE 21 3/8"(543)
DAYLIGHT OPENING 14 13/16"(376)

28 7/8"(733)
31 7/8"(810)
26 1/8"(664)
25 3/8"(645)
18 13/16"(478)

32 7/8"(835)
35 7/8"(911)
30 1/8"(765)
29 3/8"(670)
22 13/16"(579)


34 7/8"(886)
37 7/8"(962)
32 1/8"(816)
31 3/8"(797)
24 13/16"(630)

36 7/8"(937)
39 7/8"(1013)
34 1/8"(867)
33 3/8"(848)
26 13/16"(681)


40 7/8"(1038)
43 7/8"(1114)
38 1/8"(968)
37 3/8"(949)
30 13/16"(783)

44 7/8"(1140)
47 7/8"(1216)
42 1/8"(1070)
41 3/8"(1051)
34 13/16"(884)


62 13/16"(1595)
64 5/16"(1634)
60 3/4"(1543)
60"(1524)
25 1/4"(639)[2]




SWDS2160



SWDS2560




SWDS2960




E1

SWDS3160




E

SWDS3360



E


SWDS3760




E

SWDS4160


66 53/16"(1697)
68 5/16"(1735)
64 3/4"(1645)
64"(1626)
27 1/4"(689)[2]



SWDS2164




SWDS2564




E1

SWDS2964




E1

SWDS3164




E

SWDS3364



E


SWDS3764




E

SWDS4164


70 13/16"(1799)
72 5/16"(1837)
68 3/4"(1746)
68"(1727)
29 1/4"(740)[2]



SWDS2168




SWDS2568




E1

SWDS2968




E

SWDS3168




E

SWDS3368



E


SWDS3768




E

SWDS4168


74 13/16"(1900)
76 5/16"(1938)
72 3/4"(1848)
72"(1829)
31 1/4"(791)[2]



SWDS2172




SWDS2572




E

SWDS2972




E

SWDS3172




E

SWDS3372



E


SWDS3772




E

SWDS4172

78 13/16"(2002)
80 5/16"(2040)
76 3/4"(1949)
76"(1930)
33 1/4"(841)[2]




SWDS2176




E1

SWDS2576




E

SWDS2976




E

SWDS3176




E

SWDS3376



E

SWDS3776



E

SWDS4176

ELEVATION SYMBOL LEGEND:


- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- # NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options


SECTOR SINGLE ELEVATIONS

M.O. BRICKMOULD	24 7/8"(632)	28 7/8"(733)	32 7/8"(835)	34 7/8"(886)	36 7/8"(937)	40 7/8"(1038)	44 7/8"(1140)
M.O. ADAMS/FLAT CASING	27 7/8"(708)	31 7/8"(810)	35 7/8"(911)	37 7/8"(962)	39 7/8"(1013)	43 7/8"(1114)	47 7/8"(1216)
ROUGH OPENING	22 1/8"(562)	26 1/8"(664)	30 1/8"(765)	32 1/8"(816)	34 1/8"(867)	38 1/8"(968)	42 1/8"(1070)
FRAME SIZE	21 3/8"(543)	25 3/8"(645)	29 3/8"(747)	31 3/8"(797)	33 3/8"(848)	37 3/8"(949)	41 3/8"(1051)
DAYLIGHT OPENING	14 13/16"(376)	18 13/16"(478)	22 13/16"(579)	24 13/16"(630)	26 13/16"(681)	30 13/16"(783)	34 13/16"(884)


82 13/16"(2103)
84 5/16"(2143)
80 3/4"(2051)
80 7/8"(2032)
35 1/4"(892)[2]

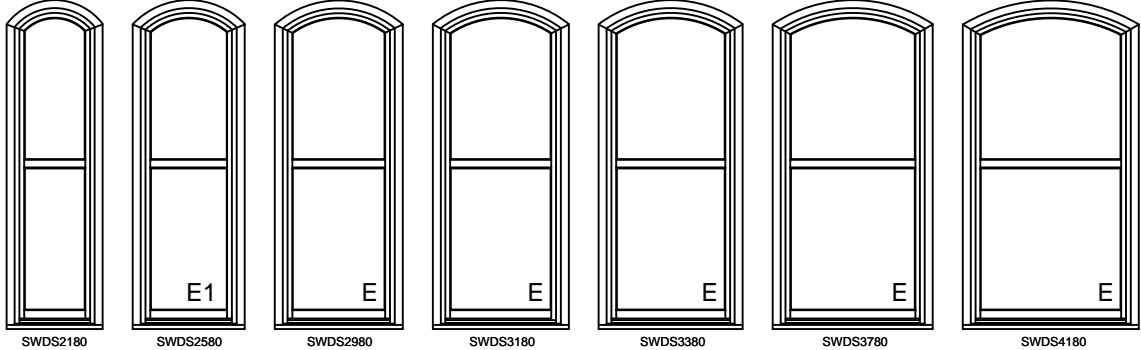

90 13/16"(2307)
90 5/8"(2345)
88 3/4"(2254)
88 7/8"(2235)
39 1/4"(994)[2]

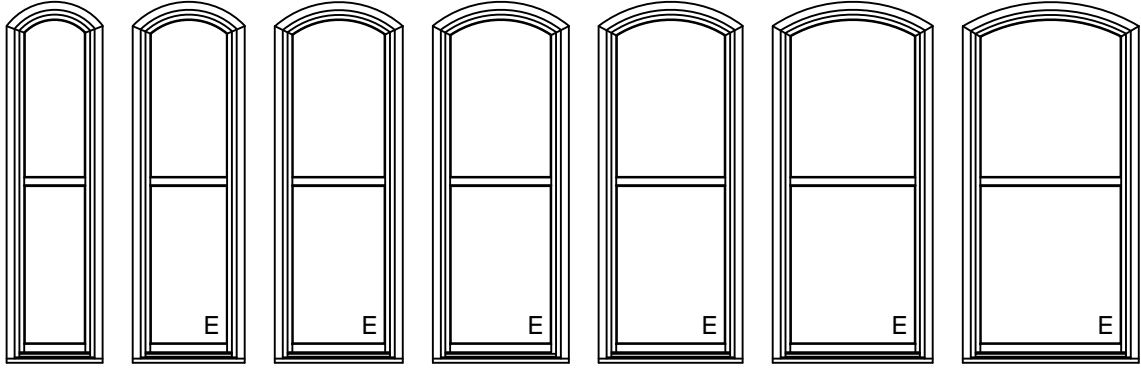

94 13/16"(2408)
96 5/16"(2448)
92 3/4"(2356)
92 7/8"(2337)
41 1/4"(1046)[2]

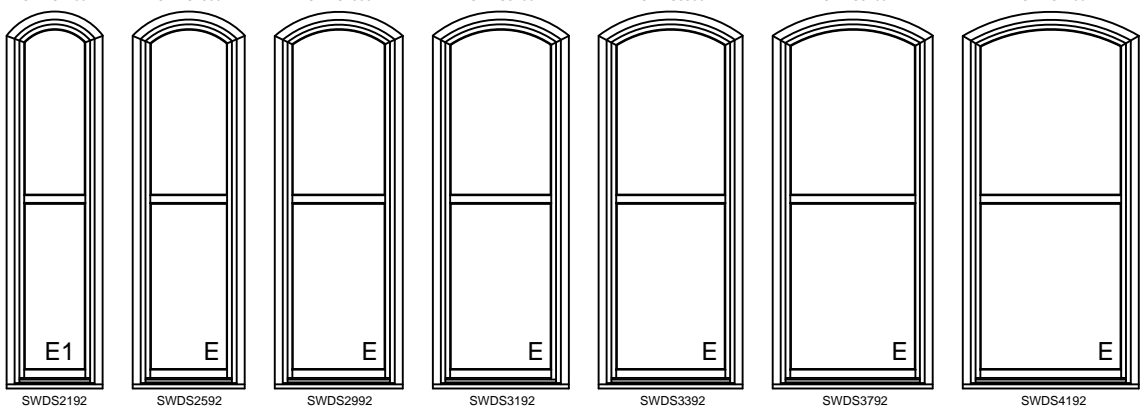

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING


Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

SECTOR SINGLE ELEVATIONS


M.O. BRICKMOULD 48 7/8" (1241)
 M.O. ADAMS/FLAT CASING 51 7/8" (1318)
 ROUGH OPENING 46 1/8" (1172)
 FRAME SIZE 45 3/8" (1153)
 DAYLIGHT OPENING 38 13/16" (986)




SWDS4532




SWDS4536




SWDS4540




SWDS4544



SWDS4548




SWDS4552



SWDS4556


M.O. BRICKMOULD 48 7/8" (1241)
 M.O. ADAMS/FLAT CASING 51 7/8" (1318)
 ROUGH OPENING 46 1/8" (1172)
 FRAME SIZE 45 3/8" (1153)
 DAYLIGHT OPENING 38 13/16" (986)

62 13/16" (1595)
 64 5/16" (1634)
 60 3/4" (1543)
 60 1/8" (1524)
 25 1/4" (636)[2]




SWDS4560

66 13/16" (1697)
 68 5/16" (1735)
 64 3/4" (1645)
 64 1/8" (1626)
 27 1/4" (699)[2]




SWDS4564

70 13/16" (1799)
 72 5/16" (1837)
 68 3/4" (1746)
 68 1/8" (1727)
 29 1/4" (740)[2]




SWDS4568

74 13/16" (1900)
 76 5/16" (1938)
 72 3/4" (1846)
 72 1/8" (1829)
 31 1/4" (791)[2]



SWDS4572


78 13/16" (2002)
 80 5/16" (2040)
 76 3/4" (1949)
 76 1/8" (1930)
 33 1/4" (841)[2]



SWDS4576


M.O. BRICKMOULD 48 7/8" (1241)
 M.O. ADAMS/FLAT CASING 51 7/8" (1318)
 ROUGH OPENING 46 1/8" (1172)
 FRAME SIZE 45 3/8" (1153)
 DAYLIGHT OPENING 38 13/16" (986)

82 13/16" (2103)
 84 5/16" (2142)
 80 3/4" (2051)
 80 1/8" (2032)
 35 1/4" (892)[2]




SWDS4580

90 13/16" (2307)
 92 5/16" (2346)
 88 3/4" (2254)
 88 1/8" (2235)
 39 1/4" (994)[2]

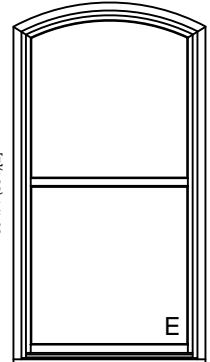

SWDS4588

94 13/16" (2408)
 96 5/16" (2446)
 92 3/4" (2356)
 92 1/8" (2337)
 41 1/4" (1045)[2]

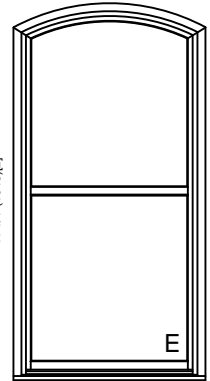

SWDS4592

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizing. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

2 WIDE SECTOR UNITS
ELEVATIONS

MO BRICKMOLD	46 1/4"(1175)	54 1/4"(1378)	62 1/4"(1581)	66 1/4"(1683)	70 1/4"(1784)	78 1/4"(1988)	86 1/4"(2191)
MO FLAT CASING	49 1/4"(1251)	57 1/4"(1454)	65 1/4"(1657)	69 1/4"(1759)	73 1/4"(1861)	81 1/4"(2064)	89 1/4"(2267)
ROUGH OPENING	43 1/2"(1105)	51 1/2"(1308)	59 1/2"(1511)	63 1/2"(1613)	67 1/2"(1715)	75 1/2"(1918)	83 1/2"(2121)
FRAME SIZE	42 3/4"(1086)	50 3/4"(1289)	58 3/4"(1492)	62 3/4"(1594)	66 3/4"(1695)	74 3/4"(1899)	82 3/4"(2102)
DAYLIGHT OPENING	14 13/16"(376)[2]	18 13/16"(478)[2]	22 13/16"(579)[2]	24 13/16"(630)[2]	26 13/16"(681)[2]	30 13/16"(783)[2]	34 13/16"(884)[2]

34 13/16"(884)							
36 5/16"(922)							
38 13/16"(986)							
40 5/16"(1024)							
42 13/16"(1087)							
44 5/16"(1126)							
46 13/16"(1189)							
48 5/16"(1227)							
49 1/4"(1251)							
50 13/16"(1291)							
52 5/16"(1329)							
54 13/16"(1392)							
56 5/16"(1430)							
58 13/16"(1494)							
60 5/16"(1532)							
62 13/16"(1595)							
64 5/16"(1634)							
66 13/16"(1697)							
68 5/16"(1735)							
70 13/16"(1799)							

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

2 WIDE SECTOR UNITS
ELEVATIONS

MO BRICKMOLD	46 1/4"(1175)	54 1/4"(1378)	62 1/4"(1581)	66 1/4"(1683)	70 1/4"(1784)	78 1/4"(1988)	86 1/4"(2191)
MO FLAT CASING	49 1/4"(1251)	57 1/4"(1454)	65 1/4"(1657)	69 1/4"(1759)	73 1/4"(1861)	81 1/4"(2064)	89 1/4"(2267)
ROUGH OPENING	43 1/2"(1105)	51 1/2"(1308)	59 1/2"(1511)	63 1/2"(1613)	67 1/2"(1715)	75 1/2"(1918)	83 1/2"(2121)
FRAME SIZE	42 3/4"(1086)	50 3/4"(1289)	58 3/4"(1492)	62 3/4"(1594)	66 3/4"(1695)	74 3/4"(1899)	82 3/4"(2102)
DAYLIGHT OPENING	14 13/16"(376)[2]	18 13/16"(478)[2]	22 13/16"(579)[2]	24 13/16"(630)[2]	26 13/16"(681)[2]	30 13/16"(783)[2]	34 13/16"(884)[2]

74 13/16"(1900) 76 5/16"(1938) 72 3/4"(1848) 72"(1829) 31 1/4"(794)[2]							
	SWDS2172-2	SWDS2572-2	SWDS2972-2	SWDS3172-2	SWDS3372-2	SWDS3772-2	SWDS4172-2
78 13/16"(2002) 80 5/16"(2040) 76 3/4"(1949) 76"(1930) 33 1/4"(841)[2]							
	SWDS2176-2	SWDS2576-2	SWDS2976-2	SWDS3176-2	SWDS3376-2	SWDS3776-2	SWDS4176-2
82 13/16"(2103) 84 5/16"(2142) 80 3/4"(2051) 80"(2032) 35 1/4"(895)[2]							
	SWDS2180-2	SWDS2580-2	SWDS2980-2	SWDS3180-2	SWDS3380-2	SWDS3780-2	SWDS4180-2
90 13/16"(2307) 92 5/16"(2345) 88 3/4"(2254) 88"(2235) 39 1/4"(997)[2]							
	SWDS2188-2	SWDS2588-2	SWDS2988-2	SWDS3188-2	SWDS3388-2	SWDS3788-2	SWDS4188-2
94 13/16"(2408) 96 5/16"(2446) 92 3/4"(2356) 92"(2337) 41 1/4"(1048)[2]							
	SWDS2192-2	SWDS2592-2	SWDS2992-2	SWDS3192-2	SWDS3392-2	SWDS3792-2	SWDS4192-2











ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
 E 1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

2 WIDE SECTOR UNITS
ELEVATIONS

MO BRICKMOLD 94 1/4"(2394)
MO FLAT CASING 97 1/4"(2470)
ROUGH OPENING 91 1/2"(2324)
FRAME SIZE 90 3/4"(2305)
DAYLIGHT OPENING 38 13/16"(986)[2]

MO BRICKMOLD 94 1/4"(2394)
MO FLAT CASING 97 1/4"(2470)
ROUGH OPENING 91 1/2"(2324)
FRAME SIZE 90 3/4"(2305)
DAYLIGHT OPENING 38 13/16"(986)[2]



ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E 1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

3 WIDE SECTOR UNITS
ELEVATIONS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

67 5/8"(1718)
70 5/8"(1794)
64 7/8"(1648)
64 1/8"(1629)
14 13/16"(376)[3]

79 5/8"(2022)
82 5/8"(2099)
76 7/8"(1953)
76 1/8"(1934)
18 13/16"(478)[3]

91 5/8"(2327)
94 5/8"(2403)
88 7/8"(2257)
88 1/8"(1492)
22 13/16"(579)[3]

97 5/8"(2481)
100 5/8"(2556)
94 7/8"(2410)
94 1/8"(1594)
24 13/16"(630)[3]

103 5/8"(2632)
106 5/8"(2708)
100 7/8"(2562)
100 1/8"(2543)
26 13/16"(681)[3]

115 5/8"(2937)
118 5/8"(3013)
112 7/8"(2867)
112 1/8"(1899)
30 13/16"(783)[3]

34 13/16"(884)						
36 5/16"(922)						
38 13/16"(986)						
40 5/16"(1024)						
42 13/16"(1087)						
44 5/16"(1126)						
46 13/16"(1189)						
48 5/16"(1229)						
50 13/16"(1291)						
52 5/16"(1329)						
54 13/16"(1392)						
56 5/16"(1430)						
58 13/16"(1494)						
60 5/16"(1532)						
62 13/16"(1595)						
64 5/16"(1634)						
66 13/16"(1697)						
68 5/16"(1735)						
70 13/16"(1799)						

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

3 WIDE SECTOR UNITS
ELEVATIONS

MO BRICKMOLD	67 5/8"(1718)	79 5/8"(2022)	91 5/8"(2327)	97 5/8"(2481)	103 5/8"(2632)	115 5/8"(2937)
MO FLAT CASING	70 5/8"(1794)	82 5/8"(2099)	94 5/8"(2403)	100 5/8"(2556)	106 5/8"(2708)	118 5/8"(3013)
ROUGH OPENING	64 7/8"(1648)	76 7/8"(1953)	88 7/8"(2257)	94 7/8"(2410)	100 7/8"(2562)	112 7/8"(2867)
FRAME SIZE	64 1/8"(1629)	76 1/8"(1934)	88 1/8"(2239)	94 1/8"(2392)	100 1/8"(2544)	112 1/8"(2849)
DAYLIGHT OPENING	14 13/16"(376)[3]	18 13/16"(478)[3]	22 13/16"(579)[3]	24 13/16"(630)[3]	26 13/16"(681)[3]	30 13/16"(783)[3]

74 13/16"(1900) 76 5/16"(1938) 72 3/4"(1848) 72"(1829) 31 1/4"(794)[2]						
78 13/16"(2002) 80 5/16"(2040) 76 3/4"(1949) 76"(1930) 33 1/4"(841)[2]						
82 13/16"(2103) 84 5/16"(2142) 80 3/4"(2051) 80"(2032) 35 1/4"(895)[2]						
90 13/16"(2307) 92 5/16"(2345) 88 3/4"(2254) 88"(2235) 39 1/4"(997)[2]						
94 13/16"(2408) 96 5/16"(2446) 92 3/4"(2356) 92"(2337) 41 1/4"(1048)[2]						

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
 E I BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O. (Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

3 WIDE SECTOR UNITS
ELEVATIONS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

127 5/8"(3242)
130 5/8"(3318)
124 7/8"(3172)
124 1/8"(3153)
34 13/16"(884)[3]

139 5/8"(3546)
142 5/8"(3623)
136 7/8"(3477)
136 1/8"(3458)
38 13/16"(986)[3]

34 13/16"(884)	34 13/16"(884)		
36 5/16"(922)	36 5/16"(922)		
38 13/16"(986)	38 13/16"(986)		
40 5/16"(1024)	40 5/16"(1024)		
42 13/16"(1087)	42 13/16"(1087)		
44 5/16"(1125)	44 5/16"(1125)		
46 13/16"(1189)	46 13/16"(1189)		
48 5/16"(1227)	48 5/16"(1227)		
50 13/16"(1291)	50 13/16"(1291)		
52 5/16"(1329)	52 5/16"(1329)		
54 13/16"(1392)	54 13/16"(1392)		
56 5/16"(1430)	56 5/16"(1430)		
58 13/16"(1494)	58 13/16"(1494)		
60 5/16"(1532)	60 5/16"(1532)		
62 13/16"(1596)	62 13/16"(1596)		
64 5/16"(1634)	64 5/16"(1634)		
66 13/16"(1697)	66 13/16"(1697)		
68 5/16"(1735)	68 5/16"(1735)		
70 13/16"(1799)	70 13/16"(1799)		

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E 1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


3 WIDE SECTOR UNITS
ELEVATIONS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


127 5/8"(3242)
130 5/8"(3318)
124 7/8"(3172)
124 1/8"(3153)
34 13/16"(884)[3]

139 5/8"(3546)
142 5/8"(3623)
136 7/8"(3477)
136 1/8"(3458)
38 13/16"(986)[3]

74 13/16"(1900)
76 5/16"(1938)
72 3/4"(1848)
72"(1829)
31 1/4"(794)[2]




SWDS4172-3




SWDS4572-3

78 13/16"(2002)
80 5/16"(2040)
76 3/4"(1948)
76"(1920)
33 1/4"(841)[2]




SWDS4176-3




SWDS4576-3

82 13/16"(2103)
84 5/16"(2142)
80 3/4"(2051)
80"(2032)
35 1/4"(895)[2]




SWDS4180-3




SWDS4580-3

90 13/16"(2307)
92 5/16"(2345)
88 3/4"(2254)
88"(2235)
38 1/4"(997)[2]




SWDS4188-3



SWDS4588-3

94 13/16"(2408)
96 5/16"(2446)
92 3/4"(2356)
92"(2337)
41 1/4"(1048)[2]



SWDS4192-3



SWDS4592-3

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E I BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

SINGLE RADIUS UNITS

ELEVATIONS

M.O. BRICKMOUND 24 7/8"(632)
 M.O. ADAMS/FLAT CASING 27 7/8"(708)
 ROUGH OPENING 22 1/8"(562)
 FRAME SIZE 21 3/8"(543)
 DAYLIGHT OPENING 14 13/16"(376)

28 7/8"(733)
 31 7/8"(810)
 26 1/8"(664)
 25 3/8"(645)
 18 13/16"(478)




































32 7/8"(835)
 35 7/8"(911)
 30 1/8"(765)
 29 3/8"(670)
 22 13/16"(579)

34 7/8"(886)
 37 7/8"(962)
 32 1/8"(816)
 31 3/8"(797)
 24 13/16"(630)

36 7/8"(937)
 39 7/8"(1013)
 34 1/8"(867)
 31 3/8"(797)
 26 13/16"(681)

40 7/8"(1038)
 43 7/8"(1114)
 38 1/8"(968)
 37 3/8"(949)
 30 13/16"(783)

44 7/8"(1140)
 47 7/8"(1216)
 42 1/8"(1070)
 41 3/8"(1051)
 34 13/16"(884)



ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

SINGLE RADIUS UNITS

ELEVATIONS

M.O. BRICKMOULD 24 7/8"(632)
 M.O. ADAMS/FLAT CASING 27 7/8"(708)
 ROUGH OPENING 22 1/8"(562)
 FRAME SIZE 21 3/8"(543)
 DAYLIGHT OPENING 14 13/16"(376)

28 7/8"(733)
 31 7/8"(810)
 26 1/8"(664)
 25 3/8"(645)
 18 13/16"(478)

32 7/8"(835)
 35 7/8"(911)
 30 1/8"(765)
 29 3/8"(670)
 22 13/16"(579)


34 7/8"(886)
 37 7/8"(962)
 32 1/8"(816)
 31 3/8"(797)
 24 13/16"(630)

36 7/8"(937)
 39 7/8"(1013)
 34 1/8"(867)
 33 3/8"(848)
 26 13/16"(681)


40 7/8"(1038)
 43 7/8"(1114)
 38 1/8"(968)
 37 3/8"(949)
 30 13/16"(783)

44 7/8"(1140)
 47 7/8"(1216)
 42 1/8"(1070)
 41 3/8"(1051)
 34 13/16"(884)


74 13/16"(1900)
 76 5/16"(1938)
 72 3/4"(1848)
 72"(1829)
 31 1/4"(791)[2]




SWDH2172




SWDH2572




SWDH2972




SWDH3172



SWDH3372




SWDH3772




SWDH4172


78 13/16"(2002)
 80 5/16"(2040)
 76 3/4"(1948)
 76"(1930)
 33 1/4"(841)[2]




SWDH2176




SWDH2576




SWDH2976




SWDH3176



SWDH3376




SWDH3776




SWDH4176


82 13/16"(2103)
 84 5/16"(2142)
 80 3/4"(2051)
 80"(2032)
 35 1/4"(892)[2]




SWDH2180




SWDH2580




SWDH2980




SWDH3180



SWDH3380




SWDH3780




SWDH4180


90 13/16"(2307)
 92 5/16"(2345)
 88 3/4"(2254)
 88"(2235)
 39 1/4"(994)[2]




SWDH2188




SWDH2588




SWDH2988




SWDH3188



SWDH3388



SWDH3788

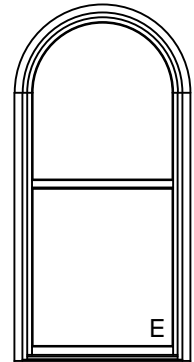

SWDH4188

ELEVATION SYMBOL LEGEND:

VALUES IN () ARE IN MILLIMETER CONVERSIONS

E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS


NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

SINGLE RADIUS UNITS
ELEVATIONS

M.O. BRICKMOULD	24 7/8"(632)	28 7/8"(733)	32 7/8"(835)	34 7/8"(886)	36 7/8"(937)	40 7/8"(1038)	44 7/8"(1140)
M.O. ADAMS/FLAT CASING	27 7/8"(708)	31 7/8"(810)	35 7/8"(911)	37 7/8"(962)	39 7/8"(1013)	43 7/8"(1114)	47 7/8"(1216)
ROUGH OPENING	22 1/8"(562)	26 1/8"(664)	30 1/8"(765)	32 1/8"(816)	34 1/8"(867)	38 1/8"(968)	42 1/8"(1070)
FRAME SIZE	21 3/8"(543)	25 3/8"(645)	29 3/8"(747)	31 3/8"(797)	33 3/8"(848)	37 3/8"(949)	41 3/8"(1051)
DAYLIGHT OPENING	14 13/16"(376)	18 13/16"(478)	22 13/16"(579)	24 13/16"(630)	26 13/16"(681)	30 13/16"(783)	34 13/16"(884)

94 13/16"(2408)
96 5/16"(2446)
92 3/4"(2356)
92"(2337)
41 1/4"(1045) [2]

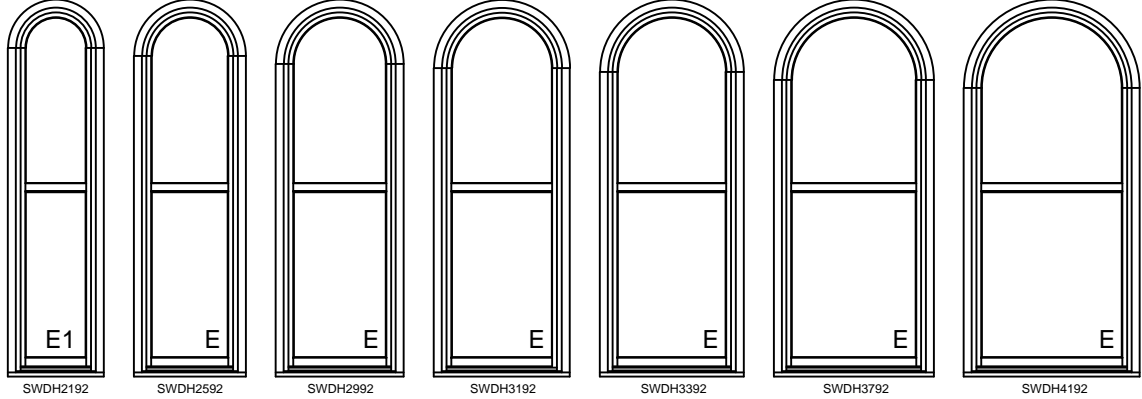

ELEVATION SYMBOL LEGEND:


- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
 - E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
 - ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


SINGLE RADIUS UNITS

ELEVATIONS


M.O. BRICKMOULD 48 7/8"(1241)
M.O. ADAMS/FLAT CASING 51 7/8"(1318)
ROUGH OPENING 46 1/8"(1172)
FRAME SIZE 45 3/8"(1153)
DAYLIGHT OPENING 38 13/16"(986)




SWDH4552




SWDH4556



SWDH4560




SWDH4564




SWDH4568


M.O. BRICKMOULD 48 7/8"(1241)
M.O. ADAMS/FLAT CASING 51 7/8"(1318)
ROUGH OPENING 46 1/8"(1172)
FRAME SIZE 45 3/8"(1153)
DAYLIGHT OPENING 38 13/16"(986)




SWDH4572



SWDH4576




SWDH4580

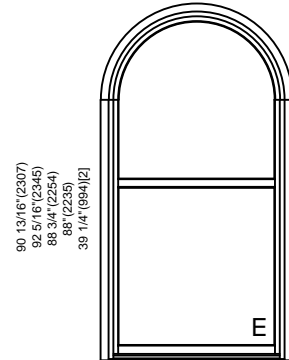

SWDH4588

M.O. BRICKMOULD 48 7/8"(1241)
M.O. ADAMS/FLAT CASING 51 7/8"(1318)
ROUGH OPENING 46 1/8"(1172)
FRAME SIZE 45 3/8"(1153)
DAYLIGHT OPENING 38 13/16"(986)

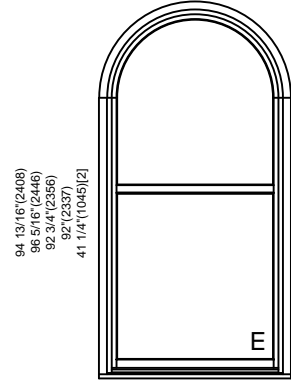

SWDH4592

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.