



TABLE OF CONTENTS

Elevations

Single Units	2
2 Wide Units	6
3 Wide Units	9
Picture Units	13
Picture Units with 16" Flankers	22
Picture Units with 20" Flankers	23
Picture Radius Units	24
Transom Units	33
Sector Top Units	36
2 Wide Sector Top Units	40
3 Wide Sector Top Units	43
Single Radius Units	47

Note:

Elevations shown DO NOT have exterior trim.

Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes.

Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications.

For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.



SINGLE UNITS

	M.O. BRICKMOLD 24 7/8"(632)	28 7/8"(733)	32 7/8"(835)	34 7/8"(886)	36 7/8"(937)	40 7/8"(1038)	44 7/8"(1140)
M.O. ADAMS/FLAT CASING	27 7/8"(708)	31 7/8"(810)	35 7/8"(911)	37 7/8"(962)	39 7/8"(1013)	43 7/8"(1114)	47 7/8"(1216)
ROUGH OPENING	22 1/8"(562)	26 1/8"(664)	30 1/8"(765)	32 1/8"(816)	34 1/8"(867)	38 1/8"(968)	42 1/8"(1070)
FRAME SIZE	21 3/8"(543)	25 3/8"(645)	29 3/8"(746)	31 3/8"(797)	33 3/8"(848)	37 3/8"(949)	41 3/8"(1051)
DAYLIGHT OPENING	14 13/16"(376)	18 13/16"(478)	22 13/16"(579)	24 13/16"(630)	26 13/16"(681)	30 13/16"(783)	34 13/16"(884)
34 13/16"(884) 36 5/16"(922) 32 3/4"(832) 32 7/8"(833) 11 1/4"(286) 2]							
38 13/16"(986) 40 5/16"(1024) 36 3/4"(933) 36 19/14) 13 1/4"(333) 2]							
42 13/16"(1087) 44 5/16"(1126) 40 3/4"(1035) 40 10/16) 15 1/4"(384) 2]							
46 13/16"(1189) 48 5/16"(1227) 44 3/4"(1137) 44 11/18) 17 1/4"(435) 2]							
50 13/16"(1291) 52 5/16"(1329) 48 3/4"(1238) 48 12/19) 19 1/4"(486) 2]							
54 13/16"(1392) 56 5/16"(1430) 52 3/4"(1340) 52 13/21) 21 1/4"(537) 2]							
58 13/16"(1494) 60 5/16"(1532) 56 3/4"(1441) 56 14/22) 23 1/4"(587) 2]							

ELEVATION SYMBOL LEGEND:
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING



SINGLE UNITS

	24 7/8"(632)	28 7/8"(733)	32 7/8"(835)	34 7/8"(886)	36 7/8"(937)	40 7/8"(1038)	44 7/8"(1140)
M.O. BRICKMOUND	27 7/8"(708)	31 7/8"(810)	35 7/8"(911)	37 7/8"(962)	39 7/8"(1013)	43 7/8"(1114)	47 7/8"(1216)
M.O. ADAMS/FLAT CASING	22 1/8"(562)	26 1/8"(664)	30 1/8"(765)	32 1/8"(816)	34 1/8"(867)	38 1/8"(968)	42 1/8"(1070)
ROUGH OPENING	21 3/8"(543)	25 3/8"(645)	29 3/8"(746)	31 3/8"(797)	33 3/8"(848)	37 3/8"(949)	41 3/8"(1051)
FRAME SIZE	14 13/16"(376)	18 13/16"(478)	22 13/16"(579)	24 13/16"(630)	26 13/16"(681)	30 13/16"(783)	34 13/16"(884)
DAYLIGHT OPENING							
62 13/16"(1585)							
64 5/16"(1634)							
60 3/4"(1545)							
60 1/4"(1523)							
25 1/4"(638)[2]							
66 13/16"(1687)							
68 5/16"(1735)							
64 3/4"(1646)							
64 1/4"(1623)							
27 1/4"(689)[2]							
70 13/16"(1799)							
72 5/16"(1837)							
68 3/4"(1746)							
68 1/2"(1727)							
29 1/4"(740)[2]							
74 13/16"(1900)							
76 5/16"(1938)							
72 3/4"(1846)							
72 1/2"(1823)							
31 1/4"(791)[2]							

ELEVATION SYMBOL LEGEND: E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
 VALUES IN () ARE IN MILLIMETER CONVERSIONS E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
 ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING



SINGLE UNITS

M.O. BRICKMOUND
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

24 7/8"(632)
27 7/8"(708)
22 1/8"(562)
21 3/8"(543)
14 13/16"(376)

28 7/8"(733)
31 7/8"(810)
26 1/8"(664)
25 3/8"(645)
18 13/16"(478)








32 7/8"(835)
35 7/8"(911)
30 1/8"(765)
29 3/8"(670)
22 13/16"(579)

34 7/8"(886)
37 7/8"(962)
32 1/8"(816)
31 3/8"(797)
24 13/16"(630)








36 7/8"(937)
39 7/8"(1013)
34 1/8"(867)
33 3/8"(848)
26 13/16"(681)

40 7/8"(1038)
43 7/8"(1114)
38 1/8"(968)
37 3/8"(949)
30 13/16"(783)








78 13/16"(2002)
80 5/16"(2040)
76 3/4"(1948)
76"(1930)
33 1/4"(841)[2]










82 13/16"(2103)
84 5/16"(2142)
80 3/4"(2051)
80"(2032)
35 1/4"(892)[2]



90 13/16"(2307)
92 5/16"(2345)
88 3/4"(2254)
88"(2235)
39 1/4"(994)[2]

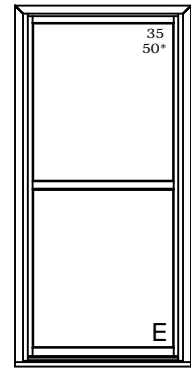

94 13/16"(2408)
96 5/16"(2446)
92 3/4"(2356)
92"(2337)
41 1/4"(1045)[2]

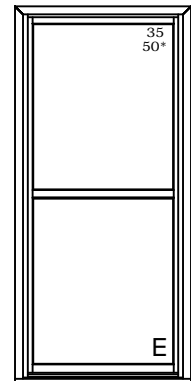

ELEVATION SYMBOL LEGEND: E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
VALUES IN () ARE IN MILLIMETER CONVERSIONS E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING




SINGLE UNITS

M.O. BRICKMOUND
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)

34 13/16"(884)
36 5/16"(922)
32 3/4"(832)
32"(813)
11 1/4"(286)[2]




SWD4532

38 13/16"(986)
40 5/16"(1024)
36 3/4"(933)
36"(914)
13 1/4"(333)[2]




SWD4536

42 13/16"(1087)
44 5/16"(1126)
40 3/4"(1035)
40"(1016)
15 1/4"(384)[2]




SWD4540

46 13/16"(1189)
48 5/16"(1227)
44 3/4"(1137)
44"(1118)
17 1/4"(435)[2]




SWD4544

50 13/16"(1291)
52 5/16"(1329)
48 3/4"(1238)
48"(1219)
19 1/4"(486)[2]




SWD4548

54 13/16"(1392)
56 5/16"(1430)
52 3/4"(1340)
52"(1321)
21 1/4"(537)[2]



SWD4552

58 13/16"(1494)
60 5/16"(1532)
56 3/4"(1441)
56"(1422)
23 1/4"(587)[2]




SWD4556

M.O. BRICKMOUND
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)

62 13/16"(1595)
64 5/16"(1634)
60 3/4"(1543)
60"(1524)
25 1/4"(639)[2]




SWD4560

66 13/16"(1697)
68 5/16"(1735)
64 3/4"(1645)
64"(1626)
27 1/4"(689)[2]




SWD4564

70 13/16"(1799)
72 5/16"(1837)
68 3/4"(1746)
68"(1727)
29 1/4"(740)[2]



SWD4568

74 13/16"(1900)
76 5/16"(1938)
72 3/4"(1848)
72"(1829)
31 1/4"(791)[2]




SWD4572

M.O. BRICKMOUND
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)

78 13/16"(2002)
80 5/16"(2040)
76 3/4"(1949)
76"(1930)
33 1/4"(841)[2]




SWD4576

82 13/16"(2103)
84 5/16"(2142)
80 3/4"(2051)
80"(2032)
35 1/4"(892)[2]




SWD4580

90 13/16"(2307)
92 5/16"(2345)
88 3/4"(2254)
88"(2235)
39 1/4"(994)[2]

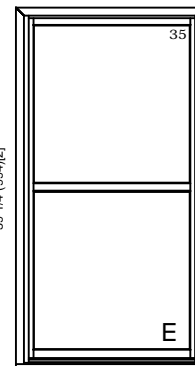

SWD4588

94 13/16"(2408)
96 5/16"(2446)
92 3/4"(2356)
92"(2337)
41 1/4"(1045)[2]

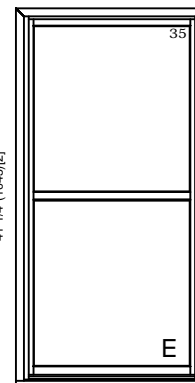

SWD4592

ELEVATION SYMBOL LEGEND:
VALUES IN () ARE IN MILLIMETER CONVERSIONS

E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING



2 WIDE UNITS

	MO BRICKMOLD	MO FLAT CASING	ROUGH OPENING	FRAME SIZE	DAYLIGHT OPENING	46 1/4"(1175)	54 1/4"(1378)	62 1/4"(1581)	66 1/4"(1683)	70 1/4"(1784)	78 1/4"(1988)	86 1/4"(2191)
						49 1/4"(1251)	57 1/4"(1454)	65 1/4"(1657)	69 1/4"(1759)	73 1/4"(1861)	81 1/4"(2064)	89 1/4"(2267)
						43 1/2"(1105)	51 1/2"(1308)	59 1/2"(1511)	63 1/2"(1613)	67 1/2"(1715)	75 1/2"(1918)	83 1/2"(2121)
						42 3/4"(1086)	50 3/4"(1289)	58 3/4"(1492)	62 3/4"(1594)	66 3/4"(1695)	74 3/4"(1898)	82 3/4"(2102)
						14 13/16"(376)[2]	18 13/16"(478)[2]	22 13/16"(579)[2]	24 13/16"(630)[2]	26 13/16"(681)[2]	30 13/16"(783)[2]	34 13/16"(884)[2]
34 13/16"(884)												
36 5/16"(922)	SWD2132-2	SWD2532-2	SWD2932-2	SWD3132-2	SWD3332-2	SWD3732-2	SWD4132-2					
38 13/16"(986)												
40 5/16"(1024)	SWD2136-2	SWD2536-2	SWD2936-2	SWD3136-2	SWD3336-2	SWD3736-2	SWD4136-2					
42 13/16"(1087)												
44 5/16"(1126)	SWD2140-2	SWD2540-2	SWD2940-2	SWD3140-2	SWD3340-2	SWD3740-2	SWD4140-2					
46 13/16"(1189)												
48 5/16"(1227)	SWD2144-2	SWD2544-2	SWD2944-2	SWD3144-2	SWD3344-2	SWD3744-2	SWD4144-2					
50 13/16"(1291)												
52 5/16"(1329)	SWD2148-2	SWD2548-2	SWD2948-2	SWD3148-2	SWD3348-2	SWD3748-2	SWD4148-2					E1
54 13/16"(1392)												
56 5/16"(1430)	SWD2152-2	SWD2552-2	SWD2952-2	SWD3152-2	SWD3352-2	SWD3752-2	SWD4152-2					E
58 13/16"(1494)												
60 5/16"(1532)	SWD2156-2	SWD2556-2	SWD2956-2	SWD3156-2	SWD3356-2	SWD3756-2	SWD4156-2		E1	E1		E
62 13/16"(1595)												
64 5/16"(1634)	SWD2160-2	SWD2560-2	SWD2960-2	SWD3160-2	SWD3360-2	SWD3760-2	SWD4160-2		E1	E		E
66 13/16"(1697)												
68 5/16"(1735)	SWD2164-2	SWD2564-2	SWD2964-2	SWD3164-2	SWD3364-2	SWD3764-2	SWD4164-2		E	E		E
70 13/16"(1799)												
72 5/16"(1837)	SWD2168-2	SWD2568-2	SWD2968-2	SWD3168-2	SWD3368-2	SWD3768-2	SWD4168-2		E	E		E

ELEVATION SYMBOL LEGEND:
M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.



2 WIDE UNITS

MO BRICKMOLD	46 1/4"(1175)	54 1/4"(1378)	62 1/4"(1581)	66 1/4"(1683)	70 1/4"(1784)	78 1/4"(1988)	86 1/4"(2191)
MO FLAT CASING	49 1/4"(1251)	57 1/4"(1454)	65 1/4"(1657)	69 1/4"(1759)	73 1/4"(1861)	81 1/4"(2064)	89 1/4"(2267)
ROUGH OPENING	43 1/2"(1105)	51 1/2"(1308)	59 1/2"(1511)	63 1/2"(1613)	67 1/2"(1715)	75 1/2"(1918)	83 1/2"(2121)
FRAME SIZE	42 3/4"(1086)	50 3/4"(1289)	58 3/4"(1492)	62 3/4"(1594)	66 3/4"(1695)	74 3/4"(1899)	82 3/4"(2102)
DAYLIGHT OPENING	14 13/16"(376)[2]	18 13/16"(478)[2]	22 13/16"(579)[2]	24 13/16"(630)[2]	26 13/16"(681)[2]	30 13/16"(783)[2]	34 13/16"(884)[2]

70 13/16"(1799) 72 5/16"(1837) 66 3/4"(1746) 35 1/4"(895) 23 1/4"(590)							
74 13/16"(1900) 76 5/16"(1938) 72 3/4"(1848) 72 (1829) 31 1/4"(794)[2]							
78 13/16"(2002) 80 5/16"(2040) 76 3/4"(1949) 76 (1930) 33 1/4"(841)[2]							
82 13/16"(2103) 84 5/16"(2142) 80 3/4"(2051) 80 (2032) 35 1/4"(895)[2]							
86 13/16"(2205) 88 5/16"(2244) 84 3/4"(2153) 84 (2134) 37 1/4"(940)[2]							
90 13/16"(2307) 92 5/16"(2346) 88 3/4"(2254) 88 (2235) 39 1/4"(997)[2]							
94 13/16"(2409) 96 5/16"(2448) 92 3/4"(2356) 92 (2337) 41 1/4"(1048)[2]							

ELEVATION SYMBOL LEGEND:
M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E 1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.



2 WIDE UNITS

MO BRICKMOLD 94 1/4"(2394)
MO FLAT CASING 97 1/4"(2470)
ROUGH OPENING 91 1/2"(2324)
FRAME SIZE 90 3/4"(2305)
DAYLIGHT OPENING 38 13/16"(986)[2]

MO BRICKMOLD 94 1/4"(2394)
MO FLAT CASING 97 1/4"(2470)
ROUGH OPENING 91 1/2"(2324)
FRAME SIZE 90 3/4"(2305)
DAYLIGHT OPENING 38 13/16"(986)[2]

34 13/16"(884) 36 5/16"(922) 32 3/4"(832) 32"(813) 11 1/4"(286)[2]		SWD4532-2
38 13/16"(986) 40 5/16"(1024) 36 3/4"(933) 36"(914) 13 1/4"(336)[2]		SWD4536-2
42 13/16"(1087) 44 5/16"(1126) 40 3/4"(1035) 40"(1016) 15 1/4"(387)[2]		SWD4540-2
46 13/16"(1189) 48 5/16"(1227) 44 3/4"(1137) 44"(1118) 17 1/4"(438)[2]		SWD4544-2
50 13/16"(1291) 52 5/16"(1329) 48 3/4"(1238) 48"(1219) 19 1/4"(489)[2]		SWD4548-2
54 13/16"(1392) 56 5/16"(1430) 52 3/4"(1340) 52"(1321) 21 1/4"(540)[2]		SWD4552-2
58 13/16"(1494) 60 5/16"(1532) 56 3/4"(1441) 56"(1422) 23 1/4"(590)[2]		SWD4556-2
62 13/16"(1595) 64 5/16"(1634) 60 3/4"(1543) 60"(1524) 25 1/4"(641)[2]		SWD4560-2
66 13/16"(1697) 68 5/16"(1735) 64 3/4"(1645) 64"(1626) 27 1/4"(689)[2]		SWD4564-2
70 13/16"(1799) 72 5/16"(1837) 68 3/4"(1746) 68"(1727) 29 1/4"(743)[2]		SWD4568-2

70 13/16"(1799) 72 5/16"(1837) 68 3/4"(1746) 68"(1727) 35 1/4"(895) 23 1/4"(590)		SWD4568-2
74 13/16"(1900) 76 5/16"(1938) 72 3/4"(1848) 72"(1829) 31 1/4"(794)[2]		SWD4572-2
78 13/16"(1986) 79 11/16"(2024) 76 3/4"(1949) 76"(1930) 33 1/4"(841)[2]		SWD4576-2
82 13/16"(2103) 84 5/16"(2142) 80 3/4"(2051) 80"(2032) 35 1/4"(895)[2]		SWD4580-2
86 13/16"(2207) 88 11/16"(2246) 84 3/4"(2154) 84"(2135) 37 1/4"(942)[2]		SWD4584-2
90 13/16"(2307) 92 11/16"(2346) 88 3/4"(2254) 88"(2235) 39 1/4"(997)[2]		SWD4588-2
94 13/16"(2408) 96 5/16"(2446) 92 3/4"(2356) 92"(2337) 41 1/4"(1048)[2]		SWD4592-2

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E 1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.



3 WIDE UNITS

	67 5/8"(1718)	79 5/8"(2022)	91 5/8"(2327)	97 5/8"(2481)	103 5/8"(2632)	115 5/8"(2937)
MO FLAT CASING	70 5/8"(1794)	82 5/8"(2099)	94 5/8"(2403)	100 5/8"(2556)	106 5/8"(2708)	118 5/8"(3013)
ROUGH OPENING	64 7/8"(1648)	76 7/8"(1953)	88 7/8"(2257)	94 7/8"(2410)	100 7/8"(2562)	112 7/8"(2867)
FRAME SIZE	64 1/8"(1629)	76 1/8"(1934)	88 1/8"(2238)	94 1/8"(2391)	100 1/8"(2543)	112 1/8"(2848)
DAYLIGHT OPENING	14 13/16"(376)[3]	18 13/16"(478)[3]	22 13/16"(579)[3]	24 13/16"(630)[3]	26 13/16"(681)[3]	30 13/16"(783)[3]
34 13/16"(884)						
36 5/16"(922)						
38 13/16"(986)						
40 5/16"(1024)						
42 13/16"(1087)						
44 5/16"(1126)						
46 13/16"(1189)						
48 5/16"(1227)						
50 13/16"(1291)						
52 5/16"(1329)						
54 13/16"(1392)						
56 5/16"(1430)						
58 13/16"(1494)						
60 5/16"(1532)						
62 13/16"(1595)						
64 5/16"(1634)						
66 13/16"(1697)						
68 5/16"(1735)						
70 13/16"(1799)						
72 5/16"(1837)						

ELEVATION SYMBOL LEGEND:


M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.




3 WIDE UNITS

MO BRICKMOLD	67 5/8"(1718)	79 5/8"(2022)	91 5/8"(2327)	97 5/8"(2481)	103 5/8"(2632)	115 5/8"(2937)
MO FLAT CASING	70 5/8"(1794)	82 5/8"(2099)	94 5/8"(2403)	100 5/8"(2556)	106 5/8"(2708)	118 5/8"(3013)
ROUGH OPENING	64 7/8"(1648)	76 7/8"(1953)	88 7/8"(2257)	94 7/8"(2410)	100 7/8"(2562)	112 7/8"(2867)
FRAME SIZE	64 1/8"(1629)	76 1/8"(1934)	88 1/8"(1992)	94 1/8"(1994)	100 1/8"(2543)	112 1/8"(1899)
DAYLIGHT OPENING	14 13/16"(376)[3]	18 13/16"(478)[3]	22 13/16"(579)[3]	24 13/16"(630)[3]	26 13/16"(681)[3]	30 13/16"(783)[3]


70 13/16"(1799)
72 5/16"(1837)
68 3/4"(1746)
68"(1727)
35 1/4"(895) 23 1/4"(590)

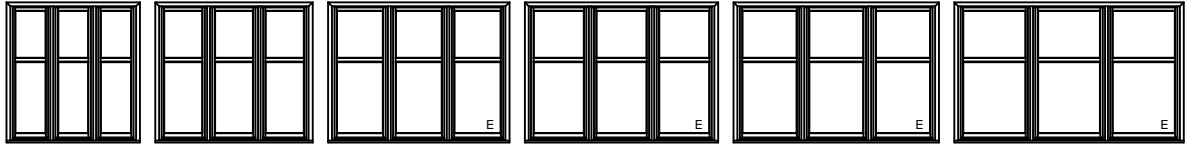


74 13/16"(1900)
76 5/16"(1938)
72 3/4"(1848)
72"(1829)
31 1/4"(794)[2]

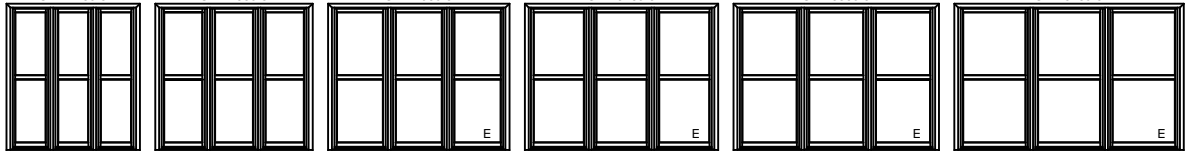


78 13/16"(2002)
80 5/16"(2040)
76 3/4"(1949)
76"(1930)
33 1/4"(841)[2]

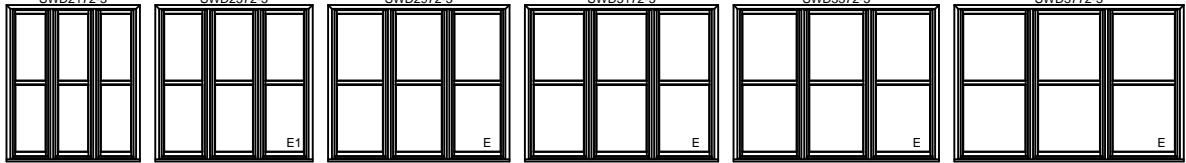


82 13/16"(2103)
84 5/16"(2142)
80 3/4"(2051)
80"(2032)
35 1/4"(895)[2]

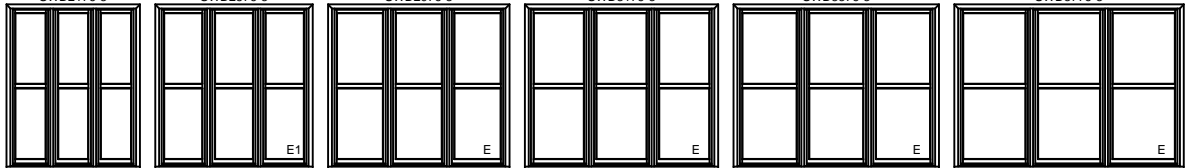

90 13/16"(2307)
92 5/16"(2345)
88 3/4"(2254)
88"(2235)
39 1/4"(997)[2]

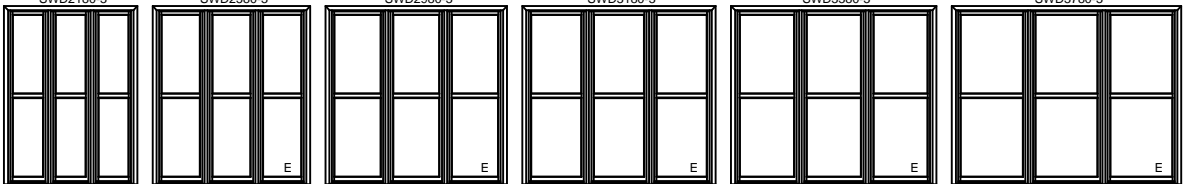

94 13/16"(2408)
96 5/16"(2446)
92 3/4"(2356)
92"(2337)
41 1/4"(1048)[2]

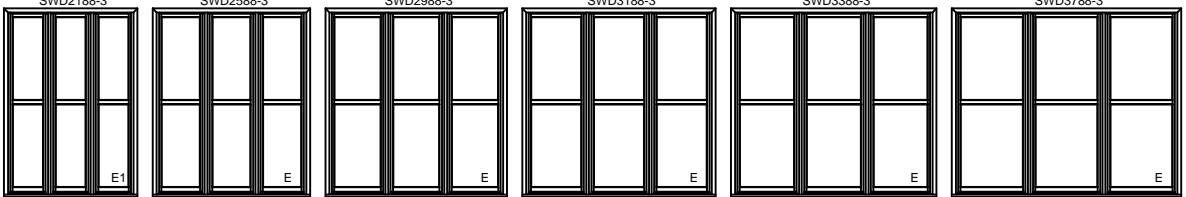

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.



3 WIDE UNITS

MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

127 5/8"(3242)
130 5/8"(3318)
124 7/8"(3172)
124 1/8"(3153)
34 13/16"(884)[3]

139 5/8"(3546)
142 5/8"(3623)
136 7/8"(3477)
136 1/8"(3458)
38 13/16"(986)[3]

34 13/16"(884)
36 5/16"(922)
32 3/4"(832)
32"(813)

38 13/16"(986)
40 5/16"(1024)
36 3/4"(933)
36"(914)

42 13/16"(1087)
44 5/16"(1126)
40 3/4"(1035)
40"(1016)

46 13/16"(1189)
48 5/16"(1227)
44 3/4"(1137)
44"(1118)

50 13/16"(1291)
52 5/16"(1329)
48 3/4"(1238)
48"(1219)

54 13/16"(1392)
56 5/16"(1430)
52 3/4"(1340)
52"(1321)

58 13/16"(1494)
60 5/16"(1532)
56 3/4"(1441)
56"(1422)

62 13/16"(1595)
64 5/16"(1634)
60 3/4"(1543)
60"(1524)

66 13/16"(1697)
68 5/16"(1735)
64 3/4"(1645)
64"(1626)

70 13/16"(1799)
72 5/16"(1837)
68 3/4"(1746)
68"(1727)

74 13/16"(1901)
76 5/16"(1939)
72 3/4"(1851)
72"(1832)

78 13/16"(2003)
80 5/16"(2041)
76 3/4"(1957)
76"(1938)

82 13/16"(2105)
84 5/16"(2143)
80 3/4"(2059)
80"(2040)

86 13/16"(2207)
88 5/16"(2245)
84 3/4"(2161)
84"(2142)

90 13/16"(2309)
92 5/16"(2347)
88 3/4"(2263)
88"(2244)

94 13/16"(2411)
96 5/16"(2449)
92 3/4"(2365)
92"(2346)

98 13/16"(2513)
100 5/16"(2551)
96 3/4"(2467)
96"(2448)


102 13/16"(2615)
104 5/16"(2653)
100 3/4"(2569)
100"(2550)



SWD4132-3



SWD4532-3



SWD4136-3




SWD4536-3




SWD4140-3



SWD4540-3




SWD4144-3




SWD4544-3




SWD4148-3



SWD4548-3



SWD4152-3



SWD4552-3




SWD4156-3



SWD4556-3



SWD4160-3




SWD4560-3




SWD4164-3




SWD4564-3




SWD4168-3



SWD4568-3



SWD4172-3



SWD4572-3




SWD4176-3



SWD4576-3



SWD4180-3



SWD4580-3




SWD4184-3



SWD4584-3



SWD4188-3



SWD4588-3

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING

VALUES IN () ARE IN MILLIMETER CONVERSIONS

VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT

E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.

E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.



3 WIDE UNITS

MO BRICKMOLD	127 5/8"(3242)	139 5/8"(3546)
MO FLAT CASING	130 5/8"(3318)	142 5/8"(3623)
ROUGH OPENING	124 7/8"(3172)	136 7/8"(3477)
FRAME SIZE	124 1/8"(3153)	136 1/8"(3458)
DAYLIGHT OPENING	34 13/16"(884)[3]	38 13/16"(986)[3]

70 13/16"(1799) 72 5/16"(1837) 68 3/4"(1746) 68"(1727) 35 1/4"(895) 23 1/4"(590)		
	SWD4168-3	SWD4568-3
74 13/16"(1900) 76 5/16"(1938) 72 3/4"(1848) 72"(1829) 31 1/4"(794)[2]		
	SWD4172-3	SWD4572-3
78 13/16"(2002) 80 5/16"(2040) 76 3/4"(1949) 76"(1890) 33 1/4"(841)[2]		
	SWD4176-3	SWD4576-3
82 13/16"(2103) 84 5/16"(2142) 80 3/4"(2051) 80"(2032) 35 1/4"(895)[2]		
	SWD4180-3	SWD4580-3
90 13/16"(2307) 92 5/16"(2345) 88 3/4"(2254) 88"(2235) 39 1/4"(997)[2]		
	SWD4188-3	SWD4588-3
94 13/16"(2408) 96 5/16"(2446) 92 3/4"(2356) 92"(2337) 41 1/4"(1048)[2]		
	SWD4192-3	SWD4592-3

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
 E 1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.



PICTURE UNITS

M.O. BRICKMOULD	24 7/8"(632)	28 7/8"(733)	32 7/8"(835)	34 7/8"(886)	36 7/8"(937)	40 7/8"(1038)	44 7/8"(1140)
M.O. ADAMS/FLAT CASING	22 7/8"(708)	31 7/8"(810)	35 7/8"(911)	37 7/8"(962)	39 7/8"(1013)	43 7/8"(1114)	47 7/8"(1216)
ROUGH OPENING	21 1/8"(562)	26 1/8"(664)	30 1/8"(765)	32 1/8"(816)	34 1/8"(867)	38 1/8"(968)	42 1/8"(1070)
FRAME SIZE	21 3/8"(543)	25 3/8"(645)	29 3/8"(747)	31 3/8"(797)	33 3/8"(848)	37 3/8"(949)	41 3/8"(1051)
DAYLIGHT OPENING	14 13/16"(376)	18 13/16"(478)	22 13/16"(579)	24 13/16"(630)	26 13/16"(681)	30 13/16"(783)	34 13/16"(884)
34 13/16"(884) 40 1/8"(1038) 33 3/4"(852) 32 7/8"(835) 24 27/32"(631)							
36 13/16"(937) 42 1/8"(1070) 36 3/4"(924) 35 7/8"(911) 28 27/32"(733)							
42 13/16"(1087) 48 1/8"(1216) 40 3/4"(1035) 40 1/2"(1041) 32 27/32"(834)							
46 13/16"(1189) 49 5/16"(1227) 44 3/4"(1137) 44 1/2"(1138) 36 27/32"(936)							
50 13/16"(1291) 52 5/16"(1329) 48 3/4"(1238) 48 1/2"(1219) 40 27/32"(1037)							
54 13/16"(1382) 56 5/16"(1420) 52 3/4"(1340) 52 1/2"(1321) 44 27/32"(1139)							
58 13/16"(1494) 60 5/16"(1532) 56 3/4"(1441) 56 1/2"(1422) 48 27/32"(1241)							

ELEVATION SYMBOL LEGEND:

VALUES IN () ARE IN MILLIMETER CONVERSIONS

E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS

NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING



PICTURE UNITS

	24 7/8"(632)	28 7/8"(733)	32 7/8"(835)	34 7/8"(886)	36 7/8"(937)	40 7/8"(1038)	44 7/8"(1140)
M.O. BRICKMOULD	27 7/8"(708)	31 7/8"(810)	35 7/8"(911)	37 7/8"(962)	39 7/8"(1013)	43 7/8"(1114)	47 7/8"(1216)
M.O. ADAMS/FLAT CASING	22 1/8"(562)	26 1/8"(664)	30 1/8"(765)	32 1/8"(816)	34 1/8"(867)	38 1/8"(968)	42 1/8"(1070)
ROUGH OPENING	21 3/8"(543)	25 3/8"(645)	29 3/8"(746)	31 3/8"(797)	33 3/8"(848)	37 3/8"(949)	41 3/8"(1051)
FRAME SIZE	14 13/16"(376)	18 13/16"(478)	22 13/16"(579)	24 13/16"(630)	26 13/16"(681)	30 13/16"(783)	34 13/16"(884)
DAYLIGHT OPENING							
	35 50*	35 50*	35 50*	35 50*	35 50*	35 50*	35 50*
62 13/16"(1595)							
64 5/16"(1634)							
60 3/4"(1543)							
60"(1524)							
52 27/32"(1342)							
	SWDP2160	SWDP2560	SWDP2960	SWDP3160	SWDP3360	SWDP3760	SWDP4160
	35 50*	35 50*	35 50*	35 50*	35 50*	35 50*	35 50*
66 13/16"(1697)							
68 5/16"(1735)							
64 3/4"(1645)							
64"(1626)							
56 27/32"(1444)							
	SWDP2164	SWDP2564	SWDP2964	SWDP3164	SWDP3364	SWDP3764	SWDP4164
	35 50*	35 50*	35 50*	35 50*	35 50*	35 50*	35 50*
70 13/16"(1799)							
72 5/16"(1837)							
68 3/4"(1746)							
68"(1727)							
60 27/32"(1545)							
	SWDP2168	SWDP2568	SWDP2968	SWDP3168	SWDP3368	SWDP3768	SWDP4168
	35 50*	35 50*	35 50*	35 50*	35 50*	35 50*	35 50*
74 13/16"(1900)							
76 5/16"(1938)							
72 3/4"(1848)							
72"(1829)							
64 27/32"(1647)							
	SWDP2172	SWDP2572	SWDP2972	SWDP3172	SWDP3372	SWDP3772	SWDP4172
	35 50*	35 50*	35 50*	35 50*	35 50*	35 50*	35 50*
78 13/16"(2002)							
80 5/16"(2040)							
76 3/4"(1949)							
76"(1930)							
68 27/32"(1749)							
	SWDP2176	SWDP2576	SWDP2976	SWDP3176	SWDP3376	SWDP3776	SWDP4176

ELEVATION SYMBOL LEGEND: E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
 VALUES IN () ARE IN MILLIMETER CONVERSIONS E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
 ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING



PICTURE UNITS

	24 7/8"(632)	28 7/8"(733)	32 7/8"(835)	34 7/8"(886)	36 7/8"(937)	40 7/8"(1038)	44 7/8"(1140)
M.O. BRICKMOUND	27 7/8"(708)	31 7/8"(810)	35 7/8"(911)	37 7/8"(962)	39 7/8"(1013)	43 7/8"(1114)	47 7/8"(1216)
M.O. ADAMS/FLAT CASING	22 1/8"(562)	26 1/8"(664)	30 1/8"(765)	32 1/8"(816)	34 1/8"(867)	38 1/8"(968)	42 1/8"(1070)
ROUGH OPENING	21 3/8"(543)	25 3/8"(645)	29 3/8"(747)	31 3/8"(797)	33 3/8"(848)	37 3/8"(949)	41 3/8"(1051)
FRAME SIZE	14 13/16"(376)	18 13/16"(478)	22 13/16"(579)	24 13/16"(630)	26 13/16"(681)	30 13/16"(783)	34 13/16"(884)
DAYLIGHT OPENING							
	82 13/16"(2103) 84 5/16"(2142) 80 3/4"(2051) 80"(2032) 72 27/32"(1850)						
	SWDP2180	SWDP2580	SWDP2980	SWDP3180	SWDP3380	SWDP3780	SWDP4180
	90 13/16"(2307) 92 5/16"(2345) 88 3/4"(2254) 88"(2235) 80 27/32"(2053)						
	SWDP2188	SWDP2588	SWDP2988	SWDP3188	SWDP3388	SWDP3788	SWDP4188
	94 13/16"(2408) 96 5/16"(2446) 92 3/4"(2356) 92"(2337) 84 27/32"(2155)						
	SWDP2192	SWDP2592	SWDP2992	SWDP3192	SWDP3392	SWDP3792	SWDP4192

ELEVATION SYMBOL LEGEND:

VALUES IN () ARE IN MILLIMETER CONVERSIONS
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
 ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING



PICTURE UNITS

M.O. BRICKMOUND
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)

52 7/8"(1343)
55 7/8"(1419)
50 1/8"(1273)
49 3/8"(1254)
42 13/16"(1087)

56 7/8"(1445)
59 7/8"(1521)
54 1/8"(1375)
53 3/8"(1356)
46 13/16"(1189)

64 7/8"(1648)
67 7/8"(1724)
62 1/8"(1578)
61 3/8"(1559)
54 13/16"(1392)

34 13/16"(884) 36 5/16"(922) 32 3/4"(832) 32"(813) 24 27/32"(631)				
38 13/16"(986) 40 5/16"(1024) 36 3/4"(933) 36"(914) 28 27/32"(733)				
42 13/16"(1087) 44 5/16"(1126) 40 3/4"(1035) 40"(1016) 32 27/32"(834)				
46 13/16"(1189) 48 5/16"(1227) 44 3/4"(1137) 44"(1118) 36 27/32"(936)				
50 13/16"(1291) 52 5/16"(1329) 48 3/4"(1238) 48"(1219) 40 27/32"(1037)				
54 13/16"(1392) 56 5/16"(1430) 52 3/4"(1340) 52"(1321) 44 27/32"(1139)				
58 13/16"(1494) 60 5/16"(1532) 56 3/4"(1441) 56"(1422) 48 27/32"(1241)				

ELEVATION SYMBOL LEGEND:


- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING




PICTURE UNITS

M.O. BRICKMOULD	48 7/8"(1241)	52 7/8"(1343)	56 7/8"(1445)	64 7/8"(1648)
M.O. ADAMS/FLAT CASING	51 7/8"(1318)	55 7/8"(1419)	59 7/8"(1521)	67 7/8"(1724)
ROUGH OPENING	46 1/8"(1172)	50 1/8"(1273)	54 1/8"(1375)	62 1/8"(1578)
FRAME SIZE	45 3/8"(1153)	49 3/8"(1254)	53 3/8"(1356)	61 3/8"(1559)
DAYLIGHT OPENING	38 13/16"(986)	42 13/16"(1087)	46 13/16"(1189)	54 13/16"(1392)


62 13/16"(1595)
64 5/16"(1634)
60 3/4"(1543)
60"(1524)
52 27/32"(1342)

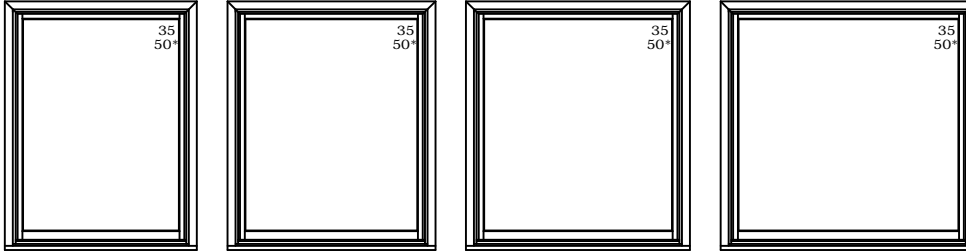


66 13/16"(1697)
68 5/16"(1735)
64 3/4"(1645)
64"(1626)
56 27/32"(1444)

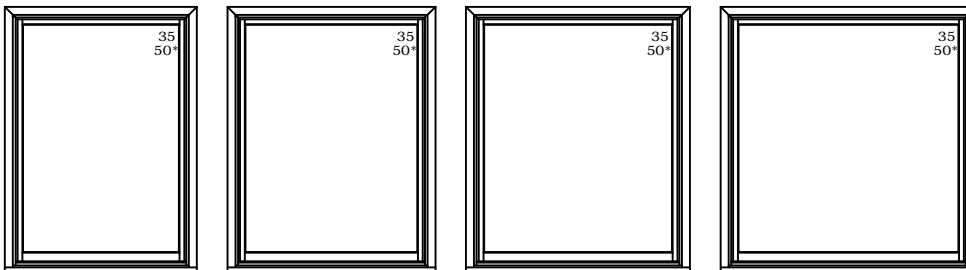


70 13/16"(1799)
72 5/16"(1837)
68 3/4"(1746)
68"(1727)
60 27/32"(1545)

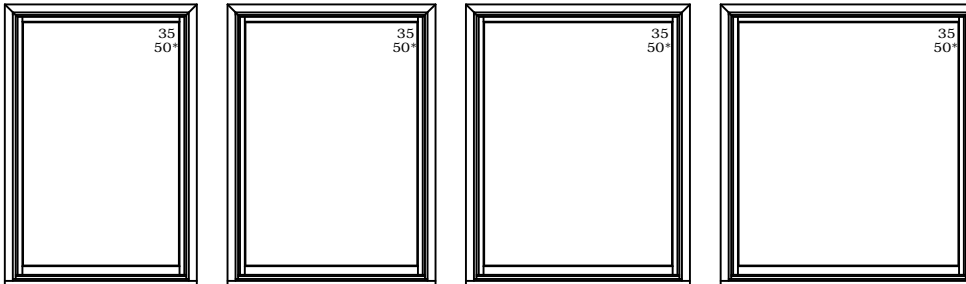

74 13/16"(1900)
76 5/16"(1938)
72 3/4"(1848)
72"(1829)
64 27/32"(1647)

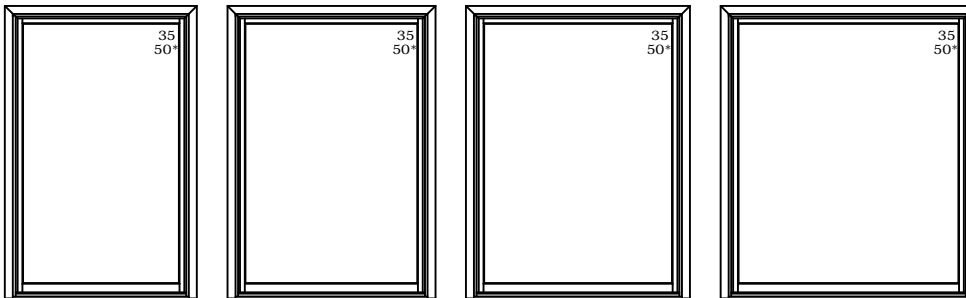

78 13/16"(2002)
80 5/16"(2040)
76 3/4"(1948)
76"(1930)
68 27/32"(1749)

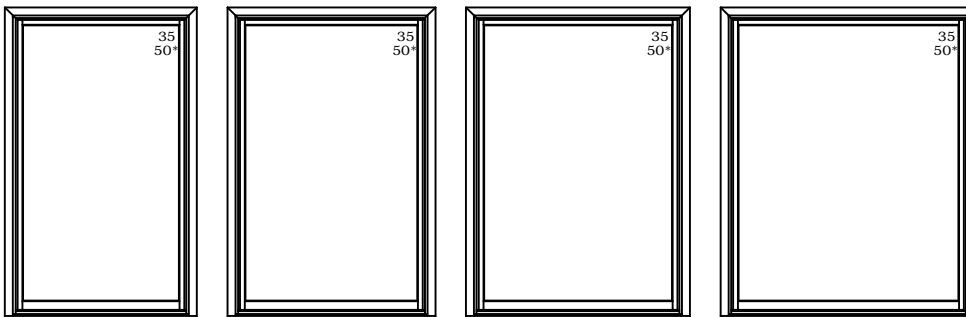


ELEVATION SYMBOL LEGEND: E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
VALUES IN () ARE IN MILLIMETER CONVERSIONS E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING



PICTURE UNITS

M.O. BRICKMOULD	48 7/8"(1241)	52 7/8"(1343)	56 7/8"(1445)	64 7/8"(1648)
M.O. ADAMS/FLAT CASING	51 7/8"(1318)	55 7/8"(1419)	59 7/8"(1521)	67 7/8"(1724)
ROUGH OPENING	46 1/8"(1172)	50 1/8"(1273)	54 1/8"(1375)	62 1/8"(1578)
FRAME SIZE	45 3/8"(1153)	49 3/8"(1254)	53 3/8"(1356)	61 3/8"(1559)
DAYLIGHT OPENING	38 13/16"(986)	42 13/16"(1087)	46 13/16"(1189)	54 13/16"(1392)

82 13/16"(2103)
84 5/16"(2142)
80 3/4"(2051)
80"(2032)
72 27/32"(1850)

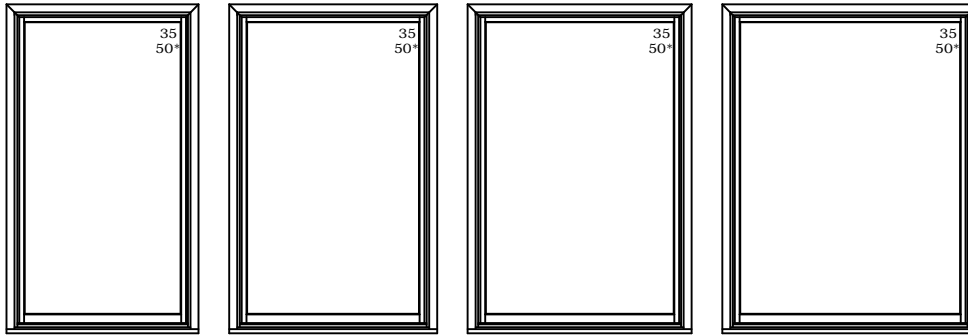

90 13/16"(2307)
92 5/16"(2345)
88 3/4"(2254)
88"(2235)
80 27/32"(2053)

94 13/16"(2408)
96 5/16"(2446)
92 3/4"(2356)
92"(2337)
84 27/32"(2155)

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING




PICTURE UNITS

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

72 7/8"(1851)
75 7/8"(1927)
70 1/8"(1781)
69 3/8"(1762)
62 13/16"(1595)

80 7/8"(2054)
83 7/8"(2130)
78 1/8"(1984)
77 3/8"(1965)
70 13/16"(1799)

34 13/16"(884)
36 5/16"(922)
32 3/4"(832)
32"(813)
24 27/32"(631)




SWDP6932




SWDP7732

38 13/16"(986)
40 5/16"(1024)
36 3/4"(933)
36"(914)
28 27/32"(733)



SWDP6936



SWDP7736

42 13/16"(1087)
44 5/16"(1126)
40 3/4"(1035)
40"(1016)
32 27/32"(834)



SWDP6940




SWDP7740

46 13/16"(1189)
48 5/16"(1227)
44 3/4"(1137)
44"(1118)
36 27/32"(936)




SWDP6944




SWDP7744

50 13/16"(1291)
52 5/16"(1329)
48 3/4"(1238)
48"(1219)
40 27/32"(1037)




SWDP6948




SWDP7748

54 13/16"(1392)
56 5/16"(1430)
52 3/4"(1340)
52"(1321)
44 27/32"(1139)




SWDP6952



SWDP7752

58 13/16"(1494)
60 5/16"(1532)
56 3/4"(1441)
56"(1422)
48 27/32"(1241)



SWDP6956



SWDP7756

ELEVATION SYMBOL LEGEND:
VALUES IN () ARE IN MILLIMETER CONVERSIONS


E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING




PICTURE UNITS

M.O. BRICKMOULD	72 7/8"(1851)	80 7/8"(2054)
M.O. ADAMS/FLAT CASING	75 7/8"(1927)	83 7/8"(2130)
ROUGH OPENING	70 1/8"(1781)	78 1/8"(1984)
FRAME SIZE	69 3/8"(1762)	77 3/8"(1965)
DAYLIGHT OPENING	62 13/16"(1595)	70 13/16"(1799)

62 13/16"(1595)
64 5/16"(1634)
60 3/4"(1543)
60 1/2"(1524)
52 27/32"(1342)




SWDP6960




SWDP7760

66 13/16"(1687)
68 5/16"(1735)
64 3/4"(1645)
64 1/2"(1626)
56 27/32"(1444)




SWDP6964




SWDP7764

70 13/16"(1799)
72 5/16"(1837)
68 3/4"(1746)
68 1/2"(1727)
60 27/32"(1545)




SWDP6968




SWDP7768

74 13/16"(1900)
76 5/16"(1938)
72 3/4"(1848)
72 1/2"(1829)
64 27/32"(1647)




SWDP6972




SWDP7772

78 13/16"(2002)
80 5/16"(2040)
76 3/4"(1949)
76 1/2"(1930)
68 27/32"(1749)



SWDP6976



SWDP7776

ELEVATION SYMBOL LEGEND: E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
 VALUES IN () ARE IN MILLIMETER CONVERSIONS ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING




PICTURE UNITS

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


72 7/8"(1851)
75 7/8"(1927)
70 1/8"(1781)
69 3/8"(1762)
62 13/16"(1595)

80 7/8"(2054)
83 7/8"(2130)
78 1/8"(1984)
77 3/8"(1965)
70 13/16"(1799)

82 13/16"(2103)
84 5/16"(2142)
80 3/4"(2051)
80"(2032)
72 27/32"(1850)




SWDP6980




SWDP7780

90 13/16"(2307)
92 5/16"(2345)
88 3/4"(2254)
88"(2235)
80 27/32"(2053)

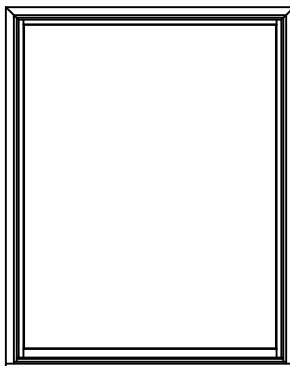


SWDP6988




SWDP7788

94 13/16"(2408)
96 5/16"(2446)
92 3/4"(2356)
92"(2337)
84 27/32"(2155)

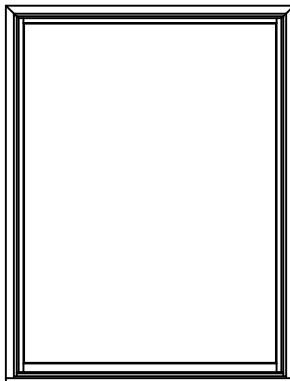

SWDP6992



SWDP7792

ELEVATION SYMBOL LEGEND:


- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING



PICTURE UNITS WITH 16" FLANKERS

MO BRICKMOLD	102 5/8"(2607)	107 5/8"(2734)
MO FLAT CASING	105 5/8"(2683)	110 5/8"(2810)
ROUGH OPENING	96 7/8"(2461)	104 7/8"(2664)
FRAME SIZE	96 1/8"(2442)	104 1/8"(2645)
DAYLIGHT OPENING	14 13/16"(376)[2] 46 13/16"(1189)	14 13/16"(376)[2] 54 13/16"(1392)

54 13/16"(1392)
56 5/16"(1430)
52 3/4"(1340)
52"(1321)
21 1/4"(540)[2]




SWDP6152-16



SWDP6952-16

58 13/16"(1494)
60 5/16"(1532)
56 3/4"(1441)
56"(1422)
23 1/4"(590)[2]




SWDP6156-16




SWDP6956-16

66 13/16"(1657)
68 5/16"(1737)
64 3/4"(1645)
64"(1626)
27 1/4"(689)[2]



SWDP6164-16



SWDP6964-16


ELEVATION SYMBOL LEGEND:
M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.



PICTURE UNITS WITH 22" FLANKERS

MO BRICKMOLD	107 5/8"(2734)	115 5/8"(2937)
MO FLAT CASING	110 5/8"(2810)	118 5/8"(3013)
ROUGH OPENING	104 7/8"(2664)	112 7/8"(2867)
FRAME SIZE	104 1/8"(2645)	112 1/8"(2848)
DAYLIGHT OPENING	18 13/16"(478)[2] 46 13/16"(1189)	18 13/16"(478)[2] 54 13/16"(1392)


54 13/16"(1392)
56 5/16"(1430)
52 3/4"(1340)
52"(1321)
21 1/4"(540)[2]



SWDP6152-20

SWDP6952-20


58 13/16"(1494)
60 5/16"(1532)
56 3/4"(1441)
56"(1422)
23 1/4"(590)[2]



SWDP6156-20

SWDP6956-20

66 13/16"(1687)
68 5/16"(1735)
64 3/4"(1645)
64"(1626)
27 1/4"(689)[2]



SWDP6164-20

SWDP6964-20









































ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E 1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.



PICTURE RADIUS UNITS

M.O. BRICKMOULD	24 7/8"(632)	28 7/8"(733)	32 7/8"(835)	34 7/8"(886)	36 7/8"(937)	40 7/8"(1038)	44 7/8"(1140)
M.O. ADAMS/FLAT CASING	27 7/8"(708)	31 7/8"(810)	35 7/8"(911)	37 7/8"(962)	39 7/8"(1013)	43 7/8"(1114)	47 7/8"(1216)
ROUGH OPENING	22 1/8"(562)	26 1/8"(664)	30 1/8"(765)	32 1/8"(816)	34 1/8"(867)	38 1/8"(968)	42 1/8"(1070)
FRAME SIZE	21 3/8"(543)	25 3/8"(645)	29 3/8"(747)	31 3/8"(797)	33 3/8"(848)	37 3/8"(949)	41 3/8"(1051)
DAYLIGHT OPENING	14 13/16"(376)	18 13/16"(478)	22 13/16"(579)	24 13/16"(630)	26 13/16"(681)	30 13/16"(783)	34 13/16"(884)

54 13/16"(1392) 56 5/16"(1430) 52 3/4"(1340) 52"(1321) 44 27/32"(1139)								
	SWDHP2152	SWDHP2552	SWDHP2952	SWDHP3152	SWDHP3352	SWDHP3752	SWDHP4152	
58 13/16"(1494) 60 5/16"(1532) 56 3/4"(1441) 56"(1422) 48 27/32"(1241)								
	SWDHP2156	SWDHP2556	SWDHP2956	SWDHP3156	SWDHP3356	SWDHP3756	SWDHP4156	
62 13/16"(1595) 64 5/16"(1634) 60 3/4"(1543) 60"(1524) 52 27/32"(1342)								
	SWDHP2160	SWDHP2560	SWDHP2960	SWDHP3160	SWDHP3360	SWDHP3760	SWDHP4160	
66 13/16"(1697) 68 5/16"(1735) 64 3/4"(1645) 64"(1626) 56 27/32"(1444)								
	SWDHP2164	SWDHP2564	SWDHP2964	SWDHP3164	SWDHP3364	SWDHP3764	SWDHP4164	
70 13/16"(1799) 72 5/16"(1837) 68 3/4"(1746) 68"(1727) 60 27/32"(1545)								
	SWDHP2168	SWDHP2568	SWDHP2968	SWDHP3168	SWDHP3368	SWDHP3768	SWDHP4168	

ELEVATION SYMBOL LEGEND:


- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING



PICTURE RADIUS UNITS


M.O. BRICKMOULD	24 7/8"(632)	28 7/8"(733)	32 7/8"(835)	34 7/8"(886)	36 7/8"(937)	40 7/8"(1038)	44 7/8"(1140)
M.O. ADAMS/FLAT CASING	27 7/8"(708)	31 7/8"(810)	35 7/8"(911)	37 7/8"(962)	39 7/8"(1013)	43 7/8"(1114)	47 7/8"(1216)
ROUGH OPENING	22 1/8"(562)	26 1/8"(664)	30 1/8"(765)	32 1/8"(816)	34 1/8"(867)	38 1/8"(968)	42 1/8"(1070)
FRAME SIZE	21 3/8"(543)	25 3/8"(645)	29 3/8"(747)	31 3/8"(797)	33 3/8"(848)	37 3/8"(949)	41 3/8"(1051)
DAYLIGHT OPENING	14 13/16"(376)	18 13/16"(478)	22 13/16"(579)	24 13/16"(630)	26 13/16"(681)	30 13/16"(783)	34 13/16"(884)

74 13/16"(1900)
76 5/16"(1939)
72 3/4"(1848)
72"(1829)
64 27/32"(1647)

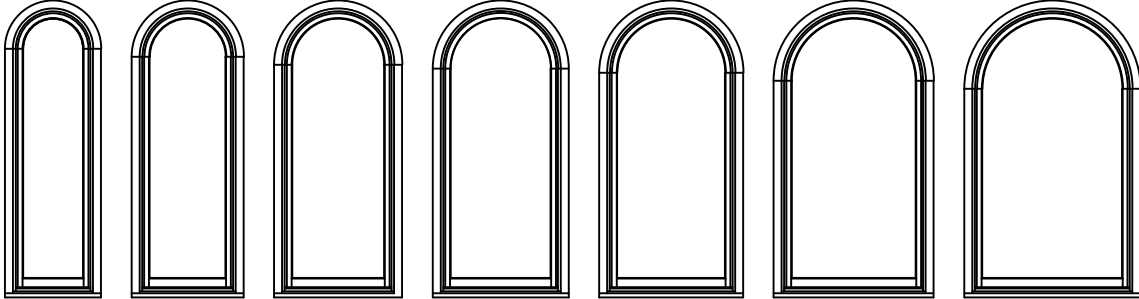


SWDHP2172 SWDHP2572 SWDHP2972 SWDHP3172 SWDHP3372 SWDHP3772 SWDHP4172

78 13/16"(2002)
80 5/16"(2040)
76 3/4"(1949)
76"(1930)
68 27/32"(1749)

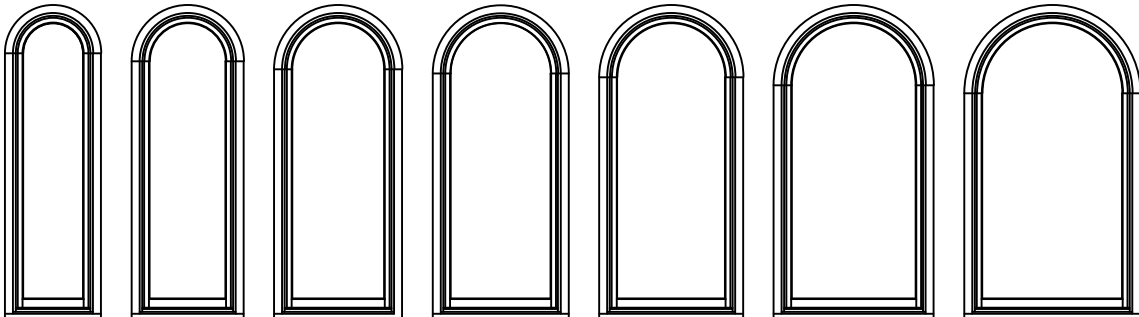


SWDHP2176 SWDHP2576 SWDHP2976 SWDHP3176 SWDHP3376 SWDHP3776 SWDHP4176

82 3/16"(2088)
83 11/16"(2126)
80 3/4"(2051)
80"(2032)
72 27/32"(1850)

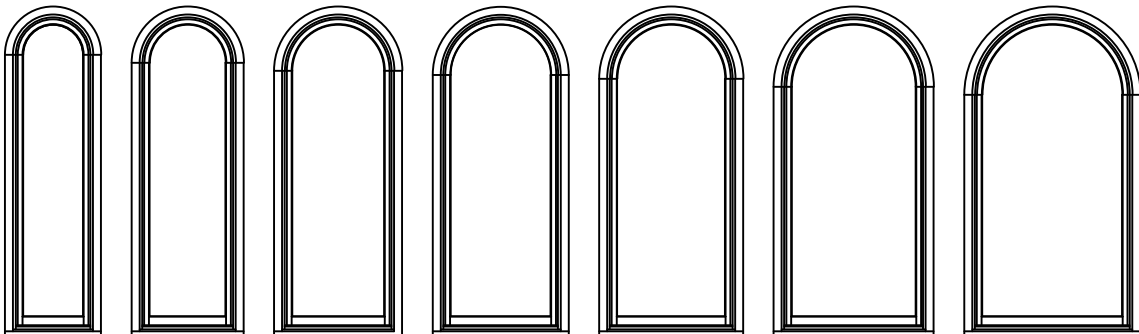

SWDHP2180 SWDHP2580 SWDHP2980 SWDHP3180 SWDHP3380 SWDHP3780 SWDHP4180

90 3/16"(2291)
91 11/16"(2329)
88 3/4"(2254)
88"(2235)
80 27/32"(2053)

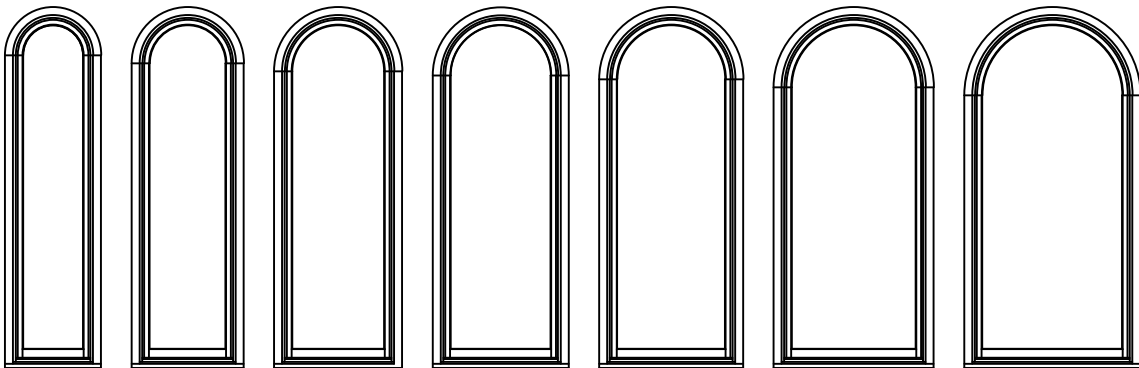

SWDHP2188 SWDHP2588 SWDHP2988 SWDHP3188 SWDHP3388 SWDHP3788 SWDHP4188

ELEVATION SYMBOL LEGEND:


- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING



PICTURE RADIUS UNITS

M.O. BRICKMOULD	24 7/8"(632)	28 7/8"(733)	32 7/8"(835)	34 7/8"(886)	36 7/8"(937)	40 7/8"(1038)	44 7/8"(1140)
M.O. ADAMS/FLAT CASING	27 7/8"(708)	31 7/8"(810)	35 7/8"(911)	37 7/8"(962)	39 7/8"(1013)	43 7/8"(1114)	47 7/8"(1216)
ROUGH OPENING	22 1/8"(562)	26 1/8"(664)	30 1/8"(765)	32 1/8"(816)	34 1/8"(867)	38 1/8"(968)	42 1/8"(1070)
FRAME SIZE	21 3/8"(543)	25 3/8"(645)	29 3/8"(747)	31 3/8"(797)	33 3/8"(848)	37 3/8"(949)	41 3/8"(1051)
DAYLIGHT OPENING	14 13/16"(376)	18 13/16"(478)	22 13/16"(579)	24 13/16"(630)	26 13/16"(681)	30 13/16"(783)	34 13/16"(884)

94 13/16"(2408)
96 5/16"(2446)
92 3/4"(2356)
84 27/32"(2155)

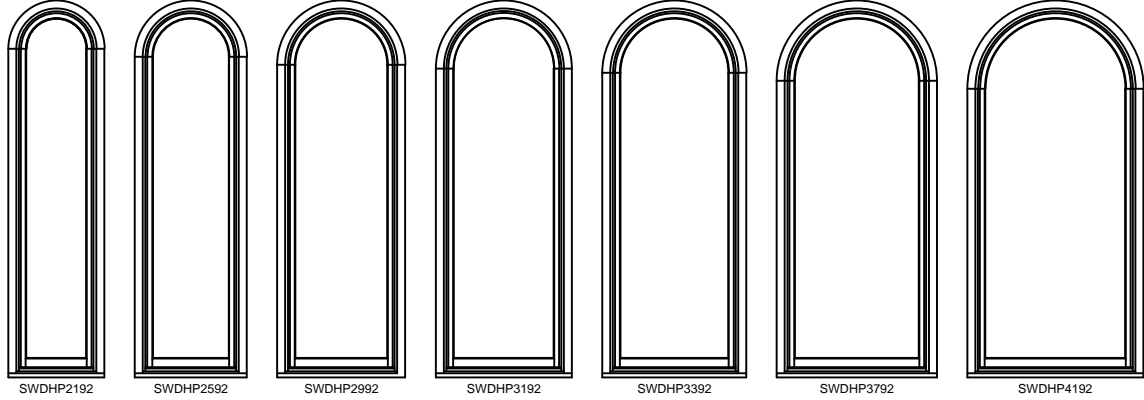

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING



PICTURE RADIUS UNITS

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)

52 7/8"(1343)
55 7/8"(1419)
50 1/8"(1273)
49 3/8"(1254)
42 13/16"(1087)


56 7/8"(1445)
59 7/8"(1521)
54 1/8"(1375)
53 3/8"(1356)
46 13/16"(1189)

64 7/8"(1648)
67 7/8"(1724)
62 1/8"(1578)
61 3/8"(1559)
54 13/16"(1392)


54 13/16"(1392)
56 5/16"(1430)
52 3/4"(1340)
52"(1321)
44 27/32"(1139)




SWDHP4552



SWDHP4952




SWDHP5352




SWDHP6152


58 13/16"(1494)
60 5/16"(1532)
56 3/4"(1441)
56"(1422)
48 27/32"(1241)




SWDHP4556



SWDHP4956




SWDHP5356




SWDHP6156


62 13/16"(1595)
64 5/16"(1634)
60 3/4"(1543)
60"(1524)
52 27/32"(1342)




SWDHP4560



SWDHP4960




SWDHP5360




SWDHP6160


66 13/16"(1697)
68 5/16"(1735)
64 3/4"(1645)
64"(1626)
56 27/32"(1444)




SWDHP4564



SWDHP4964




SWDHP5364




SWDHP6164


70 13/16"(1799)
72 5/16"(1837)
68 3/4"(1746)
68"(1727)
60 27/32"(1545)




SWDHP4568



SWDHP4968



SWDHP5368



SWDHP6168

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING



PICTURE RADIUS UNITS

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)

52 7/8"(1343)
55 7/8"(1419)
50 1/8"(1273)
49 3/8"(1254)
42 13/16"(1087)


56 7/8"(1445)
59 7/8"(1521)
54 1/8"(1375)
53 3/8"(1356)
46 13/16"(1189)

64 7/8"(1648)
67 7/8"(1724)
62 1/8"(1578)
61 3/8"(1559)
54 13/16"(1392)


74 13/16"(1900)
76 5/16"(1938)
72 3/4"(1848)
72"(1829)
64 27/32"(1647)




SWDHP4572



SWDHP4972




SWDHP5372




SWDHP6172


78 13/16"(2002)
80 5/16"(2040)
76 3/4"(1948)
76"(1930)
68 27/32"(1749)




SWDHP4576



SWDHP4976




SWDHP5376




SWDHP6176


82 13/16"(2103)
84 5/16"(2142)
80 3/4"(2051)
80"(2032)
72 27/32"(1850)




SWDHP4580



SWDHP4980




SWDHP5380




SWDHP6180


80 13/16"(2037)
82 5/16"(2075)
88 3/4"(2254)
88"(2235)
80 27/32"(2053)




SWDHP4588

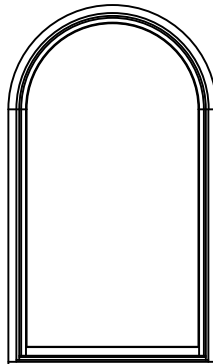

SWDHP4988

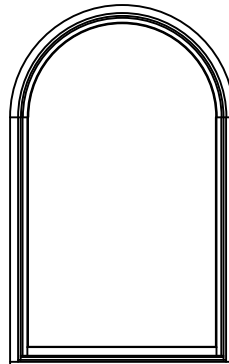

SWDHP5388

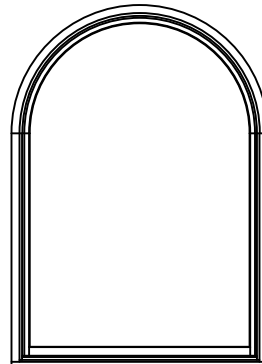

SWDHP6188

ELEVATION SYMBOL LEGEND:


VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING



PICTURE RADIUS UNITS

M.O. BRICKMOULD	48 7/8"(1241)	52 7/8"(1343)	56 7/8"(1445)	64 7/8"(1648)
M.O. ADAMS/FLAT CASING	51 7/8"(1318)	55 7/8"(1419)	59 7/8"(1521)	67 7/8"(1724)
ROUGH OPENING	46 1/8"(1172)	50 1/8"(1273)	54 1/8"(1375)	62 1/8"(1578)
FRAME SIZE	45 3/8"(1153)	49 3/8"(1254)	53 3/8"(1356)	61 3/8"(1559)
DAYLIGHT OPENING	38 13/16"(986)	42 13/16"(1087)	46 13/16"(1189)	54 13/16"(1392)

94 13/16"(2408)
96 5/16"(2446)
92 3/4"(2356)
92"(2337)
84 27/32"(2155)

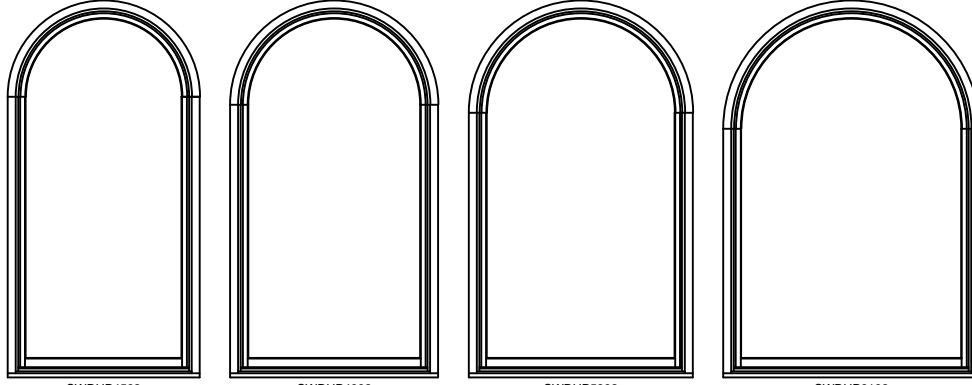

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING




PICTURE RADIUS UNITS

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


72 7/8"(1851)
75 7/8"(1927)
70 1/8"(1781)
69 3/8"(1762)
62 13/16"(1595)

80 7/8"(2054)
83 7/8"(2130)
78 1/8"(1984)
77 3/8"(1965)
70 13/16"(1799)

54 13/16"(1392)
56 5/16"(1430)
52 3/4"(1340)
52"(1321)
44 27/32"(1139)




SWDHP6952




SWDHP7752

58 13/16"(1494)
60 5/16"(1532)
56 3/4"(1441)
56"(1422)
48 27/32"(1241)




SWDHP6956




SWDHP7756

62 13/16"(1595)
64 5/16"(1634)
60 3/4"(1543)
60"(1524)
52 27/32"(1342)




SWDHP6960




SWDHP7760

66 13/16"(1697)
68 5/16"(1735)
64 3/4"(1645)
64"(1626)
56 27/32"(1444)




SWDHP6964




SWDHP7764

70 13/16"(1799)
72 5/16"(1837)
68 3/4"(1746)
68"(1727)
60 27/32"(1545)



SWDHP6968



SWDHP7768

VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING




PICTURE RADIUS UNITS

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


72 7/8"(1851)
75 7/8"(1927)
70 1/8"(1781)
69 3/8"(1762)
62 13/16"(1595)

80 7/8"(2054)
83 7/8"(2130)
78 1/8"(1984)
77 3/8"(1965)
70 13/16"(1799)

74 13/16"(1900)
76 5/16"(1938)
72 3/4"(1848)
72"(1829)
64 27/32"(1647)




SWDHP6972




SWDHP7772

78 13/16"(2002)
80 5/16"(2040)
76 3/4"(1949)
76"(1930)
68 27/32"(1749)




SWDHP6976




SWDHP7776

82 13/16"(2103)
84 5/16"(2142)
80 3/4"(2051)
80"(2032)
72 27/32"(1850)




SWDHP6980




SWDHP7780

90 13/16"(2307)
92 5/16"(2346)
88 3/4"(2254)
88"(2235)
80 27/32"(2053)

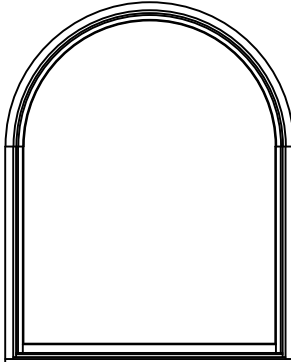

SWDHP6988

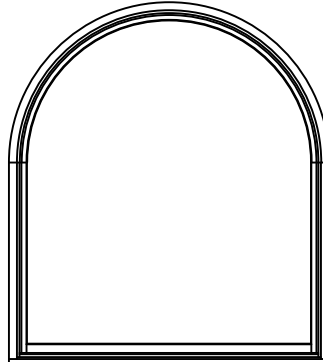

SWDHP7788

ELEVATION SYMBOL LEGEND:

VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING




PICTURE RADIUS UNITS

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


72 7/8"(1851)
75 7/8"(1927)
70 1/8"(1781)
69 3/8"(1762)
62 13/16"(1595)

80 7/8"(2054)
83 7/8"(2130)
78 1/8"(1984)
77 3/8"(1965)
70 13/16"(1799)

94 13/16"(2408)
96 5/16"(2446)
92 3/4"(2356)
92"(2337)
84 27/32"(2155)

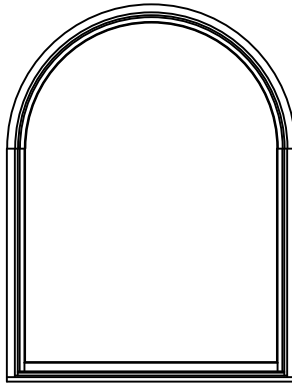

SWDHP6992

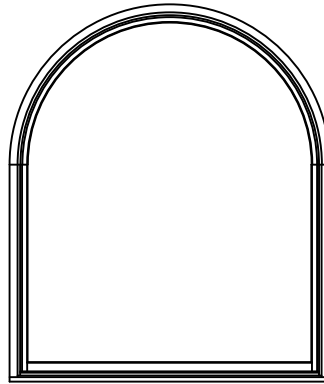

SWDHP7792

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING



TRANSOM UNITS

M.O. BRICKMOULD	24 7/8"(632)	28 7/8"(733)	32 7/8"(835)	34 7/8"(886)	36 7/8"(937)	40 7/8"(1038)	44 7/8"(1140)
M.O. ADAMS/FLAT CASING	27 7/8"(708)	31 7/8"(810)	35 7/8"(911)	37 7/8"(962)	39 7/8"(1013)	43 7/8"(1114)	47 7/8"(1216)
ROUGH OPENING	22 1/8"(562)	26 1/8"(664)	30 1/8"(765)	32 1/8"(816)	34 1/8"(867)	38 1/8"(968)	42 1/8"(1070)
FRAME SIZE	21 3/8"(543)	25 3/8"(645)	29 3/8"(747)	31 3/8"(797)	33 3/8"(848)	37 3/8"(949)	41 3/8"(1051)
DAYLIGHT OPENING	14 13/16"(376)	18 13/16"(478)	22 13/16"(579)	24 13/16"(630)	26 13/16"(681)	30 13/16"(783)	34 13/16"(884)
	17 13/16"(452) 19 5/16"(491) 15 3/4"(400) 15"(381) 8 13/32"(214)						
	20 13/16"(529) 22 5/16"(567) 18 3/4"(476) 18"(457) 11 13/32"(290)						
	26 13/16"(681) 28 5/16"(719) 24 3/4"(629) 24"(610) 17 13/32"(456)						
	SWDT2152	SWDT2552	SWDT2952	SWDT3152	SWDT3352	SWDT3752	SWDT4152
	SWDT2156	SWDT2556	SWDT2956	SWDT3156	SWDT3356	SWDT3756	SWDT4156
	SWDT2164	SWDT2564	SWDT2964	SWDT3164	SWDT3364	SWDT3764	SWDT4164

ELEVATION SYMBOL LEGEND:

VALUES IN () ARE IN MILLIMETER CONVERSIONS
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
 ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING



TRANSOM UNITS







	48 7/8"(1241)	52 7/8"(1343)	56 7/8"(1445)	64 7/8"(1648)
M.O. BRICKMOULD	51 7/8"(1318)	55 7/8"(1419)	59 7/8"(1521)	67 7/8"(1724)
M.O. ADAMS/FLAT CASING	46 1/8"(1172)	50 1/8"(1273)	54 1/8"(1375)	62 1/8"(1578)
ROUGH OPENING	45 3/8"(1153)	49 3/8"(1254)	53 3/8"(1356)	61 3/8"(1559)
FRAME SIZE	38 13/16"(986)	42 13/16"(1087)	46 13/16"(1189)	54 13/16"(1392)
DAYLIGHT OPENING	17 13/16"(452)			
	19 5/16"(491)			
	15 3/4"(400)			
	15"(381)			
	8 13/32"(214)			
	20 13/16"(529)			
	22 5/16"(567)			
	18 3/4"(476)			
	18"(457)			
	11 13/32"(290)			
	26 13/16"(681)			
	28 5/16"(719)			
	24 3/4"(629)			
	24 1/2"(610)			
	17 13/32"(456)			
	SWDT4552	SWDT4952	SWDT5352	SWDT6152
	SWDT4556	SWDT4956	SWDT5356	SWDT6156
	SWDT4564	SWDT4964	SWDT5364	SWDT6164

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING



TRANSOM UNITS

	72 7/8"(1851)	80 7/8"(2054)
M.O. BRICKMOULD	75 7/8"(1927)	83 7/8"(2130)
M.O. ADAMS/FLAT CASING	70 1/8"(1781)	78 1/8"(1984)
ROUGH OPENING	69 3/8"(1762)	77 3/8"(1965)
FRAME SIZE	62 13/16"(1595)	70 13/16"(1799)
DAYLIGHT OPENING		
17 13/16"(452)		
19 5/16"(491)	SWDT6952	SWDT7752
15 3/4"(400)		
15"(381)		
8 13/32"(214)		
20 13/16"(629)		
22 5/16"(567)	SWDT6956	SWDT7756
18 3/4"(476)		
18"(457)		
11 13/32"(290)		
26 13/16"(681)		
28 5/16"(719)	SWDT6964	SWDT7764
24 3/4"(629)		
24"(610)		
17 13/32"(456)		


ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING



SECTOR TOP UNITS

M.O. BRICKMOULD	24 7/8"(632)	28 7/8"(733)	32 7/8"(835)	34 7/8"(886)	36 7/8"(937)	40 7/8"(1038)	44 7/8"(1140)
M.O. ADAMS/FLAT CASING	27 7/8"(708)	31 7/8"(810)	35 7/8"(911)	37 7/8"(962)	39 7/8"(1013)	43 7/8"(1114)	47 7/8"(1216)
ROUGH OPENING	22 1/8"(562)	26 1/8"(664)	30 1/8"(765)	32 1/8"(816)	34 1/8"(867)	38 1/8"(968)	42 1/8"(1070)
FRAME SIZE	21 3/8"(543)	25 3/8"(645)	29 3/8"(747)	31 3/8"(797)	33 3/8"(848)	37 3/8"(949)	41 3/8"(1051)
DAYLIGHT OPENING	14 13/16"(376)	18 13/16"(478)	22 13/16"(579)	24 13/16"(630)	26 13/16"(681)	30 13/16"(783)	34 13/16"(884)

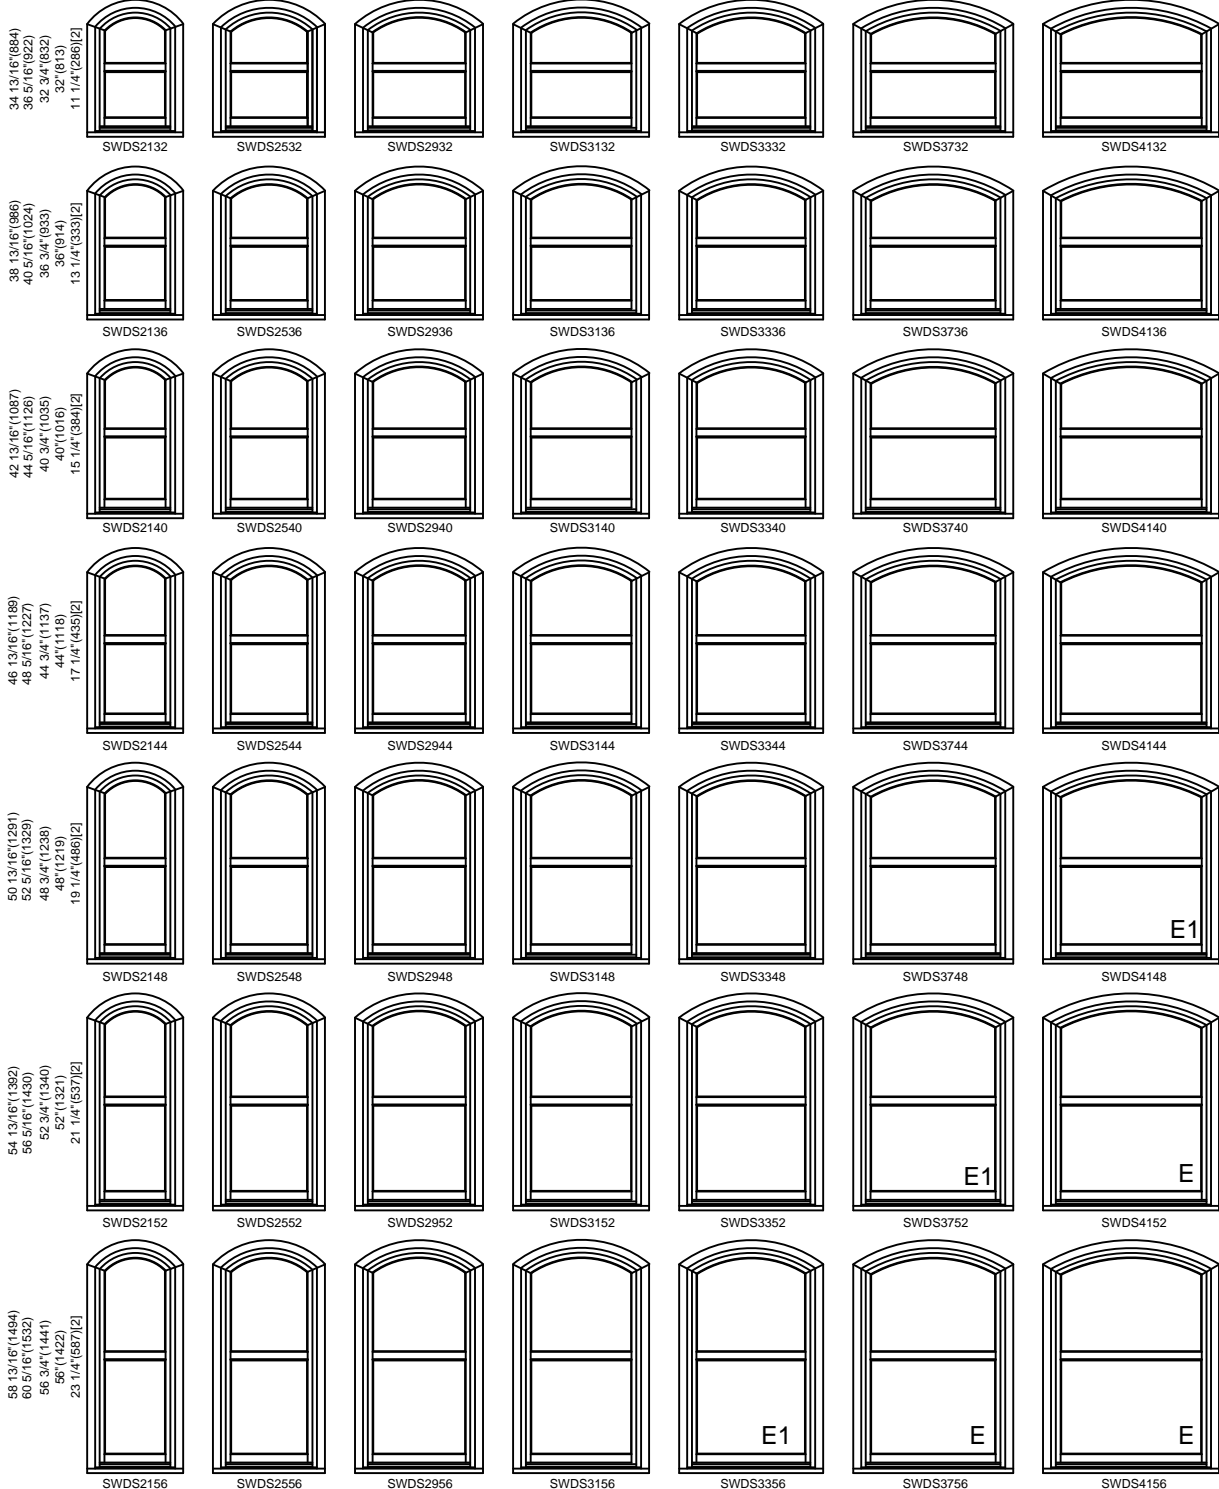

ELEVATION SYMBOL LEGEND:

- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING


VALUES IN () ARE IN MILLIMETER CONVERSIONS




SECTOR TOP UNITS

M.O. BRICKMOLD	24 7/8"(632)	28 7/8"(733)	32 7/8"(835)	34 7/8"(886)	36 7/8"(937)	40 7/8"(1038)	44 7/8"(1140)
M.O. ADAMS/FLAT CASING	27 7/8"(709)	31 7/8"(810)	35 7/8"(911)	37 7/8"(962)	39 7/8"(1013)	43 7/8"(1114)	47 7/8"(1216)
ROUGH OPENING	22 1/8"(562)	26 1/8"(664)	30 1/8"(765)	32 1/8"(816)	34 1/8"(867)	38 1/8"(968)	42 1/8"(1070)
FRAME SIZE	21 3/8"(543)	25 3/8"(645)	29 3/8"(747)	31 3/8"(797)	33 3/8"(848)	37 3/8"(949)	41 3/8"(1051)
DAYLIGHT OPENING	14 13/16"(376)	18 13/16"(478)	22 13/16"(579)	24 13/16"(630)	26 13/16"(681)	30 13/16"(783)	34 13/16"(884)


62 13/16"(1595)
64 5/16"(1634)
60 3/4"(1543)
60"(1524)
25 1/4"(638)[2]

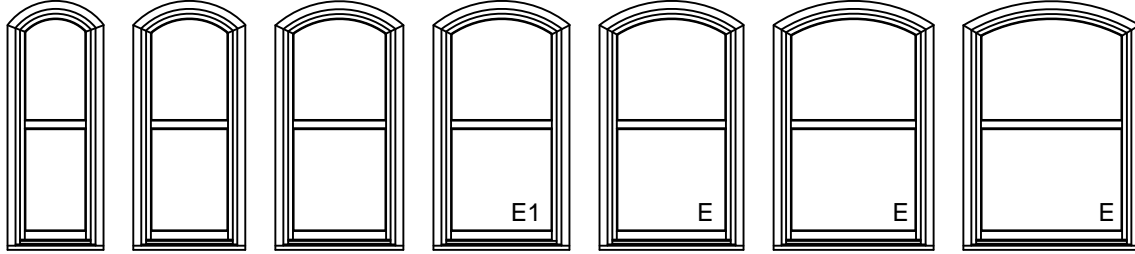


66 13/16"(1687)
68 5/16"(1735)
64 3/4"(1645)
64"(1626)
27 1/4"(689)[2]

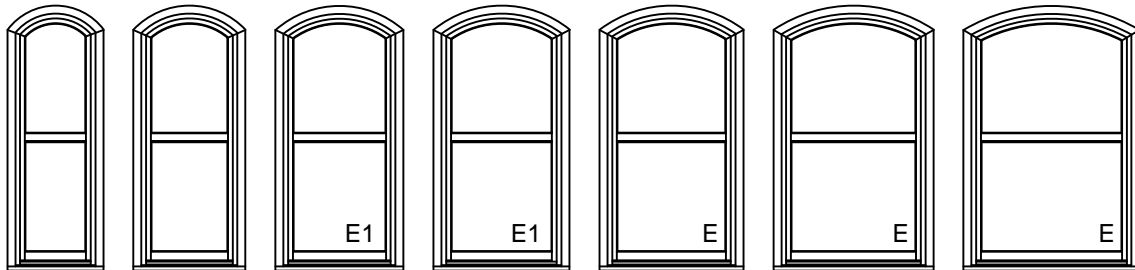


70 13/16"(1789)
72 5/16"(1837)
68 3/4"(1746)
68"(1727)
29 1/4"(740)[2]

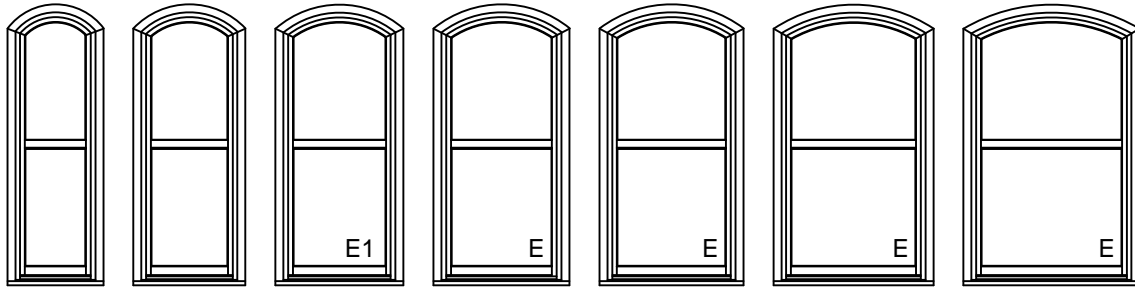

74 13/16"(1900)
76 5/16"(1938)
72 3/4"(1848)
72"(1829)
31 1/4"(791)[2]

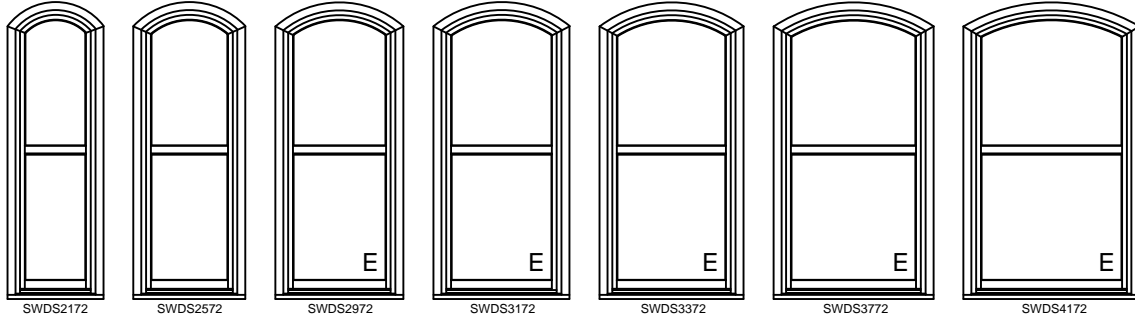

78 13/16"(2002)
80 5/16"(2040)
76 3/4"(1949)
76"(1930)
33 1/4"(841)[2]

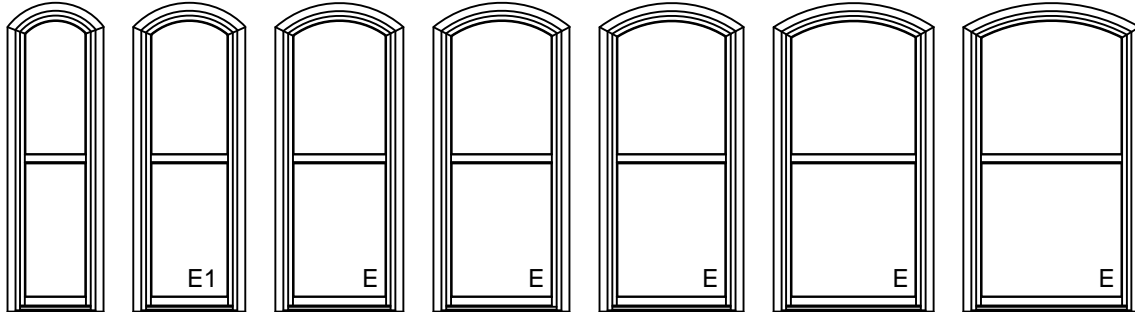


ELEVATION SYMBOL LEGEND:
VALUES IN () ARE IN MILLIMETER CONVERSIONS

BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT. FOR FIRST FLOOR EGRESS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING



SECTOR TOP UNITS

M.O. BRICKMOULD	24 7/8"(632)	28 7/8"(733)	32 7/8"(835)	34 7/8"(886)	36 7/8"(937)	40 7/8"(1038)	44 7/8"(1140)
M.O. ADAMS/FLAT CASING	27 7/8"(708)	31 7/8"(810)	35 7/8"(911)	37 7/8"(962)	39 7/8"(1013)	43 7/8"(1114)	47 7/8"(1216)
ROUGH OPENING	22 1/8"(562)	26 1/8"(664)	30 1/8"(765)	32 1/8"(816)	34 1/8"(867)	38 1/8"(968)	42 1/8"(1070)
FRAME SIZE	21 3/8"(543)	25 3/8"(645)	29 3/8"(747)	31 3/8"(797)	33 3/8"(848)	37 3/8"(949)	41 3/8"(1051)
DAYLIGHT OPENING	14 13/16"(376)	18 13/16"(478)	22 13/16"(579)	24 13/16"(630)	26 13/16"(681)	30 13/16"(783)	34 13/16"(884)

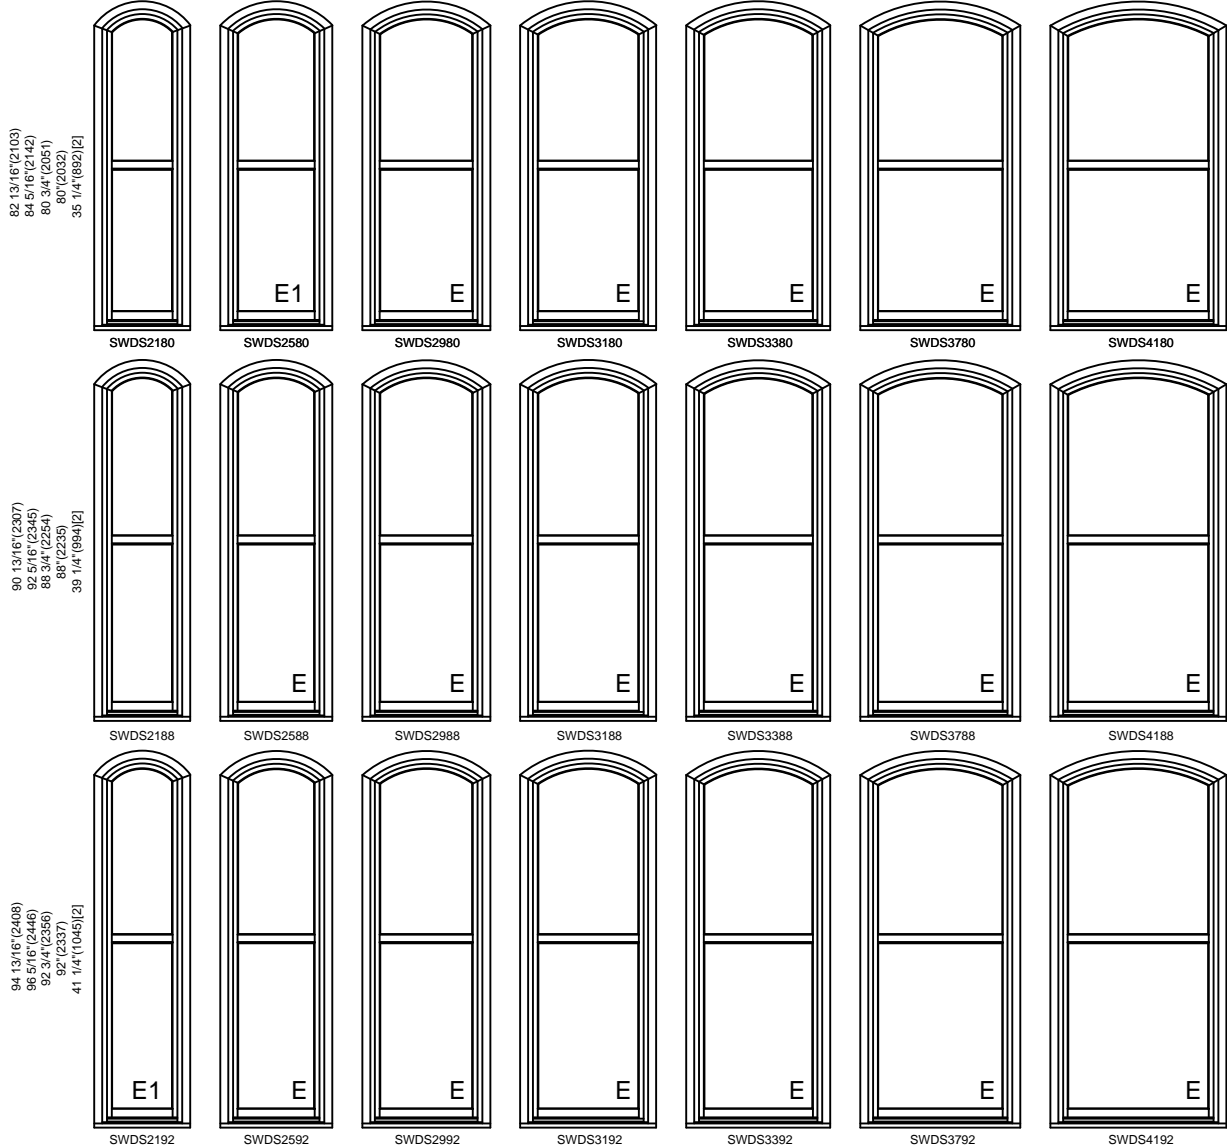

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING




SECTOR TOP UNITS

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)




SWDS4532




SWDS4536




SWDS4540




SWDS4544



SWDS4548




SWDS4552




SWDS4556

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)




SWDS4560




SWDS4564



SWDS4568



SWDS4572



SWDS4576

62 13/16"(1595)
64 5/16"(1634)
60 3/4"(1543)
60"(1524)
25 1/4"(638)[2]

66 13/16"(1697)
68 5/16"(1735)
64 3/4"(1645)
64"(1626)
27 1/4"(689)[2]


70 13/16"(1799)
72 5/16"(1837)
68 3/4"(1746)
68"(1727)
29 1/4"(740)[2]

74 13/16"(1900)
76 5/16"(1938)
72 3/4"(1848)
72"(1829)
31 1/4"(791)[2]


78 13/16"(2002)
80 5/16"(2040)
76 3/4"(1949)
76"(1930)
33 1/4"(841)[2]

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)



SWDS4580

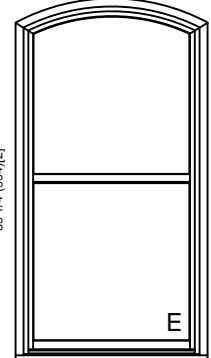

SWDS4588

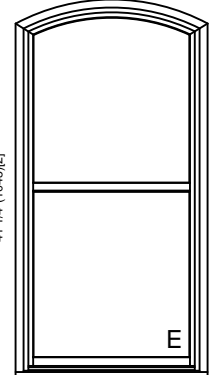

SWDS4592

82 13/16"(2103)
84 5/16"(2142)
80 3/4"(2051)
80"(2032)
35 1/4"(892)[2]

90 13/16"(2307)
92 5/16"(2345)
88 3/4"(2254)
88"(2235)
39 1/4"(994)[2]

94 13/16"(2408)
96 5/16"(2446)
92 3/4"(2355)
92"(2337)
41 1/4"(1045)[2]

ELEVATION SYMBOL LEGEND:

VALUES IN () ARE IN MILLIMETER CONVERSIONS

E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.

E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS

NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING



2 WIDE SECTOR TOP UNITS

MO BRICKMOLD	46 1/4"(1175)	54 1/4"(1378)	62 1/4"(1581)	66 1/4"(1683)	70 1/4"(1784)	78 1/4"(1988)	86 1/4"(2191)
MO FLAT CASING	49 1/4"(1251)	57 1/4"(1454)	65 1/4"(1657)	69 1/4"(1759)	73 1/4"(1861)	81 1/4"(2064)	89 1/4"(2267)
ROUGH OPENING	43 1/2"(1105)	51 1/2"(1308)	59 1/2"(1511)	63 1/2"(1613)	67 1/2"(1715)	75 1/2"(1918)	83 1/2"(2121)
FRAME SIZE	42 3/4"(1086)	50 3/4"(1289)	58 3/4"(1492)	62 3/4"(1594)	66 3/4"(1695)	74 3/4"(1899)	82 3/4"(2102)
DAYLIGHT OPENING	14 13/16"(376)[2]	18 13/16"(478)[2]	22 13/16"(579)[2]	24 13/16"(630)[2]	26 13/16"(681)[2]	30 13/16"(783)[2]	34 13/16"(884)[2]

34 13/16"(884)							
SWDS2132-2	SWDS2532-2	SWDS2932-2	SWDS3132-2	SWDS3332-2	SWDS3732-2	SWDS4132-2	
36 5/16"(922)							
38 13/16"(986)	SWDS2136-2	SWDS2536-2	SWDS2936-2	SWDS3136-2	SWDS3336-2	SWDS3736-2	SWDS4136-2
40 5/16"(1024)							
42 13/16"(1087)	SWDS2140-2	SWDS2540-2	SWDS2940-2	SWDS3140-2	SWDS3340-2	SWDS3740-2	SWDS4140-2
44 5/16"(1126)							
46 13/16"(1189)	SWDS2144-2	SWDS2544-2	SWDS2944-2	SWDS3144-2	SWDS3344-2	SWDS3744-2	SWDS4144-2
48 5/16"(1227)							
50 13/16"(1291)	SWDS2148-2	SWDS2548-2	SWDS2948-2	SWDS3148-2	SWDS3348-2	SWDS3748-2	SWDS4148-2
52 5/16"(1329)							
54 13/16"(1392)	SWDS2152-2	SWDS2552-2	SWDS2952-2	SWDS3152-2	SWDS3352-2	SWDS3752-2	SWDS4152-2
56 5/16"(1430)							
58 13/16"(1494)	SWDS2156-2	SWDS2556-2	SWDS2956-2	SWDS3156-2	SWDS3356-2	SWDS3756-2	SWDS4156-2
60 5/16"(1532)							
62 13/16"(1595)	SWDS2160-2	SWDS2560-2	SWDS2960-2	SWDS3160-2	SWDS3360-2	SWDS3760-2	SWDS4160-2
64 5/16"(1634)							
66 13/16"(1697)	SWDS2164-2	SWDS2564-2	SWDS2964-2	SWDS3164-2	SWDS3364-2	SWDS3764-2	SWDS4164-2
68 5/16"(1735)							
70 13/16"(1799)	SWDS2168-2	SWDS2568-2	SWDS2968-2	SWDS3168-2	SWDS3368-2	SWDS3768-2	SWDS4168-2
72 5/16"(1837)							


ELEVATION SYMBOL LEGEND:
M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.



2 WIDE SECTOR TOP UNITS


MO BRICKMOLD	46 1/4"(1175)	54 1/4"(1378)	62 1/4"(1581)	66 1/4"(1683)	70 1/4"(1784)	78 1/4"(1988)	86 1/4"(2191)
MO FLAT CASING	49 1/4"(1251)	57 1/4"(1454)	65 1/4"(1657)	69 1/4"(1759)	73 1/4"(1861)	81 1/4"(2064)	89 1/4"(2267)
ROUGH OPENING	43 1/2"(1105)	51 1/2"(1308)	59 1/2"(1511)	63 1/2"(1613)	67 1/2"(1715)	75 1/2"(1918)	83 1/2"(2121)
FRAME SIZE	42 3/4"(1086)	50 3/4"(1289)	58 3/4"(1492)	62 3/4"(1594)	66 3/4"(1695)	74 3/4"(1899)	82 3/4"(2102)
DAYLIGHT OPENING	14 13/16"(376)[2]	18 13/16"(478)[2]	22 13/16"(579)[2]	24 13/16"(630)[2]	26 13/16"(681)[2]	30 13/16"(783)[2]	34 13/16"(884)[2]

74 13/16"(1900)
76 5/16"(1938)
72 3/4"(1848)
72"(1829)
31 1/4"(794)[2]

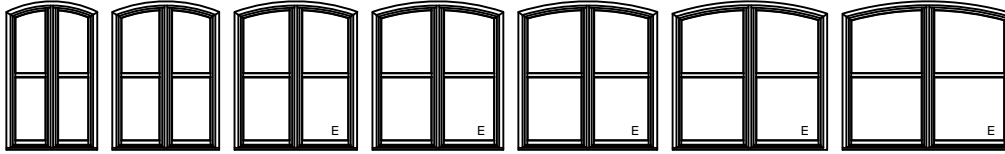


SWDS2172-2 SWDS2572-2 SWDS2972-2 SWDS3172-2 SWDS3372-2 SWDS3772-2 SWDS4172-2

78 13/16"(2002)
80 5/16"(2040)
76 3/4"(1949)
76"(1930)
33 1/4"(841)[2]

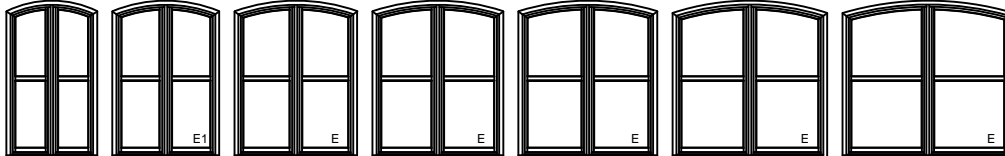


SWDS2176-2 SWDS2576-2 SWDS2976-2 SWDS3176-2 SWDS3376-2 SWDS3776-2 SWDS4176-2

82 13/16"(2103)
84 5/16"(2142)
80 3/4"(2051)
80"(2032)
35 1/4"(895)[2]

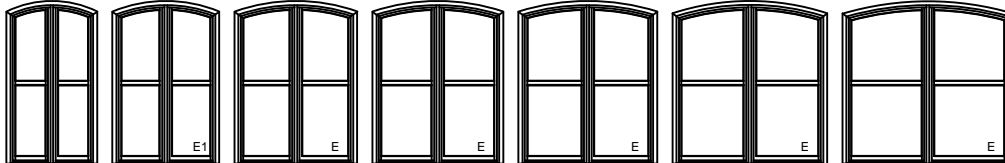


SWDS2180-2 SWDS2580-2 SWDS2980-2 SWDS3180-2 SWDS3380-2 SWDS3780-2 SWDS4180-2

90 13/16"(2307)
92 5/16"(2345)
88 3/4"(2254)
86"(2235)
39 1/4"(997)[2]

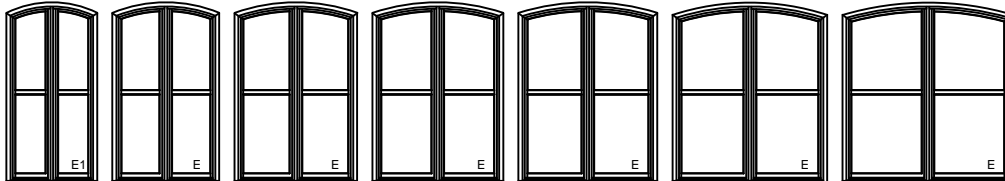

SWDS2188-2 SWDS2588-2 SWDS2988-2 SWDS3188-2 SWDS3388-2 SWDS3788-2 SWDS4188-2

94 13/16"(2408)
96 5/16"(2446)
92 3/4"(2355)
92"(2337)
41 1/4"(1048)[2]

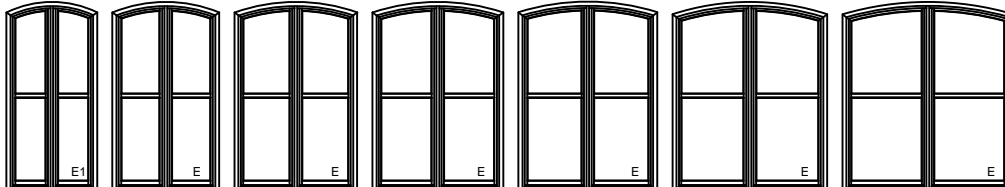

SWDS2192-2 SWDS2592-2 SWDS2992-2 SWDS3192-2 SWDS3392-2 SWDS3792-2 SWDS4192-2

ELEVATION SYMBOL LEGEND:
M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.



2 WIDE SECTOR TOP UNITS

MO BRICKMOLD 94 1/4"(2394)
MO FLAT CASING 97 1/4"(2470)
ROUGH OPENING 91 1/2"(2324)
FRAME SIZE 90 3/4"(2305)
DAYLIGHT OPENING 38 13/16"(986)[2]

MO BRICKMOLD 94 1/4"(2394)
MO FLAT CASING 97 1/4"(2470)
ROUGH OPENING 91 1/2"(2324)
FRAME SIZE 90 3/4"(2305)
DAYLIGHT OPENING 38 13/16"(986)[2]

34 13/16"(884)
36 5/16"(922)
32 3/4"(832)
32"(813)
36 1/4"(914)
13 1/4"(336)[2]



SWDS4532-2

38 13/16"(986)
40 5/16"(1024)
36 3/4"(933)
36"(914)
42 13/16"(1087)
44 5/16"(1126)
40 3/4"(1035)
40"(1016)
15 1/4"(387)[2]



SWDS4536-2

42 13/16"(1087)
44 5/16"(1126)
40 3/4"(1035)
40"(1016)
46 13/16"(1189)
48 5/16"(1227)
44 3/4"(1137)
44"(1118)
17 1/4"(438)[2]



SWDS4540-2

46 13/16"(1189)
48 5/16"(1227)
44 3/4"(1137)
44"(1118)
50 13/16"(1291)
52 5/16"(1329)
48 3/4"(1238)
48"(1219)
19 1/4"(489)[2]



SWDS4544-2

50 13/16"(1291)
52 5/16"(1329)
48 3/4"(1238)
48"(1219)
54 13/16"(1382)
56 5/16"(1420)
52 3/4"(1340)
52"(1321)
21 1/4"(540)[2]



SWDS4548-2

54 13/16"(1382)
56 5/16"(1420)
52 3/4"(1340)
52"(1321)
58 13/16"(1494)
60 5/16"(1532)
56 3/4"(1441)
56"(1422)
23 1/4"(590)[2]



SWDS4552-2

58 13/16"(1494)
60 5/16"(1532)
56 3/4"(1441)
56"(1422)
62 13/16"(1595)
64 5/16"(1634)
60 3/4"(1543)
60"(1524)
25 1/4"(641)[2]



SWDS4556-2

62 13/16"(1595)
64 5/16"(1634)
60 3/4"(1543)
60"(1524)
66 13/16"(1687)
68 5/16"(1735)
64 3/4"(1645)
64"(1626)
27 1/4"(689)[2]



SWDS4560-2

66 13/16"(1687)
68 5/16"(1735)
64 3/4"(1645)
64"(1626)
70 13/16"(1799)
72 5/16"(1837)
68 3/4"(1746)
68"(1727)
29 1/4"(743)[2]



SWDS4564-2

70 13/16"(1799)
72 5/16"(1837)
68 3/4"(1746)
68"(1727)
74 13/16"(1900)
76 5/16"(1938)
72 3/4"(1848)
72"(1829)
31 1/4"(794)[2]



SWDS4568-2

74 13/16"(1900)
76 5/16"(1938)
72 3/4"(1848)
72"(1829)
31 1/4"(794)[2]



SWDS4572-2

78 13/16"(2002)
80 5/16"(2040)
76 3/4"(1949)
76"(1930)
33 1/4"(841)[2]



SWDS4576-2

82 13/16"(2103)
84 5/16"(2142)
80 3/4"(2051)
80"(2032)
35 1/4"(895)[2]



SWDS4580-2

90 13/16"(2307)
92 5/16"(2346)
88 3/4"(2254)
88"(2235)
39 1/4"(997)[2]



SWDS4584-2

94 13/16"(2408)
96 5/16"(2446)
92 3/4"(2356)
92"(2337)
41 1/4"(1048)[2]



SWDS4588-2

94 13/16"(2408)
96 5/16"(2446)
92 3/4"(2356)
92"(2337)
41 1/4"(1048)[2]



SWDS4592-2

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E 1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.



3 WIDE SECTOR TOP UNITS

MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	67 5/8"(1718) 70 5/8"(1794) 64 7/8"(1648) 64 1/8"(1629) 14 13/16"(376)[3]	79 5/8"(2022) 82 5/8"(2099) 76 7/8"(1953) 76 1/8"(1934) 18 13/16"(478)[3]	91 5/8"(2327) 94 5/8"(2403) 88 7/8"(2257) 88 1/8"(1492) 22 13/16"(579)[3]	97 5/8"(2481) 100 5/8"(2556) 94 7/8"(2410) 94 1/8"(1594) 24 13/16"(630)[3]	103 5/8"(2632) 106 5/8"(2708) 100 7/8"(2562) 100 1/8"(2543) 26 13/16"(681)[3]	115 5/8"(2937) 118 5/8"(3013) 112 7/8"(2867) 112 1/8"(1899) 30 13/16"(783)[3]
34 13/16"(884) 36 5/16"(922) 32 3/4"(832) 32"(813) 11 1/4"(286)[2]						
38 13/16"(986) 40 5/16"(1024) 36 3/4"(933) 36"(914) 13 1/4"(336)[2]						
42 13/16"(1087) 44 5/16"(1126) 40 3/4"(1035) 40"(1016) 15 1/4"(387)[2]						
46 13/16"(1189) 48 5/16"(1227) 44 3/4"(1137) 44"(1118) 17 1/4"(438)[2]						
50 13/16"(1291) 52 5/16"(1329) 48 3/4"(1239) 48"(1219) 19 1/4"(489)[2]						
54 13/16"(1392) 56 5/16"(1430) 52 3/4"(1340) 52"(1321) 21 1/4"(540)[2]						
58 13/16"(1494) 60 5/16"(1532) 56 3/4"(1441) 56"(1422) 23 1/4"(590)[2]						
62 13/16"(1595) 64 5/16"(1634) 60 3/4"(1543) 60"(1524) 25 1/4"(641)[2]						
66 13/16"(1697) 68 5/16"(1735) 64 3/4"(1645) 64"(1626) 27 1/4"(692)[2]						
70 13/16"(1799) 72 5/16"(1837) 68 3/4"(1746) 68"(1727) 29 1/4"(743)[2]						

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.



3 WIDE SECTOR TOP UNITS

MO BRICKMOLD	67 5/8"(1718)	79 5/8"(2022)	91 5/8"(2327)	97 5/8"(2481)	103 5/8"(2632)	115 5/8"(2937)
MO FLAT CASING	70 5/8"(1794)	82 5/8"(2099)	94 5/8"(2403)	100 5/8"(2556)	106 5/8"(2708)	118 5/8"(3013)
ROUGH OPENING	64 7/8"(1648)	76 7/8"(1953)	88 7/8"(2257)	94 7/8"(2410)	100 7/8"(2562)	112 7/8"(2867)
FRAME SIZE	64 1/8"(1629)	76 1/8"(1934)	88 1/8"(2239)	94 1/8"(2392)	100 1/8"(2544)	112 1/8"(2849)
DAYLIGHT OPENING	14 13/16"(376)[3]	18 13/16"(478)[3]	22 13/16"(579)[3]	24 13/16"(630)[3]	26 13/16"(681)[3]	30 13/16"(783)[3]

74 13/16"(1900) 76 5/16"(1938) 72 3/4"(1848) 72"(1829) 31 1/4"(794)[2]						
78 13/16"(2002) 80 5/16"(2040) 76 3/4"(1949) 76"(1930) 33 1/4"(841)[2]						
82 13/16"(2103) 84 5/16"(2142) 80 3/4"(2051) 80"(2032) 35 1/4"(895)[2]						
90 13/16"(2307) 92 5/16"(2345) 88 3/4"(2254) 88"(2235) 39 1/4"(997)[2]						
94 13/16"(2408) 96 5/16"(2446) 92 3/4"(2356) 92"(2337) 41 1/4"(1048)[2]						

ELEVATION SYMBOL LEGEND:
M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.



3 WIDE SECTOR TOP UNITS

MO BRICKMOLD	127 5/8"(3242)	139 5/8"(3546)
MO FLAT CASING	130 5/8"(3318)	142 5/8"(3623)
ROUGH OPENING	124 7/8"(3172)	136 7/8"(3477)
FRAME SIZE	124 1/8"(3153)	136 1/8"(3458)
DAYLIGHT OPENING	34 13/16"(884)[3]	38 13/16"(986)[3]

34 13/16"(884)		
36 5/16"(922)		
32 3/4"(832)		
32"(813)		
11 1/4"(286)[2]		
38 13/16"(986)		
40 5/16"(1024)		
36 3/4"(933)		
36"(914)		
13 1/4"(336)[2]		
42 13/16"(1087)		
44 5/16"(1126)		
40 3/4"(1035)		
40"(1016)		
15 1/4"(387)[2]		
46 13/16"(1189)		
48 5/16"(1227)		
44 3/4"(1137)		
44"(1118)		
17 1/4"(438)[2]		
50 13/16"(1291)		
52 5/16"(1329)		
48 3/4"(1238)		
48"(1219)		
19 1/4"(489)[2]		
54 13/16"(1392)		
56 5/16"(1430)		
52 3/4"(1340)		
52"(1321)		
21 1/4"(540)[2]		
58 13/16"(1494)		
60 5/16"(1532)		
56 3/4"(1441)		
56"(1422)		
23 1/4"(590)[2]		
62 13/16"(1595)		
64 5/16"(1634)		
60 3/4"(1543)		
60"(1524)		
25 1/4"(641)[2]		
66 13/16"(1697)		
68 5/16"(1735)		
64 3/4"(1645)		
64"(1626)		
27 1/4"(689)[2]		
70 13/16"(1799)		
72 5/16"(1837)		
68 3/4"(1746)		
68"(1727)		
29 1/4"(743)[2]		

ELEVATION SYMBOL LEGEND:


M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.




3 WIDE SECTOR TOP UNITS

MO BRICKMOLD	127 5/8"(3242)	139 5/8"(3546)
MO FLAT CASING	130 5/8"(3318)	142 5/8"(3623)
ROUGH OPENING	124 7/8"(3172)	136 7/8"(3477)
FRAME SIZE	124 1/8"(3153)	136 1/8"(3458)
DAYLIGHT OPENING	34 13/16"(884)[3]	38 13/16"(986)[3]

74 13/16"(1900)
76 5/16"(1938)
72 3/4"(1848)
72 1/2"(1829)
31 1/4"(794)[2]




SWDS4172-3




SWDS4572-3

78 13/16"(2002)
80 5/16"(2040)
76 3/4"(1949)
76 1/8"(1930)
33 1/4"(841)[2]




SWDS4176-3




SWDS4576-3

82 13/16"(2103)
84 5/16"(2142)
80 3/4"(2051)
80 1/2"(2032)
35 1/4"(895)[2]




SWDS4180-3




SWDS4580-3

90 13/16"(2307)
92 5/16"(2345)
88 3/4"(2254)
88 1/2"(2235)
39 1/4"(997)[2]




SWDS4188-3




SWDS4588-3

94 13/16"(2408)
96 5/16"(2446)
92 3/4"(2356)
92 1/2"(2337)
41 1/4"(1048)[2]



SWDS4192-3



SWDS4592-3

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
E I BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT.
E E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.



SINGLE RADIUS UNITS

M.O. BRICKMOULD	24 7/8"(632)	28 7/8"(733)	32 7/8"(835)	34 7/8"(886)	36 7/8"(937)	40 7/8"(1038)	44 7/8"(1140)
M.O. ADAMS/FLAT CASING	27 7/8"(708)	31 7/8"(810)	35 7/8"(911)	37 7/8"(962)	39 7/8"(1013)	43 7/8"(1114)	47 7/8"(1216)
ROUGH OPENING	22 1/8"(562)	26 1/8"(664)	30 1/8"(765)	32 1/8"(816)	34 1/8"(867)	38 1/8"(968)	42 1/8"(1070)
FRAME SIZE	21 3/8"(543)	25 3/8"(645)	29 3/8"(747)	31 3/8"(797)	33 3/8"(848)	37 3/8"(949)	41 3/8"(1051)
DAYLIGHT OPENING	14 13/16"(376)	18 13/16"(478)	22 13/16"(579)	24 13/16"(630)	26 13/16"(681)	30 13/16"(783)	34 13/16"(884)

54 13/16"(1392) 56 5/16"(1430) 52 3/4"(1340) 52"(1321) 21 1/4"(537)[2]							
58 13/16"(1484) 60 5/16"(1532) 56 3/4"(1441) 56"(1422) 23 1/4"(587)[2]							
62 13/16"(1596) 64 5/16"(1634) 60 3/4"(1543) 60"(1524) 25 1/4"(638)[2]							
66 13/16"(1687) 68 5/16"(1735) 64 3/4"(1645) 64"(1626) 27 1/4"(699)[2]							
70 13/16"(1799) 72 5/16"(1837) 68 3/4"(1746) 68"(1727) 29 1/4"(740)[2]							

ELEVATION SYMBOL LEGEND:


VALUES IN () ARE IN MILLIMETER CONVERSIONS
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
 ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING




SINGLE RADIUS UNITS

M.O. BRICKMOUND	24 7/8"(632)	28 7/8"(733)	32 7/8"(835)	34 7/8"(886)	36 7/8"(937)	40 7/8"(1038)	44 7/8"(1140)
M.O. ADAMS/FLAT CASING	27 7/8"(708)	31 7/8"(810)	35 7/8"(911)	37 7/8"(962)	39 7/8"(1013)	43 7/8"(1114)	47 7/8"(1216)
ROUGH OPENING	22 1/8"(562)	26 1/8"(664)	30 1/8"(765)	32 1/8"(816)	34 1/8"(867)	38 1/8"(968)	42 1/8"(1070)
FRAME SIZE	21 3/8"(543)	25 3/8"(645)	29 3/8"(747)	31 3/8"(797)	33 3/8"(848)	37 3/8"(949)	41 3/8"(1051)
DAYLIGHT OPENING	14 13/16"(376)	18 13/16"(478)	22 13/16"(579)	24 13/16"(630)	26 13/16"(681)	30 13/16"(783)	34 13/16"(884)


74 13/16"(1900)
76 5/16"(1938)
72 3/4"(1848)
72"(1829)
31 1/4"(791)|2|

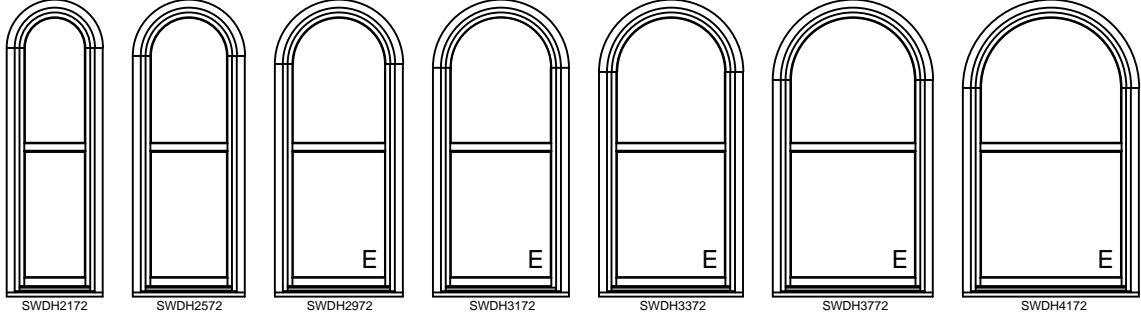


78 13/16"(2002)
80 5/16"(2040)
76 3/4"(1949)
76"(1930)
33 1/4"(841)|2|

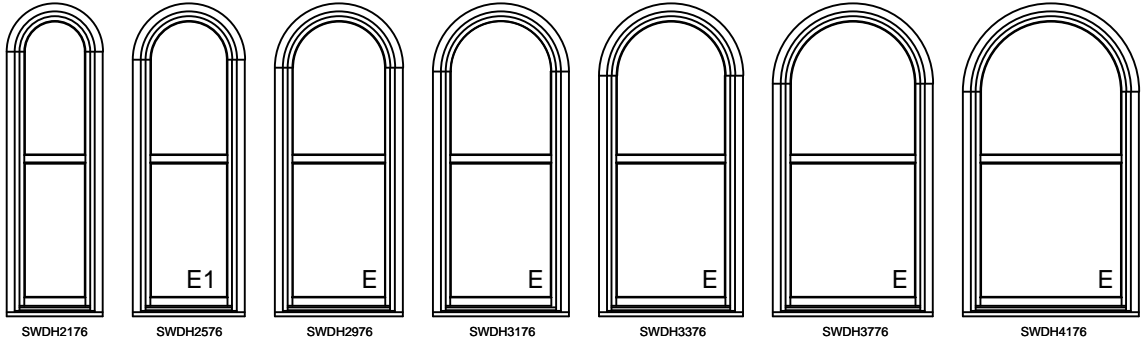

82 13/16"(2103)
84 5/16"(2142)
80 3/4"(2051)
80"(2032)
35 1/4"(892)|2|

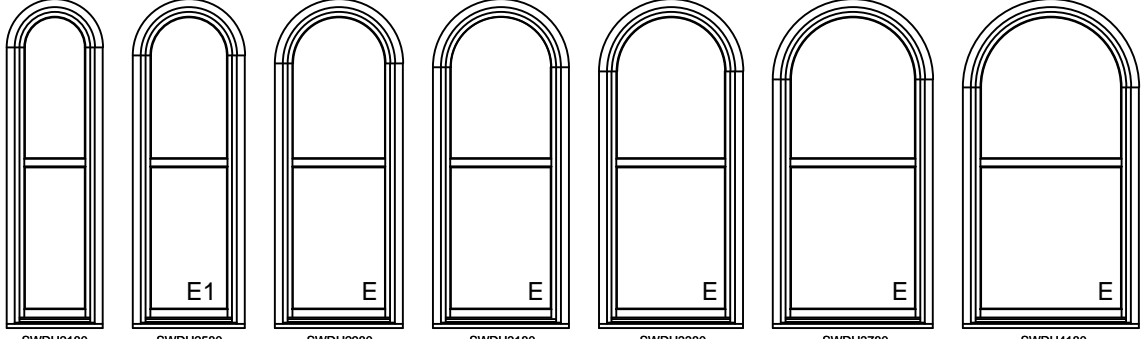

90 13/16"(2307)
92 5/16"(2345)
88 3/4"(2254)
88"(2235)
39 1/4"(994)|2|

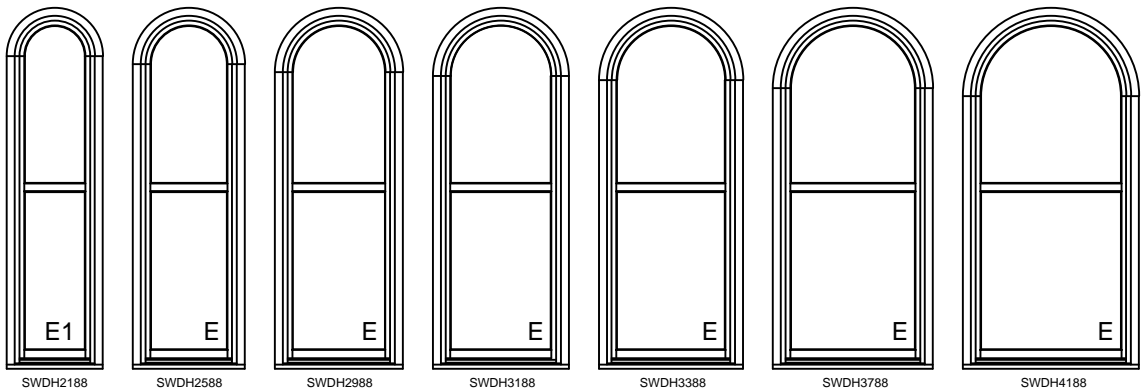


ELEVATION SYMBOL LEGEND:
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
 ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING



SINGLE RADIUS UNITS

M.O. BRICKMOULD	24 7/8"(632)	28 7/8"(733)	32 7/8"(835)	34 7/8"(886)	36 7/8"(937)	40 7/8"(1038)	44 7/8"(1140)
M.O. ADAMS/FLAT CASING	27 7/8"(708)	31 7/8"(810)	35 7/8"(911)	37 7/8"(962)	39 7/8"(1013)	43 7/8"(1114)	47 7/8"(1216)
ROUGH OPENING	22 1/8"(562)	26 1/8"(664)	30 1/8"(765)	32 1/8"(816)	34 1/8"(867)	38 1/8"(968)	42 1/8"(1070)
FRAME SIZE	21 3/8"(543)	25 3/8"(645)	29 3/8"(747)	31 3/8"(797)	33 3/8"(848)	37 3/8"(949)	41 3/8"(1051)
DAYLIGHT OPENING	14 13/16"(376)	18 13/16"(478)	22 13/16"(579)	24 13/16"(630)	26 13/16"(681)	30 13/16"(783)	34 13/16"(884)

94 13/16"(2408)
96 5/16"(2446)
92 3/4"(2365)
92"(2337)
41 1/4"(1045) [2]

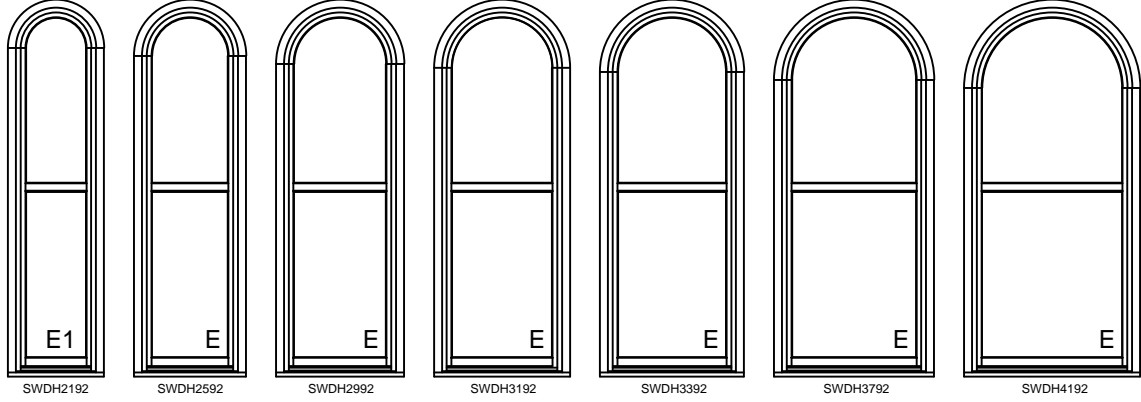

ELEVATION SYMBOL LEGEND:

VALUES IN () ARE IN MILLIMETER CONVERSIONS
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
 ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING



SINGLE RADIUS UNITS

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)


M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)

M.O. BRICKMOULD
M.O. ADAMS/FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


48 7/8"(1241)
51 7/8"(1318)
46 1/8"(1172)
45 3/8"(1153)
38 13/16"(986)

54 13/16"(1392)
56 5/16"(1430)
52 3/4"(1340)
52"(1321)
21 1/4"(537)[2]




SWDH4552

74 13/16"(1900)
76 5/16"(1938)
72 3/4"(1848)
72"(1829)
31 1/4"(791)[2]




SWDH4572

84 13/16"(2408)
86 5/16"(2446)
82 3/4"(2356)
82"(2337)
41 1/4"(1045)[2]

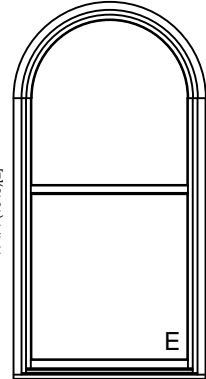


SWDH4592

58 13/16"(1494)
60 5/16"(1532)
56 3/4"(1441)
56"(1422)
23 1/4"(587)[2]




SWDH4556

78 13/16"(2002)
80 5/16"(2040)
76 3/4"(1949)
76"(1930)
33 1/4"(841)[2]




SWDH4576

62 13/16"(1595)
64 5/16"(1634)
60 3/4"(1543)
60"(1524)
25 1/4"(639)[2]




SWDH4560

82 13/16"(2103)
84 5/16"(2142)
80 3/4"(2051)
80"(2032)
35 1/4"(892)[2]




SWDH4580

66 13/16"(1697)
68 5/16"(1735)
64 3/4"(1645)
64"(1626)
27 1/4"(699)[2]




SWDH4564

90 13/16"(2307)
92 5/16"(2345)
88 3/4"(2254)
88"(2235)
39 1/4"(994)[2]

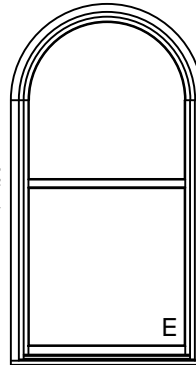

SWDH4588

70 13/16"(1799)
72 5/16"(1837)
68 3/4"(1746)
68"(1727)
29 1/4"(740)[2]



SWDH4568

ELEVATION SYMBOL LEGEND:

VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING