

---

TABLE OF CONTENTS

---

Single Unit . . . . . 10-2

Picture Unit . . . . . 10-10

Twin Unit . . . . . 10-18

Transom Unit . . . . . 10-23

3 Wide Unit . . . . . 10-26

Cottage Single . . . . . 10-30

Cottage Twin . . . . . 10-32

Cottage 3 Wide . . . . . 10-34

Reverse Cottage Single . . . . . 10-36

Reverse Cottage Twin . . . . . 10-38

Reverse Cottage 3 Wide . . . . . 10-40

Radius Top . . . . . 10-42

Radius Top Cottage . . . . . 10-49

Radius Top Reverse Cottage . . . . . 10-51

30 Bay 21 Flanker . . . . . 10-53

30 Bay 25 Flanker . . . . . 10-55

30 Bay 29 Flanker . . . . . 10-57

45 Bay 21 Flanker . . . . . 10-59

45 Bay 25 Flanker . . . . . 10-61

45 Bay 29 Flanker . . . . . 10-63

**ELEVATIONS**  
**SINGLE UNIT**

MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	24 5/8"(625) 27 11/16"(703) 22 1/8"(562) 21 3/8"(543) 15 7/16"(392)	28 5/8"(727) 31 11/16"(805) 26 1/8"(664) 25 3/8"(645) 19 7/16"(494)	32 5/8"(829) 35 11/16"(906) 30 1/8"(765) 29 3/8"(746) 23 7/16"(595)	34 5/8"(879) 37 11/16"(957) 32 1/8"(816) 31 3/8"(797) 25 7/16"(646)	36 5/8"(930) 39 11/16"(1008) 34 1/8"(867) 33 3/8"(848) 27 7/16"(697)	38 5/8"(981) 41 11/16"(1059) 36 1/8"(918) 35 3/8"(899) 29 7/16"(748)	40 5/8"(1032) 43 11/16"(1110) 38 1/8"(968) 37 3/8"(949) 31 7/16"(799)
34 13/32"(874) 35 15/16"(913) 32 3/4"(832) 32"(813) 11 1/8"(283)							
38 13/32"(976) 39 15/16"(1014) 36 3/4"(933) 36"(914) 13 1/8"(333)							
42 13/32"(1077) 43 15/16"(1116) 40 3/4"(1035) 40"(1016) 15 1/8"(384)							
46 13/32"(1179) 47 15/16"(1218) 44 3/4"(1137) 44"(1118) 17 1/8"(435)							
50 13/32"(1280) 51 15/16"(1319) 48 3/4"(1238) 48"(1219) 19 7/8"(486)							
54 13/32"(1382) 55 15/16"(1421) 52 3/4"(1340) 52"(1321) 21 1/8"(537)							

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASONRY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1: BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ### NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**SINGLE UNIT**

MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING

24 5/8"(625)  
27 11/16"(703)  
22 1/8"(562)  
21 3/8"(543)  
15 7/16"(392)

28 5/8"(727)  
31 11/16"(805)  
26 1/8"(664)  
25 3/8"(645)  
19 7/16"(494)

32 5/8"(829)  
35 11/16"(906)  
30 1/8"(765)  
29 3/8"(746)  
23 7/16"(595)








34 5/8"(879)  
37 11/16"(957)  
32 1/8"(816)  
31 3/8"(797)  
25 7/16"(646)

36 5/8"(930)  
39 11/16"(1008)  
34 1/8"(867)  
33 3/8"(848)  
27 7/16"(697)








38 5/8"(981)  
41 11/16"(1059)  
36 1/8"(918)  
35 3/8"(899)  
29 7/16"(748)

40 5/8"(1032)  
43 11/16"(1110)  
38 1/8"(968)  
37 3/8"(949)  
31 7/16"(799)








58 13/32"(1484)  
59 15/16"(1522)  
56 3/4"(1441)  
56"(1422)  
23 1/8"(587)










62 13/32"(1585)  
63 15/16"(1624)  
60 3/4"(1543)  
60"(1524)  
25 1/8"(638)



66 13/32"(1687)  
67 15/16"(1726)  
64 3/4"(1645)  
64"(1626)  
27 1/8"(689)



70 13/32"(1788)  
71 15/16"(1827)  
68 3/4"(1746)  
68"(1727)  
29 1/8"(740)



**ELEVATION SYMBOL LEGEND:**


- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ##\* NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


**ELEVATIONS**  
**SINGLE UNIT**

MO BRICKMOLD	24 5/8"(625)	28 5/8"(727)	32 5/8"(829)	34 5/8"(879)	36 5/8"(930)	38 5/8"(981)	40 5/8"(1032)
MO FLAT CASING	27 11/16"(703)	31 11/16"(805)	35 11/16"(906)	37 11/16"(957)	39 11/16"(1008)	41 11/16"(1059)	43 11/16"(1110)
ROUGH OPENING	22 1/8"(562)	26 1/8"(664)	30 1/8"(765)	32 1/8"(816)	34 1/8"(867)	36 1/8"(918)	38 1/8"(968)
FRAME SIZE	21 3/8"(543)	25 3/8"(645)	29 3/8"(746)	31 3/8"(797)	33 3/8"(848)	35 3/8"(899)	37 3/8"(949)
DAYLIGHT OPENING	15 7/16"(392)	19 7/16"(494)	23 7/16"(595)	25 7/16"(646)	27 7/16"(697)	29 7/16"(748)	31 7/16"(799)


74 13/32"(1890)  
75 15/16"(1929)  
72 3/4"(1848)  
72 1/8"(1828)  
31 1/8"(791)

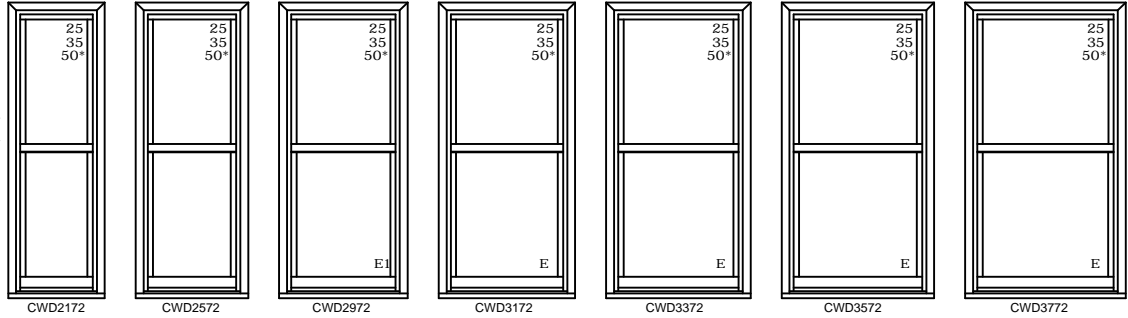


78 13/32"(1994)  
79 15/16"(2030)  
76 3/4"(1949)  
76 1/8"(1930)  
33 1/8"(841)

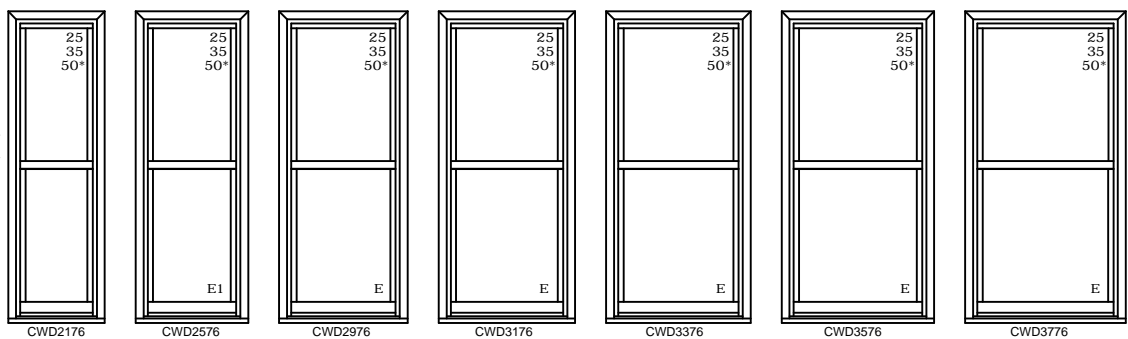

82 13/32"(2093)  
83 15/16"(2132)  
80 3/4"(2051)  
80 1/8"(2032)  
35 1/8"(892)

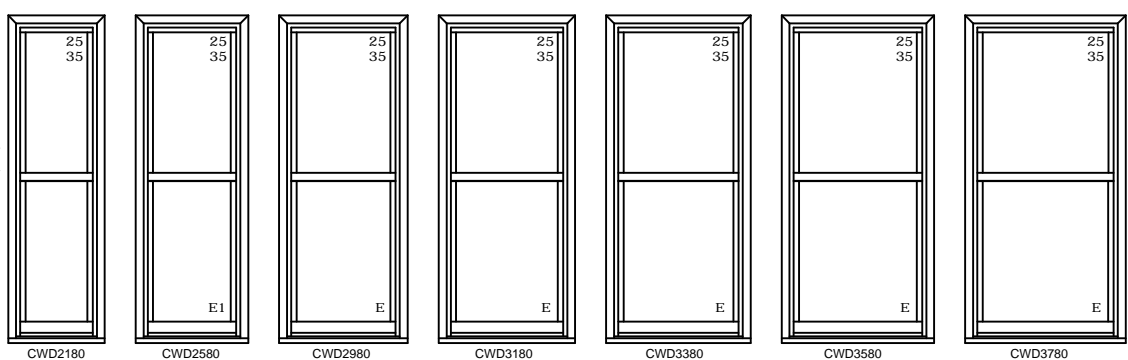

90 13/32"(2296)  
91 15/16"(2335)  
88 3/4"(2254)  
88 1/8"(2235)  
39 1/8"(994)

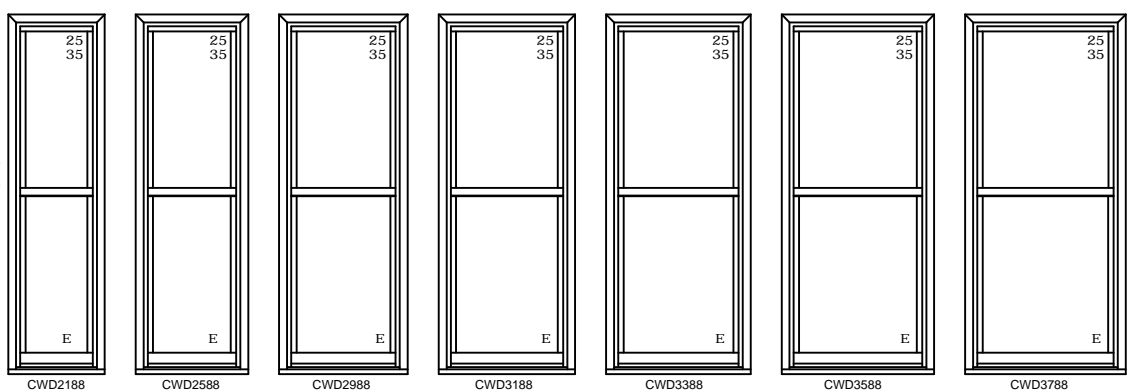


**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS  
E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.  
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.  
T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.  
## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.  
### NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.  
Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**SINGLE UNIT**


MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING

24 5/8"(625)	28 5/8"(727)	32 5/8"(829)	34 5/8"(879)	36 5/8"(930)	38 5/8"(981)	40 5/8"(1032)
27 11/16"(703)	31 11/16"(805)	35 11/16"(906)	37 11/16"(957)	39 11/16"(1008)	41 11/16"(1059)	43 11/16"(1110)
22 1/8"(562)	26 1/8"(664)	30 1/8"(765)	32 1/8"(816)	34 1/8"(867)	36 1/8"(918)	38 1/8"(968)
21 3/8"(543)	25 3/8"(645)	29 3/8"(746)	31 3/8"(797)	33 3/8"(848)	35 3/8"(899)	37 3/8"(949)
15 7/16"(392)	19 7/16"(494)	23 7/16"(595)	25 7/16"(646)	27 7/16"(697)	29 7/16"(748)	31 7/16"(799)


94 13/32"(2398)  
95 15/16"(2437)  
92 3/4"(2356)  
92"(2337)  
41 1/8"(1046)

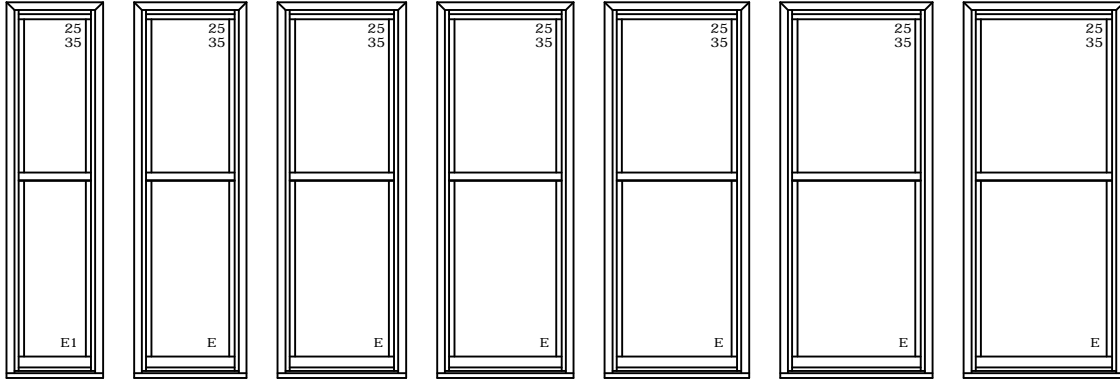

98 13/32"(2500)  
99 15/16"(2538)  
96 3/4"(2457)  
96"(2438)  
43 1/8"(1095)

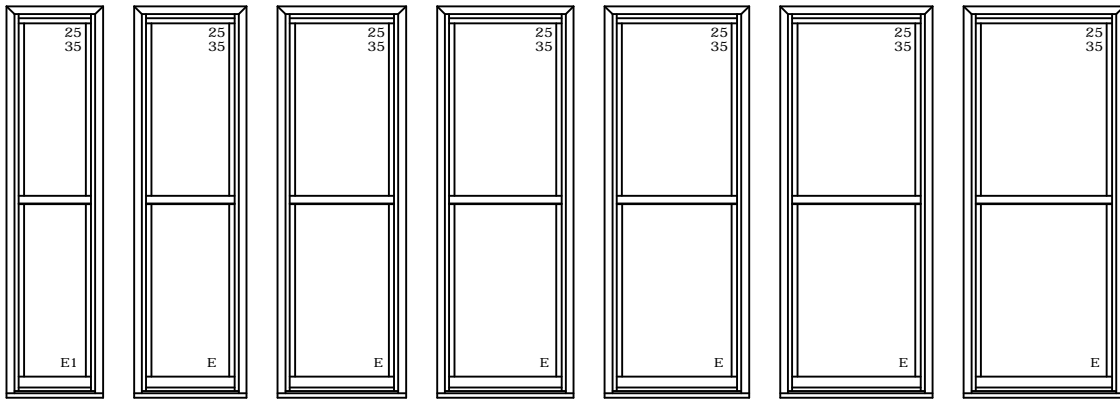

101 13/32"(2576)  
101 15/16"(2589)  
98 3/4"(2508)  
98"(2489)  
44 1/8"(1121)

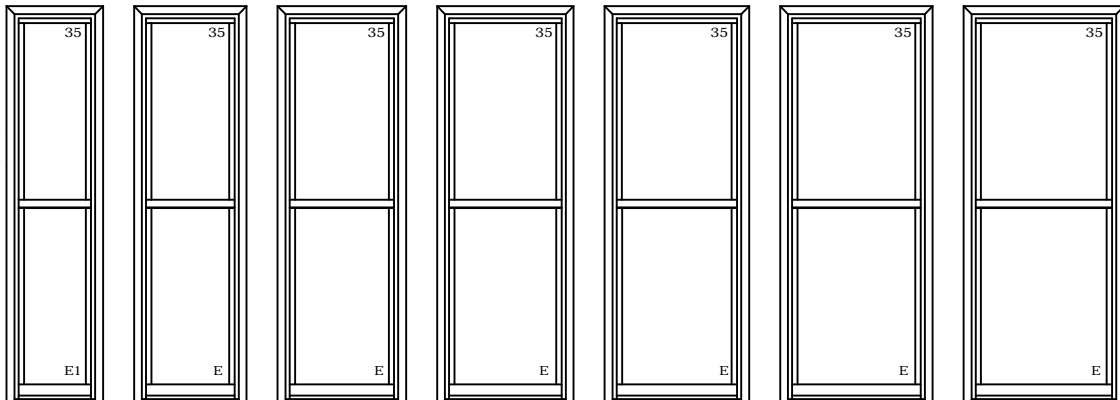

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ### NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**SINGLE UNIT**

MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING

44 5/8"(1133)  
47 11/16"(1211)  
42 1/8"(1070)  
41 3/8"(1051)  
35 7/16"(900)

48 5/8"(1235)  
51 11/16"(1313)  
46 1/8"(1172)  
45 3/8"(1153)  
39 7/16"(1002)

52 5/8"(1337)  
55 11/16"(1414)  
50 1/8"(1273)  
49 3/8"(1254)  
43 7/16"(1103)

34 13/32"(874) 35 15/16"(913) 34 27/8"(882) 11 1/8"(283)			
38 13/32"(976) 39 15/16"(1014) 38 31/8"(983) 13 1/8"(333)			
42 13/32"(1077) 43 15/16"(1116) 40 31/8"(1035) 15 1/8"(384)			
46 13/32"(1179) 47 3/16"(1216) 44 31/8"(1137) 17 1/8"(435)			
50 13/32"(1280) 51 3/16"(1319) 48 31/8"(1236) 19 1/8"(486)			
54 13/32"(1382) 55 15/16"(1421) 52 27/8"(1340) 21 1/8"(537)			

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ##\* NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**SINGLE UNIT**


MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING

44 5/8"(1133)  
47 11/16"(1211)  
42 1/8"(1070)  
41 3/8"(1051)  
35 7/16"(900)


48 5/8"(1235)  
51 11/16"(1313)  
46 1/8"(1172)  
45 3/8"(1153)  
39 7/16"(1002)

52 5/8"(1337)  
55 11/16"(1414)  
50 1/8"(1273)  
49 3/8"(1254)  
43 7/16"(1103)


58 13/32"(1484)  
59 15/16"(1522)  
56 3/4"(1441)  
56"(1422)  
23 1/8"(587)



CWD4156




CWD4556




CWD4956


62 13/32"(1585)  
63 15/16"(1624)  
60 3/4"(1543)  
60"(1524)  
25 1/8"(638)



CWD4160




CWD4560




CWD4960


66 13/32"(1687)  
67 15/16"(1726)  
64 3/4"(1645)  
64"(1626)  
27 1/8"(689)



CWD4164




CWD4564




CWD4964


70 13/32"(1788)  
71 15/16"(1827)  
68 3/4"(1746)  
68"(1727)  
29 1/8"(740)



CWD4168



CWD4568



CWD4968

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASONRY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ### NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**SINGLE UNIT**


MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING

44 5/8"(1133)  
47 11/16"(1211)  
42 1/8"(1070)  
41 3/8"(1051)  
35 7/16"(900)


48 5/8"(1235)  
51 11/16"(1313)  
46 1/8"(1172)  
45 3/8"(1153)  
39 7/16"(1002)

52 5/8"(1337)  
55 11/16"(1414)  
50 1/8"(1273)  
49 3/8"(1254)  
43 7/16"(1103)


74 13/32"(1890)  
75 15/16"(1929)  
72 3/4"(1848)  
72 (1829)  
31 1/8"(791)



CWD4172




CWD4572




CWD4972


78 13/32"(1984)  
79 15/16"(2030)  
76 3/4"(1949)  
76 (1930)  
33 1/8"(841)



CWD4176




CWD4576




CWD4976

82 13/32"(2093)  
83 15/16"(2132)  
80 3/4"(2051)  
80 (2032)  
35 1/8"(892)




CWD4180




CWD4580

80 13/32"(2296)  
81 15/16"(2335)  
80 3/4"(2254)  
80 (2235)  
35 1/8"(894)



CWD4188



CWD4588

**ELEVATION SYMBOL LEGEND:**




- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ### NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.



ELEVATIONS  
SINGLE UNIT

MO BRICKMOLD	44 5/8"(1133)	48 5/8"(1235)
MO FLAT CASING	47 11/16"(1211)	51 11/16"(1313)
ROUGH OPENING	42 1/8"(1070)	46 1/8"(1172)
FRAME SIZE	41 3/8"(1051)	45 3/8"(1153)
DAYLIGHT OPENING	35 7/16"(900)	39 7/16"(1002)

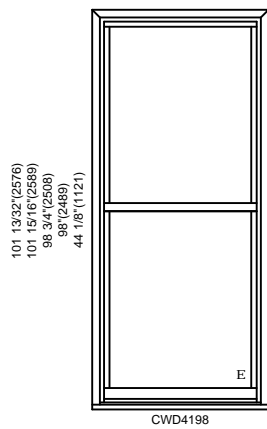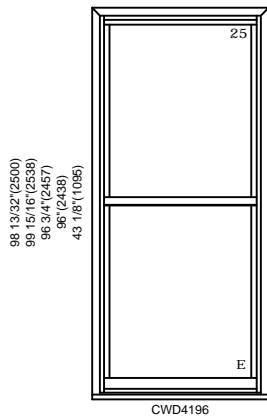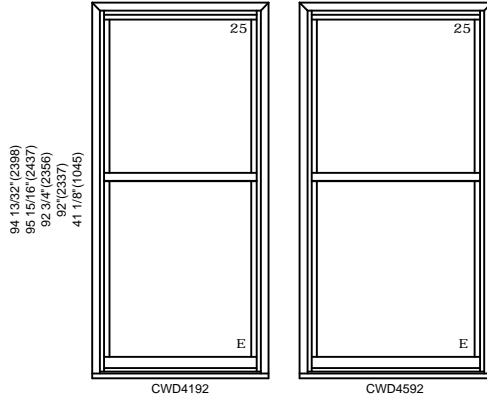

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ##\* NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**PICTURE UNITS**

MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING

44 58\*(1133)  
47 11/16\*(1211)  
42 1/8\*(1070)  
41 3/8\*(1051)  
35 7/16\*(900)

48 58\*(1235)  
51 11/16\*(1313)  
46 1/8\*(1172)  
45 3/8\*(1153)  
39 7/16\*(1002)

52 58\*(1337)  
55 11/16\*(1414)  
50 1/8\*(1273)  
49 3/8\*(1254)  
43 7/16\*(1103)

56 58\*(1438)  
59 11/16\*(1516)  
54 1/8\*(1375)  
53 3/8\*(1356)  
47 7/16\*(1205)

64 58\*(1641)  
67 11/16\*(1719)  
62 1/8\*(1578)  
61 3/8\*(1559)  
55 7/16\*(1408)

42 13/32*(1077) 43 15/16*(1116) 40 3/4*(1035) 40 1/2*(1018) 32 3/8*(822)					
46 13/32*(1179) 47 1/2*(1218) 44 3/4*(1137) 44 1/4*(1118) 36 3/8*(924)					
50 13/32*(1280) 51 13/16*(1319) 48 3/4*(1238) 48*(1219) 40 3/8*(1026)					
54 13/32*(1382) 55 15/16*(1421) 52 3/4*(1340) 52 1/4*(1321) 44 3/8*(1127)					
58 13/32*(1484) 59 15/16*(1522) 56 3/4*(1441) 56 5/8*(1423) 48 3/8*(1229)					
62 13/32*(1586) 63 15/16*(1624) 60 3/4*(1543) 60*(1524) 52 3/8*(1330)					

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ### NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**PICTURE UNITS**

MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING

44 58"(1133)  
47 11/16"(1211)  
42 1/8"(1070)  
41 3/8"(1051)  
35 7/16"(900)


48 58"(1235)  
51 11/16"(1313)  
46 1/8"(1172)  
45 3/8"(1153)  
39 7/16"(1002)

52 58"(1337)  
55 11/16"(1414)  
50 1/8"(1273)  
49 3/8"(1254)  
43 7/16"(1103)


56 58"(1438)  
59 11/16"(1516)  
54 1/8"(1375)  
53 3/8"(1356)  
47 7/16"(1205)

64 58"(1641)  
67 11/16"(1719)  
62 1/8"(1578)  
61 3/8"(1559)  
55 7/16"(1408)


66 13/32"(1687)  
67 15/16"(1726)  
64 3/4"(1645)  
63 1/2"(1623)  
56 3/8"(1432)




CWDP4164




CWDP4564



CWDP4964




CWDP5364




CWDP6164


70 13/32"(1788)  
71 15/16"(1827)  
68 3/4"(1746)  
68 1/2"(1723)  
60 3/8"(1534)




CWDP4168




CWDP4568



CWDP4968




CWDP5368




CWDP6168


74 13/32"(1890)  
75 15/16"(1929)  
72 3/4"(1848)  
72 1/2"(1825)  
64 3/8"(1635)




CWDP4172




CWDP4572



CWDP4972



CWDP5372



CWDP6172

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ### NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**PICTURE UNITS**

MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING

44 58\*(1133)  
47 11/16\*(1211)  
42 1/8\*(1070)  
41 3/8\*(1051)  
35 7/16\*(900)


48 58\*(1235)  
51 11/16\*(1313)  
46 1/8\*(1172)  
45 3/8\*(1153)  
39 7/16\*(1002)

52 58\*(1337)  
55 11/16\*(1414)  
50 1/8\*(1273)  
49 3/8\*(1254)  
43 7/16\*(1103)


56 58\*(1438)  
59 11/16\*(1516)  
54 1/8\*(1375)  
53 3/8\*(1356)  
47 7/16\*(1205)

64 58\*(1641)  
67 11/16\*(1719)  
62 1/8\*(1578)  
61 3/8\*(1559)  
55 7/16\*(1408)


78 13/32\*(1984)  
79 15/16\*(2030)  
76 3/4\*(1849)  
76\*(1830)  
66 3/8\*(1737)




CWDP4176




CWDP4576



CWDP4976




CWDP5376




CWDP6176


82 13/32\*(2083)  
83 15/16\*(2132)  
80 3/4\*(2051)  
80\*(2032)  
72 11/16\*(1838)




CWDP4180




CWDP4580



CWDP4980




CWDP5380




CWDP6180


80 13/32\*(2286)  
81 15/16\*(2335)  
86 3/4\*(2254)  
86\*(2235)  
80 3/8\*(2042)




CWDP4188




CWDP4588



CWDP4988

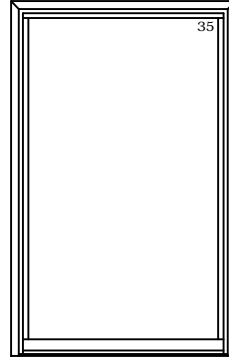

CWDP5388

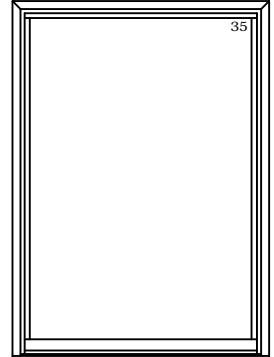

CWDP6188

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ##\* NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**PICTURE UNITS**

MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING

44 58\*(1133)  
47 11/16\*(1211)  
42 1/8\*(1070)  
41 3/8\*(1051)  
35 7/16\*(900)


48 58\*(1235)  
51 11/16\*(1313)  
46 1/8\*(1172)  
45 3/8\*(1153)  
39 7/16\*(1002)

52 58\*(1337)  
55 11/16\*(1414)  
50 1/8\*(1273)  
49 3/8\*(1254)  
43 7/16\*(1103)


56 58\*(1438)  
59 11/16\*(1516)  
54 1/8\*(1375)  
53 3/8\*(1356)  
47 7/16\*(1205)

64 58\*(1641)  
67 11/16\*(1719)  
62 1/8\*(1578)  
61 3/8\*(1559)  
55 7/16\*(1408)


94 13/32\*(2388)  
95 15/16\*(2437)  
92 3/4\*(2366)  
92\*(2337)  
84 3/8\*(2143)




CWDP4192

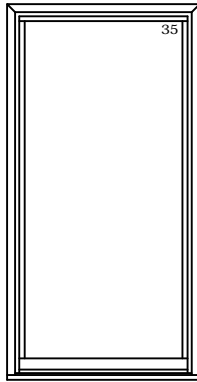


CWDP4592

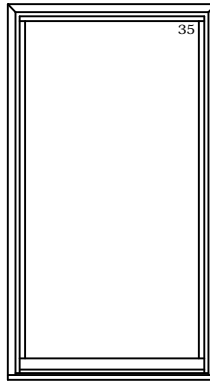

CWDP4992

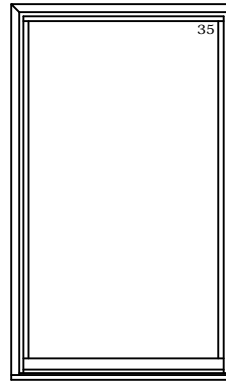


CWDP5392

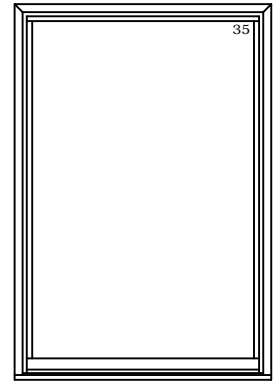


CWDP6192


98 13/32\*(2500)  
99 15/16\*(2538)  
96 3/4\*(2457)  
96\*(2438)  
88 3/8\*(2245)

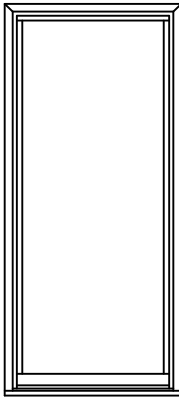


CWDP4196

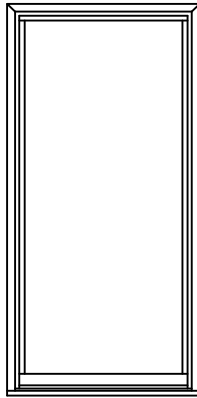


CWDP4596

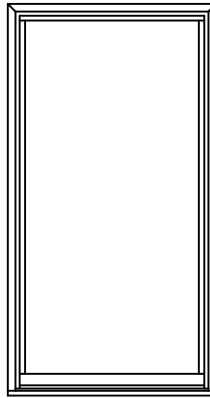

CWDP4996

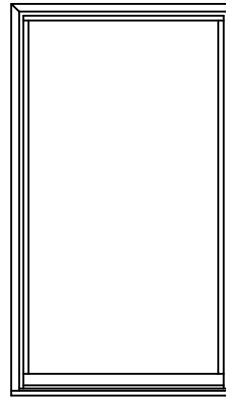

CWDP5396

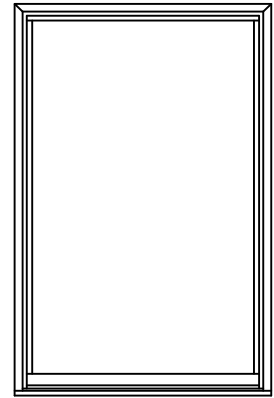

CWDP6196

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ##\* NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


**ELEVATIONS**  
**PICTURE UNITS**

MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING


72 5/8"(1845)  
75 11/16"(1922)  
70 1/8"(1781)  
69 3/8"(1762)  
63 7/16"(1611)

80 5/8"(2048)  
83 11/16"(2126)  
78 1/8"(1984)  
77 3/8"(1965)  
71 7/16"(1815)

42 13/32"(1077)  
43 15/16"(1116)  
40 3/4"(1035)  
40"(1016)  
32 3/8"(822)




CWDP6940




CWDP7740

46 13/32"(1179)  
47 15/16"(1218)  
44 3/4"(1137)  
44"(1118)  
36 3/8"(924)




CWDP6944




CWDP7744

50 13/32"(1280)  
51 15/16"(1319)  
48 3/4"(1238)  
48"(1219)  
40 3/8"(1026)




CWDP6948




CWDP7748

54 13/32"(1382)  
55 15/16"(1421)  
52 3/4"(1340)  
52"(1321)  
44 3/8"(1127)




CWDP6952




CWDP7752

58 13/32"(1484)  
59 15/16"(1522)  
56 3/4"(1441)  
56"(1422)  
48 3/8"(1229)




CWDP6956




CWDP7756

62 13/32"(1585)  
63 15/16"(1624)  
60 3/4"(1543)  
60"(1524)  
52 3/8"(1330)



CWDP6960



CWDP7760

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- T BASIC UNIT IS NOT AVAILALE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ##\* NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


**ELEVATIONS**  
**PICTURE UNITS**

MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING


72 5/8"(1845)  
75 11/16"(1922)  
70 1/8"(1781)  
69 3/8"(1762)  
63 7/16"(1611)

80 5/8"(2048)  
83 11/16"(2126)  
78 1/8"(1984)  
77 3/8"(1965)  
71 7/16"(1815)

66 13/32"(1687)  
67 15/16"(1726)  
64 3/4"(1645)  
64"(1626)  
56 3/8"(1432)




CWDP6964




CWDP7764

70 13/32"(1788)  
71 15/16"(1827)  
68 3/4"(1746)  
68"(1727)  
60 3/8"(1534)




CWDP6968




CWDP7768

74 13/32"(1890)  
75 15/16"(1929)  
72 3/4"(1848)  
72"(1829)  
64 3/8"(1635)



CWDP6972



CWDP7772

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ##\* NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


**ELEVATIONS**  
**PICTURE UNITS**

MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING


72 58"(1845)  
75 11/16"(1922)  
70 1/8"(1781)  
69 3/8"(1762)  
63 7/16"(1611)

80 58"(2048)  
83 11/16"(2126)  
78 1/8"(1984)  
77 3/8"(1965)  
71 7/16"(1815)

78 13/32"(1994)  
79 15/16"(2030)  
76 3/4"(1949)  
76"(1930)  
68 3/8"(1737)




CWDP6976




CWDP7776

82 13/32"(2093)  
83 15/16"(2132)  
80 3/4"(2051)  
80"(2032)  
72 11/16"(1838)




CWDP6980




CWDP7780

80 13/32"(2296)  
91 15/16"(2335)  
88 3/4"(2254)  
88"(2235)  
80 3/8"(2042)

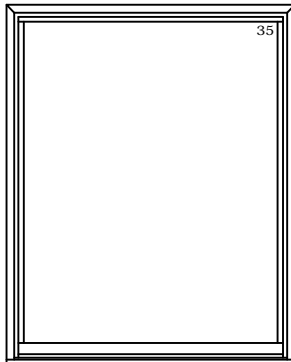

CWDP6988



CWDP7788

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- T\* BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ##\* NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.




**ELEVATIONS**  
**PICTURE UNITS**


MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING

72 58"(1845)  
75 11/16"(1922)  
70 1/8"(1781)  
69 3/8"(1762)  
63 7/16"(1611)


80 58"(2048)  
83 11/16"(2126)  
78 1/8"(1984)  
77 3/8"(1965)  
71 7/16"(1815)

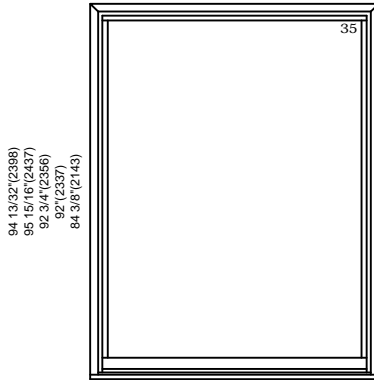

CWDP6992



CWDP7792

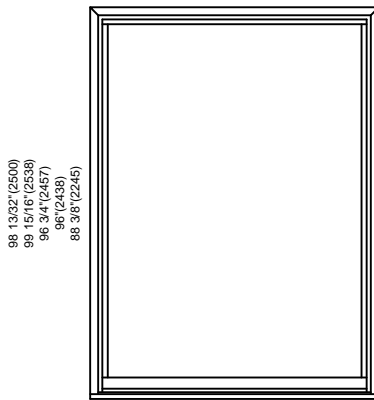

CWDP6996

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ##\* NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**TWIN UNITS**

	46" (1168)	54" (1372)	62" (1575)	66" (1676)	70" (1778)	74" (1880)	78" (1981)
MO BRICKMOLD	49 1/16" (1246)	57 1/16" (1449)	64 1/16" (1627)	68 1/16" (1729)	72 1/16" (1830)	76 1/16" (1932)	80 1/16" (2034)
MO FLAT CASING	43 1/2" (1105)	51 1/2" (1308)	59 1/2" (1511)	63 1/2" (1613)	67 1/2" (1715)	71 1/2" (1816)	75 1/2" (1918)
ROUGH OPENING	42 3/4" (1086)	50 3/4" (1289)	58 3/4" (1492)	62 3/4" (1594)	66 3/4" (1695)	70 3/4" (1797)	74 3/4" (1899)
FRAME SIZE							
DAYLIGHT OPENING	15 7/16" [2] (392) [2]	19 7/16" [2] (494) [2]	23 7/16" [2] (595) [2]	25 7/16" [2] (646) [2]	27 7/16" [2] (697) [2]	29 7/16" [2] (748) [2]	31 7/16" [2] (799) [2]

34 13/32" (874) 35 15/16" (913) 33 3/4" (832) 33 3/27" (813) 11 1/8" (283)							
38 13/32" (976) 39 15/16" (1014) 38 3/4" (933) 36 9/14" (914) 13 1/8" (333)							
42 13/32" (1077) 43 15/16" (1115) 40 3/4" (1035) 40 1/10" (1016) 15 1/8" (384)							
46 13/32" (1178) 47 15/16" (1216) 44 3/4" (1137) 44 1/11" (1118) 17 1/8" (435)							
50 13/32" (1280) 51 15/16" (1318) 48 3/4" (1238) 48 1/12" (1219) 19 1/8" (486)							
54 13/32" (1382) 55 15/16" (1421) 52 3/4" (1340) 52 1/12" (1321) 21 1/8" (537)							
58 13/32" (1484) 59 15/16" (1522) 56 3/4" (1441) 56 1/12" (1422) 23 1/8" (587)							
62 13/32" (1585) 63 15/16" (1624) 60 3/4" (1543) 60 1/12" (1524) 25 1/8" (638)							
66 13/32" (1687) 67 15/16" (1726) 64 3/4" (1645) 64 1/12" (1626) 27 1/8" (689)							

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- VALUES IN [ ] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ### NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" (12.7) from M.O. (Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**TWIN UNITS**

MO BRICKMOLD	46"(1168)	54"(1372)	62"(1575)	66"(1676)	70"(1778)	74"(1880)	78"(1981)
MO FLAT CASING	49 1/16"(1246)	57 1/16"(1449)	64 1/16"(1627)	68 1/16"(1729)	72 1/16"(1830)	76 1/16"(1932)	80 1/16"(2034)
ROUGH OPENING	43 1/2"(1105)	51 1/2"(1308)	59 1/2"(1511)	63 1/2"(1613)	67 1/2"(1715)	71 1/2"(1816)	75 1/2"(1918)
FRAME SIZE	42 3/4"(1086)	50 3/4"(1289)	58 3/4"(1492)	62 3/4"(1594)	66 3/4"(1695)	70 3/4"(1797)	74 3/4"(1899)
DAYLIGHT OPENING	15 7/16"[2](392)[2]	19 7/16"[2](494)[2]	23 7/16"[2](595)[2]	25 7/16"[2](646)[2]	27 7/16"[2](697)[2]	29 7/16"[2](748)[2]	31 7/16"[2](799)[2]

70 13/32"(1788) 71 15/16"(1827) 68 3/4"(1746) 66"(1727) 29 1/8"(740)							
74 13/32"(1890) 75 15/16"(1929) 72 3/4"(1848) 72"(1829) 31 1/8"(791)							
78 13/32"(1994) 79 15/16"(2033) 76 3/4"(1949) 76"(1930) 33 1/8"(841)							
82 13/32"(2093) 83 15/16"(2132) 80 3/4"(2051) 80"(2032) 35 1/8"(892)							
90 13/32"(2296) 91 15/16"(2335) 88 3/4"(2254) 88"(2235) 39 1/8"(994)							


**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- VALUES IN [ ] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ##\* NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**TWIN UNITS**

MO BRICKMOLD	46"(1168)	54"(1372)	62"(1575)	66"(1676)	70"(1778)	74"(1880)	78"(1981)
MO FLAT CASING	49 1/16"(1246)	57 1/16"(1449)	64 1/16"(1627)	68 1/16"(1729)	72 1/16"(1830)	76 1/16"(1932)	80 1/16"(2034)
ROUGH OPENING	43 1/2"(1105)	51 1/2"(1308)	59 1/2"(1511)	63 1/2"(1613)	67 1/2"(1715)	71 1/2"(1816)	75 1/2"(1918)
FRAME SIZE	42 3/4"(1086)	50 3/4"(1289)	58 3/4"(1492)	62 3/4"(1594)	66 3/4"(1695)	70 3/4"(1797)	74 3/4"(1899)
DAYLIGHT OPENING	15 7/16"2 (392) 2]	19 7/16"2 (494) 2]	23 7/16"2 (595) 2]	25 7/16"2 (646) 2]	27 7/16"2 (697) 2]	29 7/16"2 (748) 2]	31 7/16"2 (799) 2]

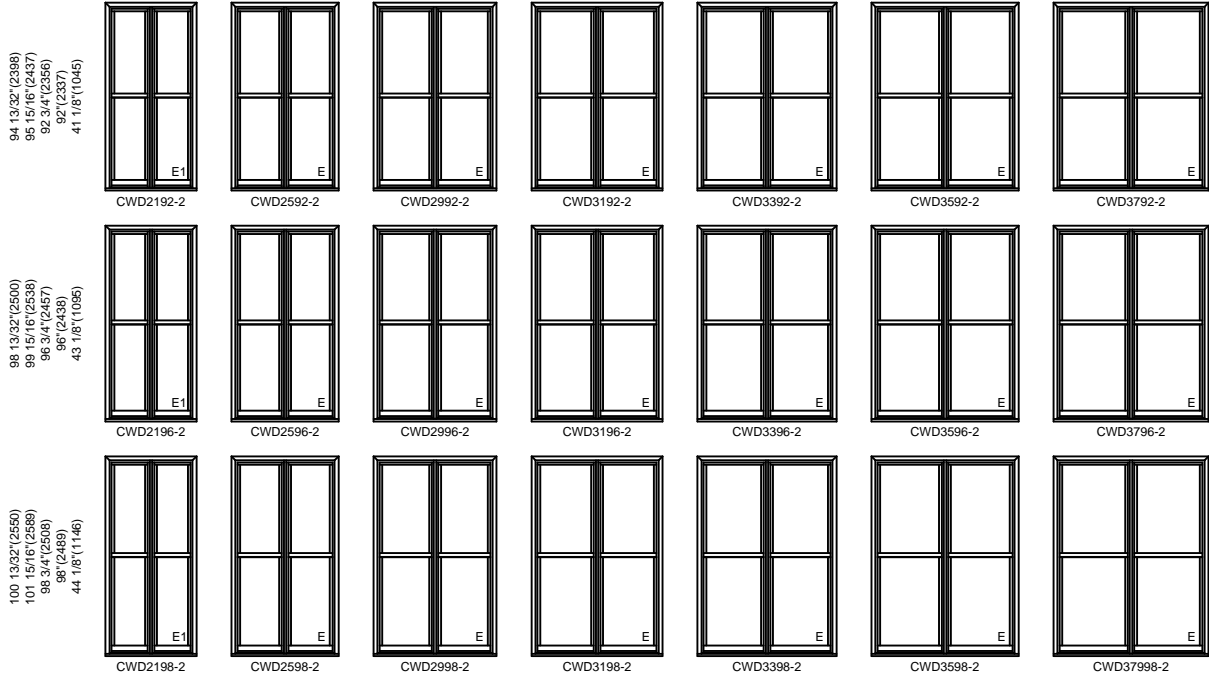

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASONRY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- VALUES IN [ ] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ### NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**TWIN UNITS**

MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	86"(2184) 88 1/16"(2237) 83 1/2"(2121) 82 3/4"(2102) 35 7/16"[2](900)[2]	94"(2388) 96 1/16"(2440) 91 1/2"(2324) 90 3/4"(2305) 39 7/16"[2](1002)[2]	102"(2591) 104 1/16"(2643) 99 1/2"(2527) 98 3/4"(2508) 43 7/16"[2](1103)[2]
34 13/32"(874) 35 15/16"(913) 33 3/4"(832) 32*(813) 11 1/8"(283)			
38 13/32"(976) 39 15/16"(1014) 38 3/4"(933) 36*(914) 13 1/8"(333)			
42 13/32"(1077) 43 15/16"(1116) 40 3/4"(1035) 40*(1016) 15 1/8"(384)			
46 13/32"(1178) 47 15/16"(1216) 44 3/4"(1137) 44*(1118) 17 1/8"(435)			
50 13/32"(1280) 51 15/16"(1318) 48 3/4"(1238) 48*(1219) 19 1/8"(486)			
54 13/32"(1382) 55 15/16"(1421) 52 3/4"(1340) 52*(1321) 21 1/8"(537)			
58 13/32"(1484) 59 15/16"(1522) 56 3/4"(1441) 56*(1422) 23 1/8"(587)			
62 13/32"(1585) 63 15/16"(1624) 60 3/4"(1543) 60*(1524) 25 1/8"(638)			
66 13/32"(1687) 67 15/16"(1726) 64 3/4"(1645) 64*(1626) 27 1/8"(689)			
70 13/32"(1788) 71 15/16"(1827) 68 3/4"(1746) 68*(1727) 29 1/8"(740)			

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASONRY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- VALUES IN [ ] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ### NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**TWIN UNITS**


MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING

86\*(2184)  
88 1/16\*(2237)  
83 1/2\*(2121)  
82 3/4\*(2102)  
35 7/16\*[2](900)[2]


94\*(2388)  
96 1/16\*(2440)  
91 1/2\*(2324)  
90 3/4\*(2305)  
39 7/16\*[2](1002)[2]

102\*(2591)  
104 1/16\*(2643)  
99 1/2\*(2527)  
98 3/4\*(2508)  
43 7/16\*[2](1103)[2]


74 13/32\*(1890)  
75 15/16\*(1929)  
72 3/4\*(1848)  
72\*(1829)  
31 1/8\*(791)



CWD4172-2




CWD4572-2




CWD4972-2


76 13/32\*(1984)  
79 15/16\*(2030)  
76 3/4\*(1949)  
76\*(1930)  
33 1/8\*(841)



CWD4176-2




CWD4576-2




CWD4976-2


82 13/32\*(2093)  
83 15/16\*(2132)  
80 3/4\*(2051)  
80\*(2032)  
35 1/8\*(892)



CWD4180-2




CWD4580-2




CWD4980-2

90 13/32\*(2296)  
91 15/16\*(2335)  
88 3/4\*(2254)  
88\*(2235)  
39 7/8\*(994)




CWD4188-2




CWD4588-2

94 13/32\*(2388)  
95 15/16\*(2437)  
92 3/4\*(2356)  
92\*(2337)  
41 1/8\*(1045)




CWD4192-2



CWD4592-2

98 13/32\*(2500)  
99 15/16\*(2538)  
96 3/4\*(2457)  
96\*(2438)  
43 7/8\*(1095)



CWD4196-2

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- VALUES IN [ ] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ##\* NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**TRANSOM UNITS**

MO BRICKMOLD	24 5/8"(625)	28 5/8"(727)	32 5/8"(829)	34 5/8"(879)	36 5/8"(930)	38 5/8"(981)	40 5/8"(1032)
MO FLAT CASING	27 11/16"(703)	31 11/16"(805)	35 11/16"(906)	37 11/16"(957)	39 11/16"(1008)	41 11/16"(1059)	43 11/16"(1110)
ROUGH OPENING	22 1/8"(562)	26 1/8"(664)	30 1/8"(765)	32 1/8"(816)	34 1/8"(867)	36 1/8"(918)	38 1/8"(968)
FRAME SIZE	21 3/8"(543)	25 3/8"(645)	29 3/8"(746)	31 3/8"(797)	33 3/8"(848)	35 3/8"(899)	37 3/8"(949)
DAYLIGHT OPENING	15 7/16"(392)	19 7/16"(494)	23 7/16"(595)	25 7/16"(646)	27 7/16"(697)	29 7/16"(748)	31 7/16"(798)
14 13/32"(388) 15 15/16"(408) 12 3/4"(324) 12 1/2"(305) 5 5/8"(144)							
16 13/32"(417) 17 15/16"(436) 14 3/4"(375) 14 1/2"(356) 7 5/8"(194)							
18 13/32"(468) 19 15/16"(486) 16 3/4"(425) 16 1/2"(406) 9 5/8"(244)							
20 13/32"(518) 21 15/16"(537) 18 3/4"(476) 18 1/2"(457) 11 5/8"(295)							
22 13/32"(569) 23 15/16"(588) 20 3/4"(527) 20 1/2"(508) 13 5/8"(346)							
26 13/32"(671) 27 15/16"(690) 24 3/4"(629) 24 1/2"(610) 17 5/8"(448)							
32 13/32"(823) 33 15/16"(842) 30 3/4"(781) 30 1/2"(762) 23 5/8"(600)							
38 13/32"(976) 39 15/16"(994) 36 3/4"(833) 36 1/4"(814) 29 5/8"(752)							
44 13/32"(1128) 45 15/16"(1147) 42 3/4"(1086) 42 1/2"(1067) 35 5/8"(905)							
50 13/32"(1280) 51 15/16"(1299) 48 3/4"(1238) 48 1/2"(1219) 41 5/8"(1057)							

**ELEVATION SYMBOL LEGEND:**

M.O. = MASORNY OPENING  
 VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS  
 ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.  
 ### NUMBER INDICATES HIGHER DP RATING WITH IMPACT GLAZING.  
 Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**TRANSOM UNITS**

▷ BRICKMOLD  
▷ FLAT CASING  
UHG OPENING  
FRAME SIZE  
LIGHT OPENING

44 5/8"(113)  
47 11/16"(1211)  
42 1/8"(1070)  
41 3/8"(1051)  
35 7/16"(900)

48 5/8"(1235)  
51 11/16"(1313)  
46 1/8"(1172)  
45 3/8"(1153)  
39 7/16"(1002)

52 5/8"(1337)  
55 11/16"(1414)  
50 1/8"(1273)  
49 3/8"(1254)  
43 7/16"(1103)

56 5/8"(1438)  
59 11/16"(1516)  
54 1/8"(1375)  
53 3/8"(1356)  
47 7/16"(1205)

64 5/8"(1641)  
67 11/16"(1719)  
62 1/8"(1578)  
61 3/8"(1559)  
55 7/16"(1408)

14 13/32"(368)  
17 15/16"(405)  
12 3/4"(324)  
12\*(305)  
5 5/8"(143)



CWDT4112



CWDT4512



CWDT4912



CWDT5312



CWDT6112

16 13/32"(417)  
17 15/16"(456)  
14 3/4"(375)  
14\*(356)  
7 5/8"(194)



CWDT4114



CWDT4514



CWDT4914



CWDT5314



CWDT6114

18 13/32"(468)  
19 15/16"(506)  
16 3/4"(425)  
16\*(406)  
9 5/8"(244)



CWDT4116



CWDT4516



CWDT4916



CWDT5316



CWDT6116

20 13/32"(518)  
21 15/16"(557)  
18 3/4"(476)  
18\*(457)  
11 5/8"(295)



CWDT4118



CWDT4518



CWDT4918



CWDT5318



CWDT6118

22 13/32"(569)  
23 15/16"(608)  
20 3/4"(527)  
20\*(508)  
13 5/8"(346)



CWDT4120



CWDT4520



CWDT4920



CWDT5320



CWDT6120

26 13/32"(671)  
27 15/16"(710)  
24 3/4"(629)  
24\*(610)  
17 5/8"(448)



CWDT4124



CWDT4524



CWDT4924



CWDT5324



CWDT6124

32 13/32"(823)  
33 15/16"(862)  
30 3/4"(781)  
30\*(762)  
23 5/8"(600)



CWDT4130



CWDT4530



CWDT4930




CWDT5330




CWDT6130


38 13/32"(976)  
39 15/16"(1014)  
36 3/4"(933)  
36\*(914)  
29 5/8"(752)




CWDT4136




CWDT4536



CWDT4936




CWDT5336




CWDT6136


44 13/32"(1128)  
45 15/16"(1167)  
42 3/4"(1086)  
42\*(1067)  
35 5/8"(905)




CWDT4142




CWDT4542



CWDT4942



CWDT5342



CWDT6142

50 13/32"(1280)  
51 15/16"(1319)  
48 3/4"(1238)  
48\*(1219)  
41 5/8"(1057)



CWDT4148



CWDT4548



CWDT4948



CWDT5348



CWDT6148

**ELEVATION SYMBOL LEGEND:**

M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS  
## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.  
### NUMBER INDICATES HIGHER DP RATING WITH IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.



**ELEVATIONS**  
**TRANSOM UNITS**

MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING


72 5/8"(1845)  
75 11/16"(1922)  
70 1/8"(1781)  
69 3/8"(1762)  
63 7/16"(1611)

80 5/8"(2048)  
83 11/16"(2126)  
78 1/8"(1984)  
77 3/8"(1965)  
71 7/16"(1814)

14 13/32"(366)  
15 15/16"(406)  
12 3/4"(324)  
12"(305)  
5 5/8"(143)



CWDT6912



CWDT7712

16 13/32"(417)  
17 15/16"(456)  
14 3/4"(375)  
14"(356)  
7 5/8"(194)




CWDT6914




CWDT7714

18 13/32"(488)  
19 15/16"(506)  
16 3/4"(425)  
16"(406)  
9 5/8"(244)



CWDT6916



CWDT7716

20 13/32"(518)  
21 15/16"(557)  
18 3/4"(476)  
18"(457)  
11 5/8"(295)



CWDT6918



CWDT7716

22 13/32"(569)  
23 15/16"(608)  
20 3/4"(527)  
20"(508)  
13 5/8"(346)



CWDT6920



CWDT7720

26 13/32"(671)  
27 15/16"(710)  
24 3/4"(629)  
24"(610)  
17 5/8"(448)



CWDT6924



CWDT7724

32 13/32"(823)  
33 15/16"(862)  
30 3/4"(781)  
30"(762)  
23 5/8"(600)



CWDT6930



CWDT7730

38 13/32"(976)  
39 15/16"(1014)  
36 3/4"(933)  
36"(914)  
29 5/8"(752)



CWDT6936



CWDT7736

44 13/32"(1128)  
45 15/16"(1167)  
42 3/4"(1088)  
42"(1067)  
35 5/8"(905)



CWDT6942



CWDT7742

50 13/32"(1280)  
51 15/16"(1319)  
48 3/4"(1238)  
48"(1219)  
41 5/8"(1057)



CWDT6948



CWDT7748

**ELEVATION SYMBOL LEGEND:**

M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS  
## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING.  
### NUMBER INDICATES HIGHER DP RATING WITH IMPACT GLAZING.  
Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**3 WIDE UNITS**

MO BRICKMOLD	67 3/8"(1711)	79 3/8"(2016)	91 3/8"(2321)	97 3/8"(2473)	103 3/8"(2626)
MO FLAT CASING	70 7/16"(1789)	82 7/16"(2094)	94 7/16"(2399)	100 7/16"(2551)	106 7/16"(2704)
ROUGH OPENING	64 7/8"(1648)	76 7/8"(1946)	88 7/8"(2257)	94 7/8"(2410)	100 7/8"(2556)
FRAME SIZE	64 1/8"(1629)	76 1/8"(1934)	88 1/8"(2238)	94 1/8"(2391)	100 1/8"(2543)
DAYLIGHT OPENING	15 7/16*[3](392)[3]	19 7/16*[3](494)[3]	23 7/16*[3](595)[3]	25 7/16*[3](646)[3]	27 7/16*[3](697)[3]
34 13/32*(874) 35 15/16*(913) 32 3/4*(832) 32 3/2*(813) 11 1/8*(283)					
38 13/32*(976) 39 15/16*(1014) 36 3/4*(933) 36 3/4*(914) 13 1/8*(333)					
42 13/32*(1077) 43 15/16*(1115) 40 3/4*(1035) 40 3/4*(1016) 15 1/8*(384)					
46 13/32*(1179) 47 15/16*(1218) 44 3/4*(1137) 44 1/2*(1118) 17 1/8*(435)					
50 13/32*(1280) 51 15/16*(1319) 48 3/4*(1238) 48 1/2*(1219) 19 1/8*(486)					
54 13/32*(1382) 55 15/16*(1421) 52 3/4*(1340) 52 1/2*(1321) 21 1/8*(537)					
58 13/32*(1484) 59 15/16*(1522) 56 3/4*(1441) 56 1/2*(1422) 23 1/8*(587)					
62 13/32*(1585) 63 15/16*(1624) 60 3/4*(1543) 60 1/2*(1524) 25 1/8*(638)					
66 13/32*(1687) 67 15/16*(1726) 64 3/4*(1645) 64 1/2*(1626) 27 1/8*(689)					
70 13/32*(1788) 71 15/16*(1827) 68 3/4*(1746) 68 1/2*(1727) 29 1/8*(740)					

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- VALUES IN [ ] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ### NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" (12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**3 WIDE UNITS**

MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING

67 3/8"(1711)  
70 7/16"(1789)  
64 7/8"(1648)  
64 1/8"(1629)  
15 7/16"[3](392)[3]

79 3/8"(2016)  
82 7/16"(2094)  
76 7/8"(1946)  
76 1/8"(1934)  
19 7/16"[3](494)[3]

91 3/8"(2321)  
94 7/16"(2399)  
88 7/8"(2257)  
88 1/8"(2238)  
23 7/16"[3](695)[3]


97 3/8"(2473)  
100 7/16"(2551)  
94 7/8"(2410)  
94 1/8"(2391)  
25 7/16"[3](646)[3]

103 3/8"(2626)  
106 7/16"(2704)  
100 7/8"(2556)  
100 1/8"(2543)  
27 7/16"[3](697)[3]


74 13/32"(1890)  
75 15/16"(1929)  
72 3/4"(1848)  
72"(1829)  
31 1/8"(791)




CWD2172-3




CWD2572-3



CWD2972-3




CWD3172-3




CWD3372-3


78 13/32"(1994)  
79 15/16"(2030)  
76 3/4"(1949)  
76"(1930)  
33 1/8"(841)




CWD2176-3




CWD2576-3



CWD2976-3



CWD3176-3




CWD3376-3

82 13/32"(2093)  
83 15/16"(2132)  
80 3/4"(2051)  
80"(2032)  
35 1/8"(892)




CWD2180-3




CWD2580-3



CWD2980-3




CWD3180-3




CWD3380-3

90 13/32"(2296)  
91 15/16"(2335)  
88 3/4"(2254)  
88"(2235)  
39 1/8"(994)



CWD2188-3



CWD2588-3



CWD2988-3




CWD3188-3




CWD3388-3


94 13/32"(2398)  
95 15/16"(2437)  
92 3/4"(2356)  
92"(2337)  
41 1/8"(1045)



CWD2192-3




CWD2592-3



CWD2992-3




CWD3192-3




CWD3392-3


98 13/32"(2500)  
99 15/16"(2538)  
96 3/4"(2457)  
96"(2438)  
43 1/8"(1085)




CWD2196-3




CWD2596-3



CWD2996-3




CWD3196-3




CWD3396-3


100 13/32"(2550)  
101 15/16"(2588)  
98 3/4"(2508)  
98"(2489)  
44 1/8"(1146)




CWD2198-3




CWD2598-3



CWD2998-3



CWD3198-3



CWD3398-3

**ELEVATION SYMBOL LEGEND:**

M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS  
VALUES IN [ ] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT  
E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.  
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.  
T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.  
## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.  
### NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.  
Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**3 WIDE UNITS**

MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING

109 3/8"(2778)  
112 7/16"(2856)  
106 7/8"(2715)  
106 1/8"(2696)  
29 7/16"[3](748)[3]

115 3/8"(2931)  
118 7/16"(3008)  
112 7/8"(2867)  
112 1/8"(2848)  
31 7/16"[3](799)[3]


127 3/8"(3235)  
130 7/16"(3313)  
124 7/8"(3172)  
124 1/8"(3153)  
35 7/16"[3](900)[3]

139 3/8"(3540)  
142 7/16"(3618)  
136 7/8"(3477)  
136 1/8"(3458)  
39 7/16"[3](1002)[3]


34 13/32"(874)  
35 15/16"(913)  
32 3/4"(832)  
32"(813)  
11 1/8"(283)



CWD3532-3



CWD3732-3



CWD4132-3




CWD4532-3

38 13/32"(976)  
39 15/16"(1014)  
36 3/4"(933)  
36"(914)  
13 1/8"(333)



CWD3536-3



CWD3736-3



CWD4136-3



CWD4536-3

42 13/32"(1077)  
43 15/16"(1116)  
40 3/4"(1035)  
40"(1016)  
15 1/8"(384)



CWD3540-3



CWD3740-3



CWD4140-3



CWD4540-3

46 13/32"(1179)  
47 15/16"(1218)  
44 3/4"(1137)  
44"(1118)  
17 1/8"(435)



CWD3544-3



CWD3744-3



CWD4144-3



CWD4544-3

50 13/32"(1280)  
51 15/16"(1319)  
48 3/4"(1238)  
48"(1219)  
19 1/8"(486)



CWD3548-3



CWD3748-3



CWD4148-3



CWD4548-3

54 13/32"(1382)  
55 15/16"(1421)  
52 3/4"(1340)  
52"(1321)  
21 1/8"(537)



CWD3552-3



CWD3752-3



CWD4152-3



CWD4552-3

58 13/32"(1484)  
59 15/16"(1522)  
56 3/4"(1441)  
56"(1422)  
23 1/8"(587)



CWD3556-3



CWD3756-3



CWD4156-3



CWD4556-3

62 13/32"(1585)  
63 15/16"(1624)  
60 3/4"(1543)  
60"(1524)  
25 1/8"(638)



CWD3560-3



CWD3760-3



CWD4160-3



CWD4560-3

66 13/32"(1687)  
67 15/16"(1726)  
64 3/4"(1645)  
64"(1626)  
27 1/8"(689)



CWD3564-3



CWD3764-3



CWD4164-3



CWD4564-3

70 13/32"(1788)  
71 15/16"(1827)  
68 3/4"(1746)  
68"(1727)  
29 1/8"(740)



CWD3568-3



CWD3768-3



CWD4168-3



CWD4568-3

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- VALUES IN [ ] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ##\* NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**3 WIDE UNITS**

MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING

109 3/8"(2778)  
112 7/16"(2856)  
106 7/8"(2715)  
106 1/8"(2696)  
29 7/16"[3](748)[3]

115 3/8"(2931)  
118 7/16"(3008)  
112 7/8"(2867)  
112 1/8"(2848)  
31 7/16"[3](799)[3]

127 3/8"(3235)  
130 7/16"(3313)  
124 7/8"(3172)  
124 1/8"(3153)  
35 7/16"[3](900)[3]

139 3/8"(3540)  
142 7/16"(3618)  
136 7/8"(3478)  
136 1/8"(3458)  
39 7/16"[3](1002)[3]

74 13/32"(1890) 75 15/16"(1929) 72 3/4"(1948) 72"(1829) 31 1/8"(791)				
78 13/32"(1944) 79 15/16"(2030) 76 3/4"(1949) 76"(1900) 33 1/8"(841)				
82 13/32"(2093) 83 15/16"(2132) 80 3/4"(2051) 80"(2032) 35 1/8"(892)				
90 13/32"(2286) 91 15/16"(2335) 88 3/4"(2254) 88"(2235) 39 1/8"(994)				
94 13/32"(2398) 95 15/16"(2437) 92 3/4"(2356) 92"(2337) 41 1/8"(1045)				
98 13/32"(2500) 99 15/16"(2538) 96 3/4"(2457) 96"(2438) 43 1/8"(1095)				
100 13/32"(2550) 101 15/16"(2589) 98 3/4"(2508) 98"(2489) 44 1/8"(1146)				

**ELEVATION SYMBOL LEGEND:**

M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS  
VALUES IN [ ] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT  
E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.  
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.  
T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.  
## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.  
##\* NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.  
Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**COTTAGE SINGLE UNITS**

MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING

24 5/8"(625)  
27 11/16"(703)  
22 1/8"(562)  
21 3/8"(543)  
15 7/16"(392)

28 5/8"(727)  
31 11/16"(805)  
26 1/8"(664)  
25 3/8"(645)  
19 7/16"(494)

32 5/8"(829)  
35 11/16"(906)  
30 1/8"(765)  
29 3/8"(746)  
23 7/16"(595)


34 5/8"(879)  
37 11/16"(957)  
32 1/8"(816)  
31 3/8"(797)  
25 7/16"(646)

36 5/8"(930)  
39 11/16"(1008)  
34 1/8"(867)  
33 3/8"(848)  
27 7/16"(697)


38 5/8"(981)  
41 11/16"(1059)  
36 1/8"(918)  
35 3/8"(899)  
29 7/16"(740)

40 5/8"(1032)  
43 11/16"(1110)  
38 1/8"(968)  
37 3/8"(949)  
31 7/16"(799)


50 13/32"(1280)  
51 15/16"(1319)  
48 3/4"(1238)  
48 1/2"(1219)  
14 13/16"(376)  
23 7/16"(605)




CWD2148C24




CWD2548C24




CWD2948C24




CWD3148C24



CWD3348C24




CWD3548C24




CWD3748C24


56 13/32"(1484)  
59 15/16"(1522)  
56 3/4"(1441)  
56 1/2"(1422)  
18 13/16"(478)  
27 7/16"(697)




CWD2156C28




CWD2556C28




CWD2956C28




CWD3156C28



CWD3356C28




CWD3556C28




CWD3756C28


66 13/32"(1687)  
67 15/16"(1726)  
64 3/4"(1645)  
64 1/2"(1626)  
20 13/16"(529)  
33 7/16"(849)




CWD2164C34




CWD2564C34




CWD2964C34




CWD3164C34



CWD3364C34




CWD3564C34




CWD3764C34


70 13/32"(1788)  
71 15/16"(1827)  
68 3/4"(1746)  
68 1/2"(1727)  
22 13/16"(579)  
35 7/16"(900)




CWD2168C36




CWD2568C36




CWD2968C36




CWD3168C36



CWD3368C36




CWD3568C36




CWD3768C36


82 13/32"(2093)  
83 15/16"(2132)  
80 3/4"(2051)  
80 1/2"(2032)  
30 13/16"(783)  
39 7/16"(1002)




CWD2180C40




CWD2580C40




CWD2980C40




CWD3180C40



CWD3380C40



CWD3580C40



CWD3780C40

**ELEVATION SYMBOL LEGEND:**

M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS  
E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.  
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.  
T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.  
## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.  
### NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.  
Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


**ELEVATIONS**  
**COTTAGE SINGLE UNITS**

MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING


44 5/8"(1133)  
47 11/16"(1211)  
42 1/8"(1070)  
41 3/8"(1051)  
35 7/16"(900)

48 5/8"(1235)  
51 11/16"(1313)  
46 1/8"(1172)  
45 3/8"(1153)  
39 7/16"(1002)

50 13/32"(1280)  
51 15/16"(1319)  
48 3/4"(1238)  
48"(1219)  
14 13/16"(376)  
23 7/16"(595)




CWD4148C24




CWD4548C24

58 13/32"(1484)  
59 15/16"(1522)  
56 3/4"(1441)  
56"(1422)  
18 13/16"(478)  
27 7/16"(697)




CWD4156C28




CWD4556C28

66 13/32"(1687)  
67 15/16"(1726)  
64 3/4"(1645)  
64"(1626)  
20 13/16"(529)  
33 7/16"(849)




CWD4164C34




CWD4564C34

70 13/32"(1788)  
71 15/16"(1827)  
68 3/4"(1746)  
68"(1727)  
22 13/16"(579)  
35 7/16"(900)



CWD4168C36



CWD4568C36

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E| BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ### NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**COTTAGE TWIN UNITS**

	46"(1168)	54"(1372)	62"(1575)	66"(1676)	70"(1778)	74"(1880)	78"(1981)
MO BRICKMOLD	49 1/16"(1246)	57 1/16"(1449)	64 1/16"(1627)	68 1/16"(1729)	72 1/16"(1830)	76 1/16"(1932)	80 1/16"(2034)
MO FLAT CASING	43 1/2"(1105)	51 1/2"(1283)	59 1/2"(1511)	63 1/2"(1613)	67 1/2"(1715)	71 1/2"(1816)	75 1/2"(1918)
ROUGH OPENING	42 3/4"(1086)	50 3/4"(1289)	58 3/4"(1492)	62 3/4"(1594)	66 3/4"(1695)	70 3/4"(1797)	74 3/4"(1899)
FRAME SIZE	15 7/16"[2](392)[2]	19 7/16"[2](494)[2]	23 7/16"[2](595)[2]	25 7/16"[2](646)[2]	27 7/16"[2](697)[2]	29 7/16"[2](740)[2]	31 7/16"[2](799)[2]
DAYLIGHT OPENING							
	50 13/32"(1280) 51 15/16"(1319) 48 3/4"(1238) 48"(1219) 14 13/16"(376) 23 7/16"(595)						
	CWD2148C24-2	CWD2548C24-2	CWD2948C24-2	CWD3148C24-2	CWD3348C24-2	CWD3548C24-2	CWD3748C24-2
	58 13/32"(1484) 59 15/16"(1522) 56 3/4"(1441) 56"(1422) 18 13/16"(478) 27 7/16"(697)						
	CWD2156C28-2	CWD2556C28-2	CWD2956C28-2	CWD3156C28-2	CWD3356C28-2	CWD3556C28-2	CWD3756C28-2
	66 13/32"(1687) 67 15/16"(1726) 64 3/4"(1645) 64"(1626) 20 13/16"(529) 33 7/16"(849)						
	CWD2164C34-2	CWD2564C34-2	CWD2964C34-2	CWD3164C34-2	CWD3364C34-2	CWD3564C34-2	CWD3764C34-2
	70 13/32"(1789) 71 15/16"(1827) 68 3/4"(1746) 68"(1727) 22 13/16"(579) 35 7/16"(900)						
	CWD2168C36-2	CWD2568C36-2	CWD2968C36-2	CWD3168C36-2	CWD3368C36-2	CWD3568C36-2	CWD3768C36-2
	82 13/32"(2083) 83 15/16"(2132) 80 3/4"(2051) 80"(2032) 30 13/16"(783) 39 7/16"(1002)						
	CWD2180C40-2	CWD2580C40-2	CWD2980C40-2	CWD3180C40-2	CWD3380C40-2	CWD3580C40-2	CWD3780C40-2

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- VALUES IN [ ] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ### NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.


Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.




**ELEVATIONS**  
**COTTAGE TWIN UNITS**

MO BRICKMOLD	86"(2184)	94"(2388)
MO FLAT CASING	88 1/16"(2237)	96 1/16"(2440)
ROUGH OPENING	83 1/2"(2121)	91 1/2"(2324)
FRAME SIZE	82 3/4"(2102)	90 3/4"(2305)
DAYLIGHT OPENING	35 7/16"[2](900)[2]	39 7/16"[2](1002)[2]

50 13/32"(1280)  
51 15/16"(1319)  
48 3/4"(1238)  
48 1/2"(1219)  
14 13/16"(376)  
23 7/16"(595)




CWD4148C24-2




CWD4548C24-2

58 13/32"(1484)  
59 15/16"(1522)  
56 3/4"(1441)  
56 1/2"(1422)  
18 13/16"(478)  
27 7/16"(687)




CWD4156C28-2




CWD4556C28-2

66 13/32"(1687)  
67 15/16"(1726)  
64 3/4"(1645)  
64 1/2"(1626)  
20 13/16"(529)  
33 7/16"(849)




CWD4164C34-2




CWD4564C34-2

70 13/32"(1788)  
71 15/16"(1827)  
68 3/4"(1746)  
68 1/2"(1727)  
22 13/16"(579)  
35 7/16"(900)



CWD4168C36-2



CWD4568C36-2

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- VALUES IN [ ] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ##\* NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
COTTAGE 3 WIDE UNITS

MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING

67 3/8"(1711)  
70 7/16"(1789)  
64 7/8"(1648)  
64 1/8"(1629)  
15 7/16"[3](392)[3]

79 3/8"(2016)  
82 7/16"(2094)  
76 7/8"(1946)  
76 1/8"(1934)  
19 7/16"[3](494)[3]

91 3/8"(2321)  
94 7/16"(2399)  
88 7/8"(2257)  
88 1/8"(2238)  
23 7/16"[3](595)[3]

97 3/8"(2473)  
100 7/16"(2551)  
94 7/8"(2410)  
94 1/8"(2391)  
25 7/16"[3](646)[3]

103 3/8"(2626)  
106 7/16"(2704)  
100 7/8"(2556)  
100 1/8"(2543)  
27 7/16"[3](697)[3]


50 13/32"(1280)  
51 15/16"(1318)  
48 3/4"(1238)  
48 1/2"(1219)  
14 13/16"(376)  
23 7/16"(595)




CWD2148C24-3




CWD2548C24-3



CWD2948C24-3




CWD3148C24-3




CWD3348C24-3


58 13/32"(1484)  
59 15/16"(1522)  
56 3/4"(1441)  
56 5/8"(1422)  
18 13/16"(478)  
27 7/16"(697)




CWD2156C28-3




CWD2556C28-3



CWD2956C28-3




CWD3156C28-3




CWD3356C28-3


66 13/32"(1687)  
67 15/16"(1726)  
64 3/4"(1646)  
64 1/2"(1627)  
20 13/16"(529)  
33 7/16"(848)




CWD2164C34-3




CWD2564C34-3



CWD2964C34-3




CWD3164C34-3




CWD3364C34-3


70 13/32"(1788)  
71 15/16"(1827)  
68 3/4"(1746)  
68 1/2"(1727)  
22 13/16"(579)  
35 7/16"(900)




CWD2168C36-3




CWD2568C36-3



CWD2968C36-3




CWD3168C36-3




CWD3368C36-3


82 13/32"(2083)  
83 15/16"(2132)  
80 3/4"(2051)  
80 1/2"(2032)  
30 13/16"(783)  
39 7/16"(1002)




CWD2180C40-3




CWD2580C40-3



CWD2980C40-3



CWD3180C40-3



CWD3380C40-3

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASONRY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- VALUES IN [ ] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ##\* NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**COTTAGE 3 WIDE UNITS**

MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING


109 3/8"(2778)  
112 7/16"(2856)  
106 7/8"(2715)  
106 1/8"(2696)  
29 7/16"[3](748)[3]

115 3/8"(2931)  
118 7/16"(3008)  
112 7/8"(2867)  
112 1/8"(2848)  
31 7/16"[3](799)[3]


127 3/8"(3235)  
130 7/16"(3313)  
124 7/8"(3172)  
124 1/8"(3153)  
35 7/16"[3](900)[3]

139 3/8"(3540)  
142 7/16"(3618)  
136 7/8"(3477)  
136 1/8"(3458)  
39 7/16"[3](1002)[3]


50 13/32"(1280)  
51 15/16"(1319)  
48 3/4"(1238)  
48"(1219)  
14 13/16"(376)  
23 7/16"(595)




CWD3548C24-3



CWD3748C24-3




CWD4148C24-3




CWD4548C24-3


58 13/32"(1484)  
59 15/16"(1522)  
56 3/4"(1441)  
56"(1422)  
18 13/16"(478)  
27 7/16"(697)




CWD3556C28-3



CWD3756C28-3




CWD4156C28-3




CWD4556C28-3


66 13/32"(1687)  
67 15/16"(1726)  
64 3/4"(1645)  
64"(1626)  
20 13/16"(529)  
33 7/16"(849)




CWD3564C64-3



CWD3764C64-3




CWD4164C64-3




CWD4564C64-3


70 13/32"(1788)  
71 15/16"(1827)  
68 3/4"(1746)  
68"(1727)  
22 13/16"(579)  
35 7/16"(900)




CWD3568C36-3



CWD3768C36-3




CWD4168C36-3




CWD4568C36-3

82 13/32"(2093)  
83 15/16"(2132)  
80 3/4"(2051)  
80"(2032)  
30 13/16"(783)  
39 7/16"(1002)



CWD3580C40-3



CWD3780C40-3

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- VALUES IN [ ] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE, STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- # NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ## NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

#### ELEVATIONS

#### REVERSE COTTAGE SINGLE UNITS

MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING

24 5/8"(625)  
27 11/16"(703)  
22 1/8"(562)  
21 3/8"(543)  
15 7/16"(392)

28 5/8"(727)  
31 11/16"(805)  
26 1/8"(664)  
25 3/8"(645)  
19 7/16"(494)

32 5/8"(829)  
35 11/16"(906)  
30 1/8"(765)  
29 3/8"(746)  
23 7/16"(595)


34 5/8"(879)  
37 11/16"(957)  
32 1/8"(816)  
31 3/8"(797)  
25 7/16"(646)

36 5/8"(930)  
39 11/16"(1008)  
34 1/8"(867)  
33 3/8"(848)  
27 7/16"(697)


38 5/8"(981)  
41 11/16"(1059)  
36 1/8"(918)  
35 3/8"(899)  
29 7/16"(740)

40 5/8"(1032)  
43 11/16"(1110)  
38 1/8"(968)  
37 3/8"(949)  
31 7/16"(799)


50 13/32"(1280)  
51 15/16"(1318)  
48 3/4"(1286)  
47 1/2"(1270)  
22 13/16"(579)  
15 7/16"(392)




CWD2148R16




CWD2548R16




CWD2948R16



CWD3148R16



CWD3348R16




CWD3548R16




CWD3748R16


58 13/32"(1484)  
59 15/16"(1522)  
56 3/4"(1491)  
55 1/2"(1475)  
26 13/16"(681)  
19 7/16"(494)




CWD2156R20




CWD2556R20




CWD2956R20




CWD3156R20



CWD3356R20




CWD3556R20




CWD3756R20


66 13/32"(1687)  
67 15/16"(1726)  
64 3/4"(1695)  
63 1/2"(1679)  
30 13/16"(823)  
21 7/16"(545)




CWD2164R22




CWD2564R22




CWD2964R22



CWD3164R22



CWD3364R22




CWD3564R22




CWD3764R22


70 13/32"(1788)  
71 15/16"(1827)  
68 3/4"(1746)  
67 1/2"(1730)  
34 13/16"(884)  
23 7/16"(695)




CWD2168R24



CWD2568R24



CWD2968R24



CWD3168R24



CWD3368R24




CWD3568R24




CWD3768R24


82 13/32"(2093)  
83 15/16"(2132)  
80 3/4"(2051)  
79 1/2"(1996)  
38 13/16"(986)  
31 7/16"(800)




CWD2180R32




CWD2580R32




CWD2980R32



CWD3180R32



CWD3380R32



CWD3580R32



CWD3780R32

**ELEVATION SYMBOL LEGEND:**

M.O. = MASORNY OPENING

VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS

E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.

E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.

T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.

## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.

### NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" (12.7) from M.O. (Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


**ELEVATIONS**  
**REVERSE COTTAGE SINGLE UNITS**

MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING


44 5/8"(1133)  
47 11/16"(1211)  
42 1/8"(1070)  
41 3/8"(1051)  
35 7/16"(900)

48 5/8"(1235)  
51 11/16"(1313)  
46 1/8"(1172)  
45 3/8"(1153)  
39 7/16"(1002)

50 13/32"(1280)  
51 15/16"(1319)  
48 3/4"(1238)  
48"(1219)  
22 13/16"(579)  
15 7/16"(392)




CWD4148R16




CWD4548R16

58 13/32"(1484)  
59 15/16"(1522)  
56 3/4"(1441)  
56"(1422)  
26 13/16"(681)  
19 7/16"(494)




CWD4156R20




CWD4556R20

66 13/32"(1687)  
67 15/16"(1726)  
64 3/4"(1645)  
64"(1626)  
30 13/16"(783)  
21 7/16"(545)




CWD4164R22




CWD4564R22

70 13/32"(1788)  
71 15/16"(1827)  
68 3/4"(1746)  
68"(1727)  
34 13/16"(884)  
23 7/16"(595)



CWD4168R24



CWD4568R24

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ##\* NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**REVERSE COTTAGE TWIN UNITS**

	46"(1168)	54"(1372)	62"(1575)	66"(1676)	70"(1778)	74"(1880)	78"(1981)
MO BRICKMOLD	49 1/16"(1246)	57 1/16"(1449)	64 1/16"(1627)	68 1/16"(1729)	72 1/16"(1830)	76 1/16"(1932)	80 1/16"(2034)
MO FLAT CASING	43 1/2"(1105)	51 1/2"(1283)	59 1/2"(1511)	63 1/2"(1613)	67 1/2"(1715)	71 1/2"(1816)	75 1/2"(1918)
ROUGH OPENING	42 3/4"(1086)	50 3/4"(1289)	58 3/4"(1492)	62 3/4"(1594)	66 3/4"(1695)	70 3/4"(1797)	74 3/4"(1899)
FRAME SIZE	15 7/16"[2](392)[2]	19 7/16"[2](494)[2]	23 7/16"[2](595)[2]	25 7/16"[2](646)[2]	27 7/16"[2](697)[2]	29 7/16"[2](740)[2]	31 7/16"[2](799)[2]
DAYLIGHT OPENING	50 13/32"(1280) 51 15/16"(1319) 48 3/4"(1238) 48"(1219) 22 13/16"(579) 15 7/16"(392)						
	CWD2148R16-2	CWD2548R16-2	CWD2948R16-2	CWD3148R16-2	CWD3348R16-2	CWD3548R16-2	CWD3748R16-2
	58 13/32"(1484) 59 15/16"(1522) 56 3/4"(1441) 56"(1422) 26 13/16"(681) 19 7/16"(494)						
	CWD2156R20-2	CWD2556R20-2	CWD2956R20-2	CWD3156R20-2	CWD3356R20-2	CWD3556R20-2	CWD3756R20-2
	66 13/32"(1687) 67 15/16"(1726) 64 3/4"(1645) 64"(1626) 32 13/16"(833) 21 7/16"(645)						
	CWD2164R22-2	CWD2564R22-2	CWD2964R22-2	CWD3164R22-2	CWD3364R22-2	CWD3564R22-2	CWD3764R22-2
	70 13/32"(1788) 71 15/16"(1827) 68 3/4"(1746) 68"(1727) 34 13/16"(864) 23 7/16"(696)						
	CWD2168R24-2	CWD2568R24-2	CWD2968R24-2	CWD3168R24-2	CWD3368R24-2	CWD3568R24-2	CWD3768R24-2
	82 13/32"(2093) 83 15/16"(2132) 80 3/4"(2051) 80"(2032) 38 13/16"(986) 31 7/16"(799)						
	CWD2180R32-2	CWD2580R32-2	CWD2980R32-2	CWD3180R32-2	CWD3380R32-2	CWD3580R32-2	CWD3780R32-2

**ELEVATION SYMBOL LEGEND:**


- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- VALUES IN [ ] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ##\* NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


**ELEVATIONS**  
**REVERSE COTTAGE TWIN UNITS**

MO BRICKMOLD	86"(2184)	94"(2388)
MO FLAT CASING	88 1/16"(2237)	96 1/16"(2440)
ROUGH OPENING	83 1/2"(2121)	91 1/2"(2324)
FRAME SIZE	82 3/4"(2102)	90 3/4"(2305)
DAYLIGHT OPENING	35 7/16"[2](900)[2]	39 7/16"[2](1002)[2]

50 13/32"(1580)  
51 15/16"(1519)  
48 3/4"(1238)  
48"(1219)  
22 13/16"(579)  
15 7/16"(392)




CWD4148R16-2




CWD4548R16-2

58 13/32"(1484)  
59 15/16"(1522)  
56 3/4"(1441)  
56"(1422)  
26 13/16"(681)  
19 7/16"(494)




CWD4156R20-2




CWD4556R20-2

66 13/32"(1687)  
67 15/16"(1726)  
64 3/4"(1645)  
64"(1626)  
32 13/16"(833)  
21 7/16"(545)




CWD4164R22-2




CWD4564R22-2

70 13/32"(1788)  
71 15/16"(1827)  
68 3/4"(1746)  
68"(1727)  
34 13/16"(884)  
23 7/16"(595)



CWD4168R24-2



CWD4568R24-2

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- VALUES IN [ ] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ##\* NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**REVERSE COTTAGE 3 WIDE UNITS**

	MO BRICKMOLD	79 3/8"(2016)	91 3/8"(2321)	97 3/8"(2473)	103 3/8"(2626)
	70 7/16"(1789)	82 7/16"(2094)	94 7/16"(2399)	100 7/16"(2551)	106 7/16"(2704)
	64 7/8"(1648)	76 7/8"(1946)	88 7/8"(2257)	94 7/8"(2410)	100 7/8"(2556)
	64 1/8"(1629)	76 1/8"(1934)	88 1/8"(2238)	94 1/8"(2391)	100 1/8"(2543)
DAYLIGHT OPENING	15 7/16"[3](392)[3]	19 7/16"[3](494)[3]	23 7/16"[3](595)[3]	25 7/16"[3](646)[3]	27 7/16"[3](697)[3]
50 13/32"(1280)					
51 15/16"(1319)	CWD2148R16-3	CWD2548R16-3	CWD2948R16-3	CWD3148R16-3	CWD3348R16-3
48 3/4"(1236)					
46 1/2"(119)					
22 13/16"(579)					
15 7/16"(392)					
58 13/32"(1484)					
59 15/16"(1522)	CWD2156R20-3	CWD2556R20-3	CWD2956R20-3	CWD3156R20-3	CWD3356R20-3
56 3/4"(1441)					
46 1/2"(119)					
26 13/16"(681)					
19 7/16"(494)					
66 13/32"(1687)					
67 15/16"(1726)	CWD2164R22-3	CWD2564R22-3	CWD2964R22-3	CWD3164R22-3	CWD3364R22-3
64 3/4"(1645)					
44 1/2"(119)					
32 13/16"(833)					
21 7/16"(545)					
70 13/32"(1788)					
71 15/16"(1827)	CWD2168R24-3	CWD2568R24-3	CWD2968R24-3	CWD3168R24-3	CWD3368R24-3
68 3/4"(1746)					
44 1/2"(119)					
34 1/8"(864)					
23 7/16"(595)					
82 13/32"(2093)					
83 15/16"(2132)	CWD2180R32-3	CWD2580R32-3	CWD2980R32-3	CWD3180R32-3	CWD3380R32-3
80 3/4"(2051)					
44 1/2"(119)					
38 13/16"(966)					
31 7/16"(795)					

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- VALUES IN [ ] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ### NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.



**ELEVATIONS**  
REVERSE COTTAGE 3 WIDE UNITS

MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING


109 3/8"(2778)  
112 7/16"(2856)  
106 7/8"(2715)  
106 1/8"(2696)  
29 7/16"[3](748)[3]

115 3/8"(2931)  
118 7/16"(3008)  
112 7/8"(2867)  
112 1/8"(2848)  
31 7/16"[3](799)[3]


127 3/8"(3235)  
130 7/16"(3313)  
124 7/8"(3172)  
124 1/8"(3153)  
35 7/16"[3](900)[3]

139 3/8"(3540)  
142 7/16"(3618)  
136 7/8"(3477)  
136 1/8"(3458)  
39 7/16"[3](1002)[3]


50 13/32"(1280)  
51 15/16"(1319)  
48 3/4"(1238)  
48"(1219)  
22 13/16"(579)  
15 7/16"(392)




CWD3548R16-3



CWD3748R16-3




CWD4148R16-3




CWD4548R16-3


58 13/32"(1484)  
59 15/16"(1522)  
56 3/4"(1441)  
56"(1422)  
26 13/16"(681)  
19 7/16"(494)




CWD3556R20-3



CWD3756R20-3




CWD4156R20-3




CWD4556R20-3


66 13/32"(1687)  
67 15/16"(1726)  
64 3/4"(1645)  
64"(1626)  
32 13/16"(833)  
21 7/16"(545)




CWD3564R22-3



CWD3764R22-3




CWD4164R22-3




CWD4564R22-3


70 13/32"(1788)  
71 15/16"(1827)  
68 3/4"(1746)  
68"(1727)  
34 13/16"(884)  
23 7/16"(595)




CWD3568R24-3



CWD3768R24-3




CWD4168R24-3




CWD4568R24-3

82 13/32"(2093)  
83 15/16"(2132)  
80 3/4"(2051)  
80"(2032)  
38 13/16"(986)  
31 7/16"(799)



CWD3580R32-3



CWD3780R32-3

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- VALUES IN [ ] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- # NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ## NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

#### ELEVATIONS

#### RADIUS TOP





























	24 1/2"(622)	28 1/2"(724)	32 1/2"(826)	34 1/2"(876)	36 1/2"(927)	38 1/2"(978)	40 1/2"(1029)
MO BRICKMOLD	27 9/16"(700)	31 9/16"(802)	35 9/16"(903)	37 9/16"(954)	39 9/16"(1005)	41 9/16"(1056)	43 9/16"(1106)
MO FLAT CASING	22"(589)	26"(660)	30"(762)	32"(813)	34"(864)	36"(914)	38"(965)
ROUGH OPENING	21 1/4"(540)	25 1/4"(641)	29 1/4"(743)	31 1/4"(794)	33 1/4"(845)	35 1/4"(895)	37 1/4"(946)
FRAME SIZE	15 5/16"(389)	19 5/16"(491)	23 5/16"(592)	25 5/16"(643)	27 5/16"(694)	29 5/16"(744)	31 5/16"(795)
DAYLIGHT OPENING							
	34 27/32"(885)						
	36 3/8"(924)						
	33 3/16"(853)						
	32 11/16"(834)						
	11 5/32"(283)						
	CWDR1612	CWDR2012	CWDR2412	CWDR2612	CWDR2812	CWDR3012	CWDR3212
	38 27/32"(987)						
	40 3/8"(1026)						
	37 3/16"(935)						
	36 1/8"(926)						
	13 5/32"(334)						
	CWDR1614	CWDR2014	CWDR2414	CWDR2614	CWDR2814	CWDR3014	CWDR3214
	42 27/32"(1088)						
	44 3/8"(1127)						
	41 3/16"(1035)						
	40 1/8"(1027)						
	15 5/32"(385)						
	CWDR1616	CWDR2016	CWDR2416	CWDR2616	CWDR2816	CWDR3016	CWDR3216
	46 27/32"(1190)						
	48 3/8"(1229)						
	45 3/16"(1141)						
	44 1/8"(1132)						
	17 5/32"(436)						
	CWDR1618	CWDR2018	CWDR2418	CWDR2618	CWDR2818	CWDR3018	CWDR3218
	50 27/32"(1291)						
	52 3/8"(1330)						
	49 3/16"(1240)						
	48 1/8"(1231)						
	19 5/32"(487)						
	CWDR1620	CWDR2020	CWDR2420	CWDR2620	CWDR2820	CWDR3020	CWDR3220
	54 27/32"(1393)						
	56 3/8"(1432)						
	53 3/16"(1340)						
	52 1/8"(1332)						
	21 5/32"(537)						
	CWDR1622	CWDR2022	CWDR2422	CWDR2622	CWDR2822	CWDR3022	CWDR3222

#### ELEVATION SYMBOL LEGEND:

- M.O. = MASONRY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ### NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**RADIUS TOP**

	24 1/2"(622)	28 1/2"(724)	32 1/2"(826)	34 1/2"(876)	36 1/2"(927)	38 1/2"(978)	40 1/2"(1029)
MO BRICKMOLD	27 9/16"(700)	31 9/16"(802)	35 9/16"(903)	37 9/16"(954)	39 9/16"(1005)	41 9/16"(1056)	43 9/16"(1106)
MO FLAT CASING	22"(589)	26"(660)	30"(762)	32"(813)	34"(864)	36"(914)	38"(965)
ROUGH OPENING	21 1/4"(540)	25 1/4"(641)	29 1/4"(743)	31 1/4"(794)	33 1/4"(845)	35 1/4"(895)	37 1/4"(946)
FRAME SIZE	15 5/16"(389)	19 5/16"(491)	23 5/16"(592)	25 5/16"(643)	27 5/16"(694)	29 5/16"(744)	31 5/16"(795)
DAYLIGHT OPENING							
							
68 27/32"(1495)							
60 3/8"(1534)							
57 3/16"(1645)							
56 7/16"(1434)							
23"(584)							
23 5/32"(588)							
	CWDR1624	CWDR2024	CWDR2424	CWDR2624	CWDR2824	CWDR3024	CWDR3224
							
62 27/32"(1696)							
64 3/8"(1635)							
61 3/16"(1340)							
60 7/16"(1535)							
25"(635)							
15 5/32"(639)							
	CWDR1626	CWDR2026	CWDR2426	CWDR2626	CWDR2826	CWDR3026	CWDR3226
							
66 27/32"(1696)							
66 3/8"(1737)							
65 3/16"(1949)							
64 7/16"(1637)							
27"(686)							
27 5/32"(690)							
	CWDR1628	CWDR2028	CWDR2428	CWDR2628	CWDR2828	CWDR3028	CWDR3228
							
70 27/32"(1799)							
72 3/8"(1838)							
69 3/16"(1949)							
68 7/16"(1738)							
29"(737)							
29 5/32"(741)							
	CWDR1630	CWDR2030	CWDR2430	CWDR2630	CWDR2830	CWDR3030	CWDR3230

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ##\* NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**RADIUS TOP**

	24 1/2"(622)	28 1/2"(724)	32 1/2"(826)	34 1/2"(876)	36 1/2"(927)	38 1/2"(978)	40 1/2"(1029)
MO BRICKMOLD	27 9/16"(700)	31 9/16"(802)	35 9/16"(903)	37 9/16"(954)	39 9/16"(1005)	41 9/16"(1056)	43 9/16"(1106)
MO FLAT CASING	22"(559)	26"(660)	30"(762)	32"(813)	34"(864)	36"(914)	38"(965)
ROUGH OPENING	21 1/4"(540)	25 1/4"(641)	29 1/4"(743)	31 1/4"(794)	33 1/4"(845)	35 1/4"(895)	37 1/4"(946)
FRAME SIZE	15 5/16"(389)	19 5/16"(491)	23 5/16"(592)	25 5/16"(643)	27 5/16"(694)	29 5/16"(744)	31 5/16"(795)
DAYLIGHT OPENING							
	CWDR1632	CWDR2032	CWDR2432	CWDR2632	CWDR2832	CWDR3032	CWDR3232
74 27/32"(1901)							
76 3/8"(1940)							
73 3/16"(1949)							
72 7/16"(1840)							
31"(787)							
31 5/32"(791)							
	CWDR1634	CWDR2034	CWDR2434	CWDR2634	CWDR2834	CWDR3034	CWDR3234
78 27/32"(2003)							
80 3/8"(2042)							
77 3/16"(1949)							
76 7/16"(1942)							
33"(838)							
33 5/32"(842)							
	CWDR1636	CWDR2036	CWDR2436	CWDR2636	CWDR2836	CWDR3036	CWDR3236
82 27/32"(2104)							
84 3/8"(2143)							
81 3/16"(1645)							
80 7/16"(2043)							
35"(889)							
35 5/32"(893)							
	CWDR1640	CWDR2040	CWDR2440	CWDR2640	CWDR2840	CWDR3040	CWDR3240
90 27/32"(2307)							
92 3/8"(2346)							
89 3/16"(1949)							
88 7/16"(2246)							
39"(991)							
39 5/32"(996)							

**ELEVATION SYMBOL LEGEND:**

M.O. = MASORNY OPENING  
 VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS  
 E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.  
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.  
 T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.  
 ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.  
 ##\* NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.  
 Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**RADIUS TOP**

MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING

24 1/2"(622)  
27 9/16"(700)  
22"(589)  
21 1/4"(540)  
15 5/16"(389)

28 1/2"(724)  
31 9/16"(802)  
26"(660)  
25 1/4"(641)  
19 5/16"(491)

32 1/2"(826)  
35 9/16"(903)  
30"(762)  
29 1/4"(743)  
23 5/16"(592)


34 1/2"(876)  
37 9/16"(954)  
32"(813)  
31 1/4"(794)  
25 5/16"(643)

36 1/2"(927)  
39 9/16"(1005)  
34"(864)  
33 1/4"(845)  
27 5/16"(694)


38 1/2"(978)  
41 9/16"(1056)  
36"(914)  
35 1/4"(895)  
29 5/16"(744)

40 1/2"(1029)  
43 9/16"(1106)  
38"(965)  
37 1/4"(946)  
31 5/16"(795)


82 27/32"(2104)  
84 3/8"(2143)  
81 3/16"(1645)  
80 7/16"(2043)  
38 3/4"(984)  
31 7/16"(799)




CWDR1640/32




CWDR2040/32




CWDR2440/32




CWDR2640/32



CWDR2840/32




CWDR3040/32




CWDR3240/32


94 27/32"(2409)  
96 3/8"(2448)  
93 3/16"(1949)  
92 7/16"(2348)  
41"(1041)  
41 5/32"(1045)




CWDR1692




CWDR2042




CWDR2442




CWDR2642



CWDR2842




CWDR3042




CWDR3242


98 27/32"(2511)  
100 3/8"(2550)  
97 3/16"(1949)  
96 7/16"(2450)  
43"(1092)  
43 5/32"(1096)




CWDR1644




CWDR2044




CWDR2444




CWDR2644



CWDR2844



CWDR3044



CWDR3244

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- E. UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ### NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**RADIUS TOP**


MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING

44 1/2"(1130)  
47 9/16"(1208)  
42"(1067)  
41 1/4"(1048)  
35 5/16"(897)

48 1/2"(1232)  
51 9/16"(1310)  
46"(1168)  
45 1/4"(1149)  
39 5/16"(999)

52 1/2"(1334)  
55 9/16"(1411)  
50"(1270)  
49 1/4"(1251)  
43 5/16"(1100)

34 27/32"(885)  
36 3/8"(924)  
33 3/16"(933)  
32 7/16"(824)  
11 1/2"(279)  
11 5/32"(283)




CWDR3612




CWDR4012

38 27/32"(987)  
40 3/8"(1026)  
37 3/16"(1035)  
36 7/16"(926)  
13"(330)  
13 5/32"(334)




CWDR3614




CWDR4014


42 27/32"(1088)  
44 3/8"(1127)  
41 3/16"(1238)  
40 7/16"(1027)  
15"(381)  
15 5/32"(385)



CWDR3616




CWDR4016




CWDR4416


46 27/32"(1190)  
48 3/8"(1229)  
45 3/16"(1441)  
44 7/16"(1129)  
17"(432)  
17 5/32"(436)



CWDR3618




CWDR4018




CWDR4418


50 27/32"(1291)  
52 3/8"(1330)  
49 3/16"(1340)  
48 7/16"(1230)  
19"(483)  
19 5/32"(487)



CWDR3620




CWDR4020




CWDR4420


54 27/32"(1393)  
56 3/8"(1432)  
53 3/16"(1746)  
52 7/16"(1332)  
21"(533)  
21 5/32"(537)



CWDR3622



CWDR4022



CWDR4422

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ### NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**RADIUS TOP**


MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING

44 1/2"(1130)  
47 9/16"(1208)  
42"(1067)  
41 1/4"(1048)  
35 5/16"(897)


48 1/2"(1232)  
51 9/16"(1310)  
46"(1168)  
45 1/4"(1149)  
39 5/16"(999)

52 1/2"(1334)  
55 9/16"(1411)  
50"(1270)  
49 1/4"(1251)  
43 5/16"(1100)


58 27/32"(1495)  
60 3/8"(1534)  
57 3/16"(1445)  
56 7/16"(1434)  
23"(584)  
23 5/32"(588)

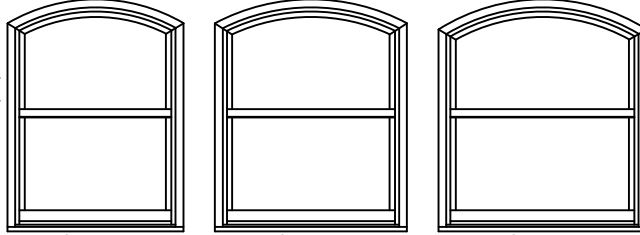


62 27/32"(1596)  
64 3/8"(1635)  
61 3/16"(1540)  
60 7/16"(1535)  
25"(635)  
15 5/32"(639)

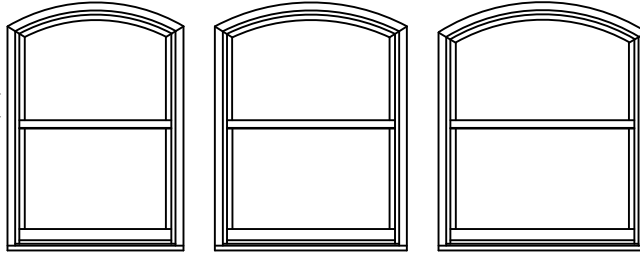

66 27/32"(1698)  
68 3/8"(1737)  
65 3/16"(1643)  
64 7/16"(1637)  
27"(686)  
27 5/32"(690)

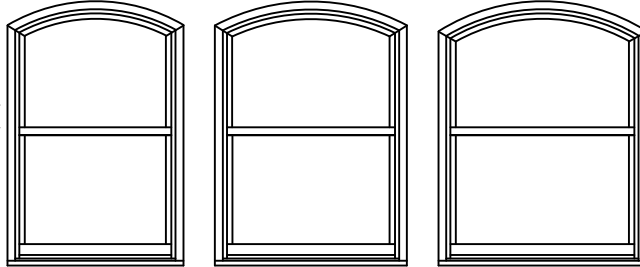

70 27/32"(1799)  
72 3/8"(1838)  
69 3/16"(1743)  
68 7/16"(1738)  
29"(737)  
29 5/32"(741)

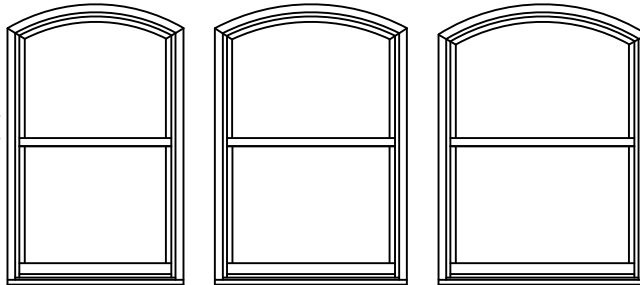

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ##\* NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**RADIUS TOP**


MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING

44 1/2"(1130)  
47 9/16"(1208)  
42"(1067)  
41 1/4"(1048)  
35 5/16"(897)


48 1/2"(1232)  
51 9/16"(1310)  
46"(1168)  
45 1/4"(1149)  
39 5/16"(999)

52 1/2"(1334)  
55 9/16"(1411)  
50"(1270)  
49 1/4"(1251)  
43 5/16"(1100)


74 27/32"(1901)  
76 3/8"(1940)  
73 3/16"(1849)  
72 7/16"(1840)  
51"(1287)  
31 5/32"(791)



CWDR3632




CWDR4032




CWDR4432


80 27/32"(2007)  
82 3/8"(2046)  
80 3/16"(1949)  
88 7/16"(2246)  
59"(1491)  
39 5/32"(995)



CWDR3634




CWDR4034




CWDR4434


82 27/32"(2104)  
84 3/8"(2143)  
81 3/16"(2046)  
80 7/16"(2046)  
55"(1393)  
35 5/32"(893)




CWDR3636




CWDR4036



CWDR4436



CWDR3640



CWDR4040

**ELEVATION SYMBOL LEGEND:**


M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS  
E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.  
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.  
T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.  
## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.  
### NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.  
Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.




**ELEVATIONS**  
**SECTOR TOP COTTAGE UNITS**

MO BRICKMOLD	24 1/2"(622)	28 1/2"(724)	32 1/2"(826)	34 1/2"(876)	36 1/2"(927)	38 1/2"(978)	40 1/2"(1029)
MO FLAT CASING	27 9/16"(700)	31 9/16"(802)	35 9/16"(903)	37 9/16"(954)	39 9/16"(1005)	41 9/16"(1056)	43 9/16"(1106)
ROUGH OPENING	22"(589)	26"(660)	30"(762)	32"(813)	34"(864)	36"(914)	38"(965)
FRAME SIZE	21 1/4"(540)	25 1/4"(641)	29 1/4"(743)	31 1/4"(794)	33 1/4"(845)	35 1/4"(895)	37 1/4"(946)
DAYLIGHT OPENING	15 5/16"(389)	19 5/16"(491)	23 5/16"(592)	25 5/16"(643)	27 5/16"(694)	29 5/16"(744)	31 5/16"(795)


50 27/32" (1291)  
52 3/8" (1330)  
49 3/16" (1240)  
41 3/4" (1250)  
23 7/16" (585)

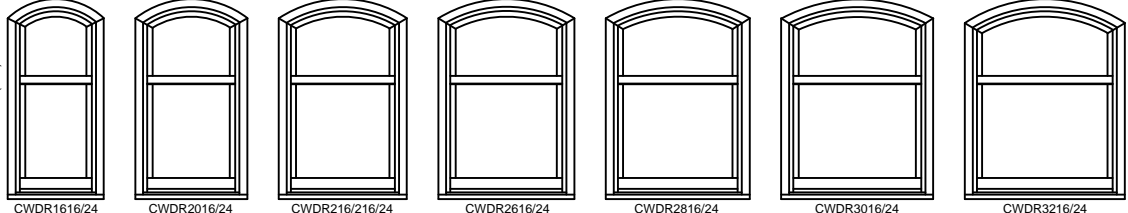


58 27/32" (1485)  
60 3/8" (1534)  
57 3/16" (1445)  
59 3/8" (1454)  
27 7/16" (687)

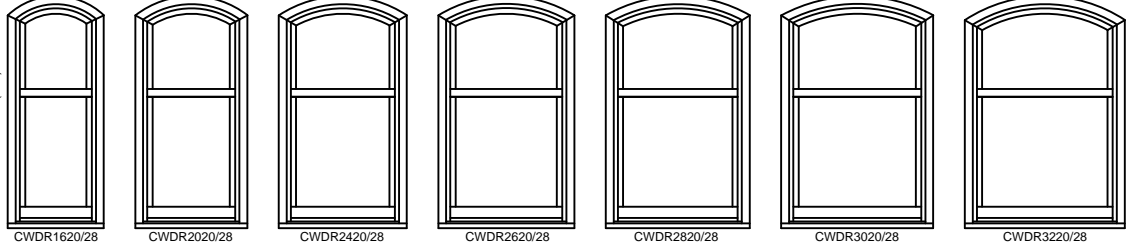


66 27/32" (1689)  
68 3/8" (1737)  
65 7/16" (1649)  
67 3/4" (1657)  
33 7/16" (849)

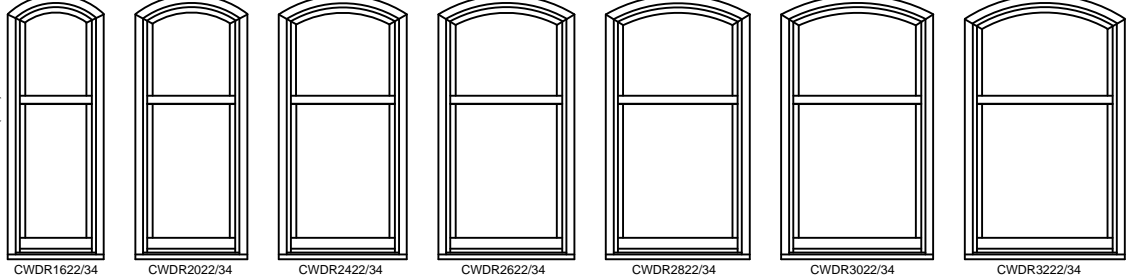

70 27/32" (1789)  
72 3/8" (1838)  
69 3/16" (1740)  
71 3/8" (1748)  
35 7/16" (900)

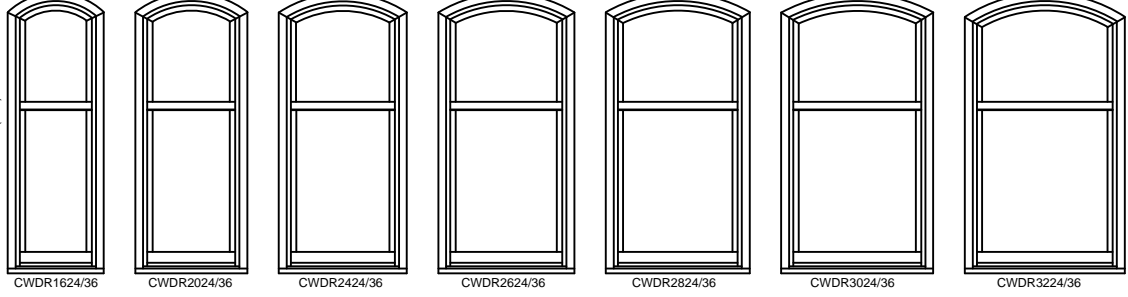

82 27/32" (2104)  
84 3/8" (2143)  
81 3/16" (2045)  
83 1/8" (2053)  
39 7/16" (1002)

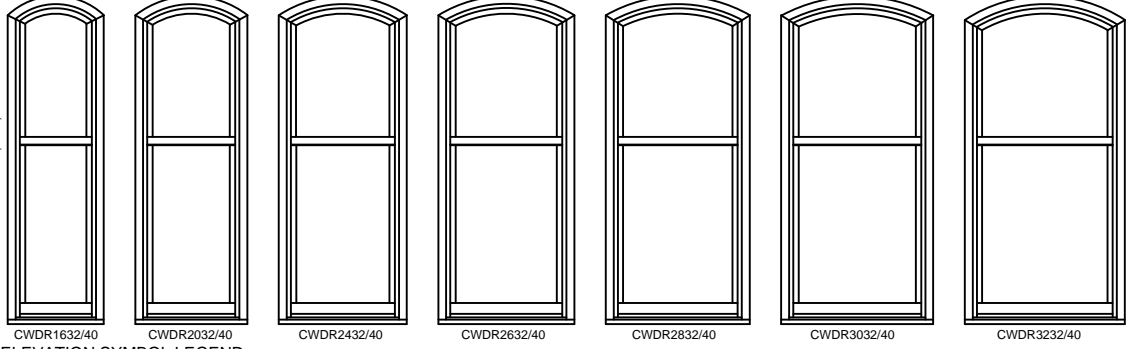


**ELEVATION SYMBOL LEGEND:**

M.O. = MASONRY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS  
E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.  
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.  
T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.  
## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.  
### NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.  
Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


**ELEVATIONS**  
**SECTOR TOP COTTAGE UNITS**

44 1/2"(1130)  
47 9/16"(1208)  
42"(1067)  
41 1/4"(1048)  
35 5/16"(897)




CWDR3616/24

48 1/2"(1232)  
51 9/16"(1310)  
46"(1168)  
45 1/4"(1149)  
39 5/16"(999)




CWDR4016/24


52 1/2"(1334)  
55 9/16"(1411)  
50"(1270)  
49 1/4"(1251)  
43 5/16"(1100)




CWDR4416/24




CWDR3620/28




CWDR4020/28




CWDR4420/28




CWDR3622/34




CWDR4022/34




CWDR4422/34




CWDR3624/36




CWDR4024/36



CWDR4424/36



CWDR3632/40






































CWDR4032/40

**ELEVATION SYMBOL LEGEND:**

M.O. = MASORNY OPENING  
 VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS  
 E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.  
 E1: BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.  
 T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.  
 ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.  
 ### NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.  
 Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


**ELEVATIONS**  
**RADIUS TOP REVERSE COTTAGE UNITS**

	24 1/2"(622)	28 1/2"(724)	32 1/2"(826)	34 1/2"(876)	36 1/2"(927)	38 1/2"(978)	40 1/2"(1029)
MO BRICKMOLD	27 9/16"(700)	31 9/16"(802)	35 9/16"(903)	37 9/16"(954)	39 9/16"(1005)	41 9/16"(1056)	43 9/16"(1106)
MO FLAT CASING	22"(589)	26"(660)	30"(762)	32"(813)	34"(864)	36"(914)	38"(965)
ROUGH OPENING	21 1/4"(540)	25 1/4"(641)	29 1/4"(743)	31 1/4"(794)	33 1/4"(845)	35 1/4"(895)	37 1/4"(946)
FRAME SIZE	15 5/16"(389)	19 5/16"(491)	23 5/16"(592)	25 5/16"(643)	27 5/16"(694)	29 5/16"(744)	31 5/16"(795)
DAYLIGHT OPENING							
50 27/32"(1291)							
52 3/8"(1330)	CWDR1624/16	CWDR2024/16	CWDR2424/16	CWDR2624/16	CWDR2824/16	CWDR3024/16	CWDR3224/16
49 3/16"(1340)							
48 3/8"(1340)							
48 3/8"(1340)							
48 3/8"(1340)							
21 3/4"(570)							
15 7/16"(392)							
58 27/32"(1495)							
60 3/8"(1533)	CWDR1628/20	CWDR2028/20	CWDR2428/20	CWDR2628/20	CWDR2828/20	CWDR3028/20	CWDR3228/20
57 3/16"(1645)							
57 3/16"(1645)							
57 3/16"(1645)							
26 3/4"(679)							
19 7/16"(494)							
66 27/32"(1699)							
68 3/8"(1737)	CWDR1634/22	CWDR2034/22	CWDR2434/22	CWDR2634/22	CWDR2834/22	CWDR3034/22	CWDR3234/22
65 3/16"(1645)							
65 3/16"(1645)							
65 3/16"(1645)							
32 3/4"(833)							
21 7/16"(545)							
70 27/32"(1799)							
72 3/8"(1836)	CWDR1636/24	CWDR2036/24	CWDR2436/24	CWDR2636/24	CWDR2836/24	CWDR3036/24	CWDR3236/24
69 3/16"(1744)							
69 3/16"(1744)							
69 3/16"(1744)							
34 1/4"(863)							
23 7/16"(595)							
82 27/32"(2104)							
84 3/8"(2143)	CWDR1640/32	CWDR2040/32	CWDR2440/32	CWDR2640/32	CWDR2840/32	CWDR3040/32	CWDR3240/32
81 3/16"(2045)							
81 3/16"(2045)							
81 3/16"(2045)							
38 3/4"(984)							
31 7/16"(798)							

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
  - VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
  - E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
  - E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
  - T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
  - ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
  - ### NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.
- Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**RADIUS TOP REVERSE COTTAGE UNITS**

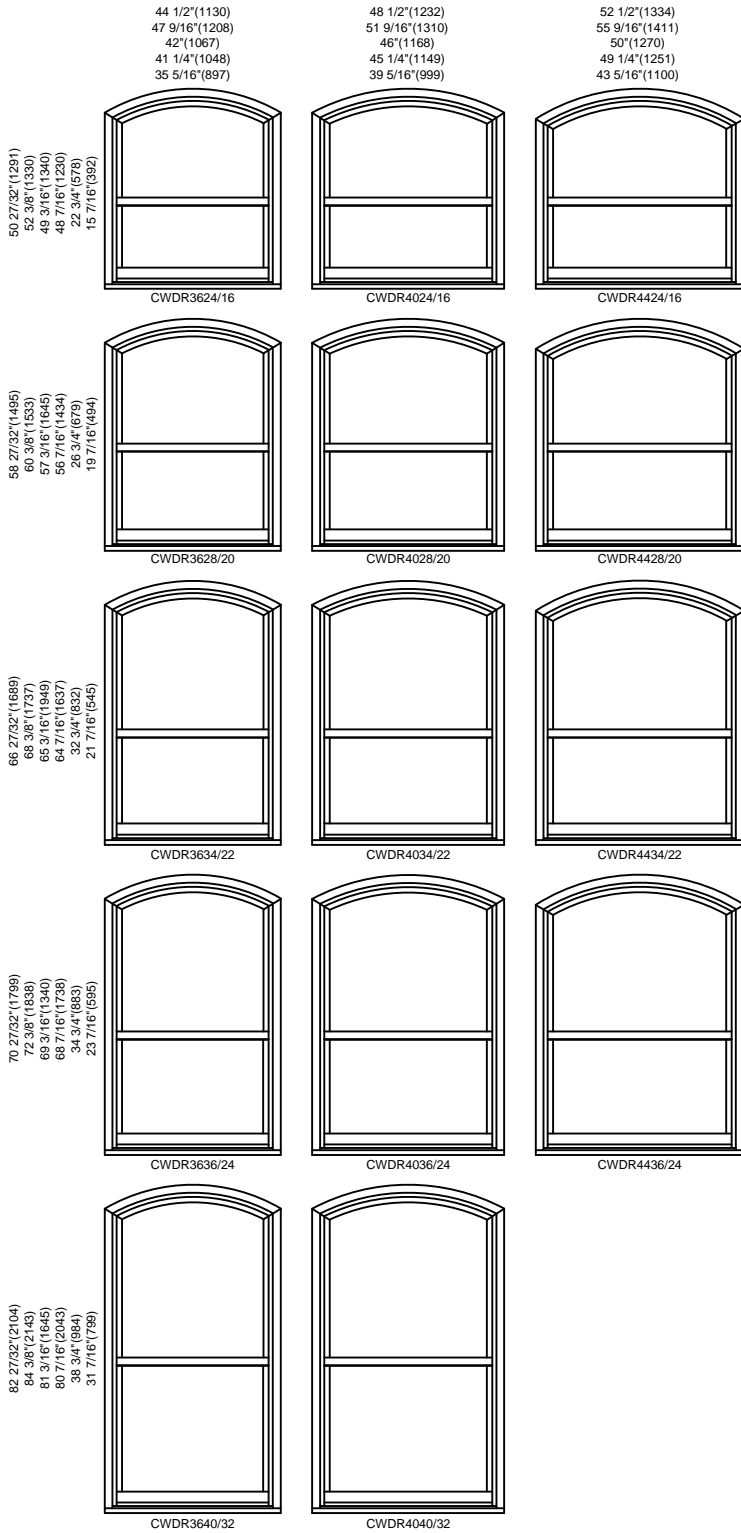

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- E: UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1: BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T: BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ##: NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ##+: NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS  
30° BAY WINDOW W/ 21" FLANKERS**

	66 3/16" (1681) 69 1/4" (1759) 63 11/16" (1618) 62 15/16" (1599) 15 7/16" (392)[2] 16 7/16" (418)	86 3/16" (2189) 89 1/4" (2267) 83 11/16" (2126) 82 15/16" (2107) 15 7/16" (392)[2] 35 7/16" (900)	94 3/16" (2392) 97 1/4" (2470) 91 11/16" (2329) 90 15/16" (2310) 15 7/16" (392)[2] 43 7/16" (1103)	98 3/16" (2494) 101 1/4" (2572) 95 11/16" (2430) 94 15/16" (2411) 15 7/16" (392)[2] 47 7/16" (1205)	106 3/16" (2697) 109 1/4" (2775) 103 11/16" (2634) 102 15/16" (2613) 15 7/16" (392)[2] 55 7/16" (1408)
MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING					
45 7/16" (1154) 47 1/16" (1194) 43 13/16" (1113) 43 1/16" (1094) 15 1/8" (384)[2] 32 3/8" (822)					
	CWD3Y2140-21	CWD3Y4140-21	CWD3Y4940-21	CWD3Y5340-21	CWD3Y6140-21
53 7/16" (1357) 55 (1387) 51 13/16" (1316) 51 1/16" (1297) 19 1/8" (486)[2] 40 3/8" (1026)					
	CWD3Y2148-21	CWD3Y4148-21	CWD3Y4948-21	CWD3Y5348-21	CWD3Y6148-21
61 7/16" (1560) 63 (1600) 59 13/16" (1519) 59 1/16" (1500) 23 1/8" (597)[2] 48 3/8" (1229)					
	CWD3Y2156-21	CWD3Y4156-21	CWD3Y4956-21	CWD3Y5356-21	CWD3Y6156-21
69 7/16" (1764) 71 (1803) 67 13/16" (1722) 67 1/16" (1703) 27 1/8" (689)[2] 56 3/8" (1432)					
	CWD3Y2164-21	CWD3Y4164-21	CWD3Y4964-21	CWD3Y5364-21	CWD3Y6164-21
73 7/16" (1865) 75 (1905) 71 13/16" (1824) 71 1/16" (1805) 29 1/16" (740)[2] 60 3/8" (1534)					
	CWD3Y2168-21	CWD3Y4168-21	CWD3Y4968-21	CWD3Y5368-21	CWD3Y6168-21





**ELEVATION SYMBOL LEGEND:**

- M.O. = MASONRY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- VALUES IN [ ] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ##\* NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" (12.7) from M.O. (Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS  
30° BAY WINDOW W/ 21" FLANKERS

MO BRICKMOLD	114 3/16"(2900)
MO FLAT CASING	117 1/4"(2978)
ROUGH OPENING	111 11/16"(2837)
FRAME SIZE	110 15/16"(2818)
DAYLIGHT OPENING	15 7/16"(392) [2]
	63 7/16"(1611)

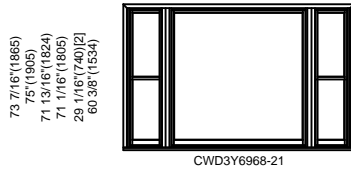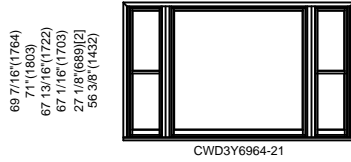

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- VALUES IN [ ] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ##\* NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**30° BAY WINDOW W/ 25" FLANKERS**

MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING

77 1/8"(1959)  
80 3/16"(2037)  
74 5/8"(1895)  
73 7/8"(1876)  
19 7/16"(494)[2]  
16 7/16"(418)


93 1/8"(2365)  
96 3/16"(2443)  
90 5/8"(2301)  
89 7/8"(2283)  
19 7/16"(494)[2]  
35 7/16"(900)

101 1/8"(2569)  
104 3/16"(2646)  
98 5/8"(2505)  
97 7/8"(2486)  
19 7/16"(494)[2]  
43 7/16"(1103)


105 1/8"(2670)  
108 3/16"(2748)  
102 5/8"(2607)  
101 7/8"(2588)  
19 7/16"(494)[2]  
47 7/16"(1205)

113 1/8"(2873)  
116 3/16"(2951)  
110 5/8"(2810)  
109 7/8"(2791)  
19 7/16"(494)[2]  
55 7/16"(1408)


45 7/16"(1154)  
47 1/16"(1194)  
43 13/16"(1113)  
43 1/16"(1094)  
15 1/8"(384)[2]  
32 3/8"(822)



CWD3Y2540-25



CWD3Y4140-25



CWD3Y4940-25




CWD3Y5340-25




CWD3Y6140-25


53 7/16"(1357)  
55 1/16"(1397)  
51 13/16"(1316)  
51 1/16"(1297)  
19 1/8"(486)[2]  
40 3/8"(1026)




CWD3Y2548-25




CWD3Y4148-25



CWD3Y4948-25




CWD3Y5348-25




CWD3Y6148-25


61 7/16"(1560)  
63 1/16"(1600)  
59 13/16"(1519)  
59 1/16"(1500)  
23 1/8"(587)[2]  
48 3/8"(1223)




CWD3Y2556-25




CWD3Y4156-25



CWD3Y4956-25




CWD3Y5356-25




CWD3Y6156-25


69 7/16"(1764)  
71 1/16"(1803)  
67 13/16"(1722)  
67 1/16"(1703)  
27 1/8"(689)[2]  
56 3/8"(1432)




CWD3Y2564-25




CWD3Y4164-25



CWD3Y4964-25




CWD3Y5364-25




CWD3Y6164-25


73 7/16"(1865)  
75 1/16"(1905)  
71 13/16"(1824)  
71 1/16"(1805)  
29 1/16"(740)[2]  
60 3/8"(1534)




CWD3Y2568-25




CWD3Y4168-25



CWD3Y4968-25



CWD3Y5368-25



CWD3Y6168-25






**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- VALUES IN [ ] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE, STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ##\* NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS  
30° BAY WINDOW W/ 25" FLANKERS

MO BRICKMOLD	121 1/8"(3077)
MO FLAT CASING	124 3/16"(3154)
ROUGH OPENING	118 5/8"(3013)
FRAME SIZE	117 7/8"(2994)
DAYLIGHT OPENING	19 7/16"(494)[2] 63 7/16"(1611)

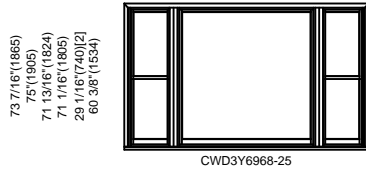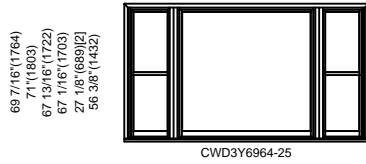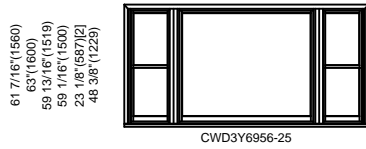

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORYN OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- VALUES IN [ ] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- # NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ##\* NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.



**ELEVATIONS**  
**30° BAY WINDOW W/ 29" FLANKERS**

MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING


88 1/16"(2237)  
91 1/8"(2315)  
85 9/16"(2173)  
84 13/16"(2154)  
23 7/16"(595)[2]  
24 7/16"(621)

100 1/16"(2542)  
103 1/8"(2619)  
97 9/16"(2478)  
96 13/16"(2459)  
23 7/16"(595)[2]  
35 7/16"(900)


108 1/16"(2745)  
111 1/8"(2823)  
105 9/16"(2681)  
104 13/16"(2662)  
23 7/16"(595)[2]  
43 7/16"(1103)

112 1/16"(2846)  
115 1/8"(2924)  
109 9/16"(2783)  
108 13/16"(2764)  
23 7/16"(595)[2]  
47 7/16"(1205)


45 7/16"(1154)  
47 1/8"(1194)  
43 13/16"(1113)  
43 1/16"(1094)  
15 1/8"(384)[2]  
32 3/8"(822)




CWD3Y2940-29



CWD3Y4140-29




CWD3Y4940-29




CWD3Y5340-29


53 7/16"(1357)  
55 1/8"(1397)  
51 13/16"(1316)  
51 1/16"(1287)  
19 1/8"(486)[2]  
40 3/8"(1026)




CWD3Y2948-29



CWD3Y4148-29



CWD3Y4948-29



CWD3Y5348-29

61 7/16"(1560)  
63 1/8"(1600)  
59 13/16"(1519)  
59 1/16"(1500)  
23 1/8"(587)[2]  
48 3/8"(1225)



CWD3Y2956-29



CWD3Y4156-29



CWD3Y4956-29



CWD3Y5356-29


69 7/16"(1764)  
71 1/8"(1803)  
67 13/16"(1722)  
67 1/16"(1703)  
27 1/8"(685)[2]  
56 3/8"(1432)




CWD3Y2964-29



CWD3Y4164-29



CWD3Y4964-29




CWD3Y5364-29

73 7/16"(1865)  
75 1/8"(1905)  
71 13/16"(1824)  
71 1/16"(1805)  
29 1/16"(740)[2]  
60 3/8"(1534)




CWD3Y2968-29



CWD3Y4168-29



CWD3Y4968-29



CWD3Y5368-29

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- VALUES IN [ ] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ##\* NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**30° BAY WINDOW W/ 29" FLANKERS**

MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING

120 1/16"(3050)  
123 1/8"(3127)  
117 9/16"(2986)  
116 13/16"(2967)  
23 7/16"(595)[2]  
55 7/16"(1408)

128 1/16"(3253)  
131 1/8"(3331)  
125 9/16"(3189)  
124 13/16"(3170)  
23 7/16"(595)[2]  
63 7/16"(1611)

45 7/16"(1154)  
47"(1194)  
43 13/16"(1113)  
43 1/16"(1094)  
15 1/8"(384)[2]  
32 3/8"(822)



CWD3Y6140-29



CWD3Y6940-29

53 7/16"(1357)  
55"(1397)  
51 13/16"(1316)  
51 1/16"(1297)  
19 1/8"(486)[2]  
40 3/8"(1026)




CWD3Y6148-29




CWD3Y6948-29

61 7/16"(1560)  
63"(1600)  
59 13/16"(1519)  
59 1/16"(1500)  
23 1/8"(592)[2]  
45 3/8"(1129)




CWD3Y6156-29




CWD3Y6956-29

69 7/16"(1764)  
71"(1803)  
67 13/16"(1722)  
67 1/16"(1703)  
27 1/8"(689)[2]  
56 3/8"(1432)




CWD3Y6164-29




CWD3Y6964-29

73 7/16"(1865)  
75"(1905)  
71 13/16"(1824)  
71 1/16"(1805)  
29 1/16"(740)[2]  
60 3/8"(1534)



CWD3Y6168-29



CWD3Y6968-29

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASONRY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- VALUES IN [ ] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ### NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
45° BAY WINDOW W/ 21" FLANKERS

MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING

60 1/16"(1526)  
63 1/8"(1603)  
57 9/16"(1462)  
56 13/16"(1443)  
15 7/16"(392)[2]  
16 7/16"(418)

80 1/16"(2034)  
83 1/8"(2111)  
77 9/16"(1970)  
76 13/16"(1951)  
15 7/16"(392)[2]  
35 7/16"(900)

88 1/16"(2237)  
91 1/8"(2315)  
85 9/16"(2173)  
84 13/16"(2154)  
15 7/16"(392)[2]  
43 7/16"(1103)


92 1/16"(2338)  
95 1/8"(2416)  
89 9/16"(2275)  
88 13/16"(2256)  
15 7/16"(392)[2]  
47 7/16"(1205)

100 1/16"(2542)  
103 1/8"(2619)  
97 9/16"(2478)  
96 13/16"(2459)  
15 7/16"(392)[2]  
55 7/16"(1408)


45 7/16"(1154)  
47 1/16"(1194)  
43 13/16"(1113)  
43 1/8"(1084)  
15 1/8"(384)[2]  
32 3/8"(822)




CWD4Y2140-21



CWD4Y4140-21



CWD4Y4940-21



CWD4Y5340-21




CWD4Y6140-21

53 7/16"(1357)  
55 1/8"(1397)  
51 13/16"(1316)  
51 1/16"(1297)  
19 1/8"(486)[2]  
40 3/8"(1026)



CWD4Y2148-21



CWD4Y4148-21



CWD4Y4948-21




CWD4Y5348-21




CWD4Y6148-21

61 7/16"(1560)  
63 1/8"(1600)  
59 13/16"(1519)  
59 1/16"(1500)  
23 1/8"(587)[2]  
48 3/8"(1229)



CWD4Y2156-21



CWD4Y4156-21



CWD4Y4956-21




CWD4Y5356-21



CWD4Y6156-21

69 7/16"(1764)  
71 1/8"(1803)  
67 13/16"(1722)  
67 1/16"(1703)  
27 1/8"(689)[2]  
56 3/8"(1432)



CWD4Y2164-21



CWD4Y4164-21



CWD4Y4964-21



CWD4Y5364-21



CWD4Y6164-21


73 7/16"(1865)  
75 1/8"(1905)  
71 13/16"(1824)  
71 1/16"(1805)  
29 1/16"(740)[2]  
60 3/8"(1534)




CWD4Y2168-21




CWD4Y4168-21



CWD4Y4968-21



CWD4Y5368-21



CWD4Y6168-21

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- VALUES IN [ ] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ### NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**45° BAY WINDOW W/ 21" FLANKERS**

MO BRICKMOLD	108 1/16"(2745)
MO FLAT CASING	111 1/8"(2823)
ROUGH OPENING	105 9/16"(2681)
FRAME SIZE	104 13/16"(2662)
DAYLIGHT OPENING	15 7/16"(392)[2]
	63 7/16"(1611)

45 7/16"(1154)  
47"(1194)  
43 13/16"(1113)  
43 1/16"(1094)  
15 1/8"(384)[2]  
32 3/8"(822)




CWD4Y6940-21

53 7/16"(1357)  
55"(1397)  
51 13/16"(1316)  
51 1/16"(1297)  
19 1/8"(486)[2]  
40 3/8"(1026)




CWD4Y6948-21

61 7/16"(1560)  
63"(1600)  
59 13/16"(1519)  
59 1/16"(1500)  
23 1/8"(587)[2]  
48 3/8"(1229)




CWD4Y6956-21

69 7/16"(1764)  
71"(1803)  
67 13/16"(1722)  
67 1/16"(1703)  
27 1/8"(689)[2]  
56 3/8"(1432)



CWD4Y6964-21

73 7/16"(1865)  
75"(1905)  
71 13/16"(1824)  
71 1/16"(1805)  
29 1/16"(740)[2]  
60 3/8"(1534)



CWD4Y6968-21

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- VALUES IN [ ] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE, STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ##\* NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**45° BAY WINDOW W/ 25" FLANKERS**

	69 3/4"(1772)	85 3/4"(2178)	93 3/4"(2381)	97 3/4"(2483)	105 3/4"(2686)
MO BRICKMOLD	72 13/16"(1849)	88 13/16"(2256)	96 13/16"(2459)	100 13/16"(2561)	108 13/16"(2764)
MO FLAT CASING	67 1/4"(1708)	83 1/4"(2115)	91 1/4"(2318)	95 1/4"(2419)	103 1/4"(2623)
ROUGH OPENING	66 1/2"(1689)	82 1/2"(2063)	90 1/2"(2299)	94 1/2"(2400)	102 1/2"(2604)
FRAME SIZE	19 7/16"(494)2]	19 7/16"(494)2]	19 7/16"(494)2]	19 7/16"(494)2]	19 7/16"(494)2]
DAYLIGHT OPENING	20 7/16"(519)	35 7/16"(900)	43 7/16"(1103)	47 7/16"(1205)	55 7/16"(1408)
45 7/16"(1154)					
43 13/16"(1094)	CWD4Y2540-25	CWD4Y4140-25	CWD4Y4940-25	CWD4Y5340-25	CWD4Y6140-25
43 13/16"(1094)					
43 13/16"(1094)	CWD4Y2548-25	CWD4Y4148-25	CWD4Y4948-25	CWD4Y5348-25	CWD4Y6148-25
43 13/16"(1094)					
43 13/16"(1094)	CWD4Y2556-25	CWD4Y4156-25	CWD4Y4956-25	CWD4Y5356-25	CWD4Y6156-25
43 13/16"(1094)					
43 13/16"(1094)	CWD4Y2564-25	CWD4Y4164-25	CWD4Y4964-25	CWD4Y5364-25	CWD4Y6164-25
43 13/16"(1094)					
43 13/16"(1094)	CWD4Y2568-25	CWD4Y4168-25	CWD4Y4968-25	CWD4Y5368-25	CWD4Y6168-25

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- VALUES IN [ ] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- # NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ## NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS  
45° BAY WINDOW W/ 25" FLANKERS

MO BRICKMOLD	113 3/4"(2889)
MO FLAT CASING	116 13/16"(2967)
ROUGH OPENING	111 1/4"(2856)
FRAME SIZE	110 1/2"(2807)
DAYLIGHT OPENING	19 7/16"(494)[2]
	63 7/16"(1611)

45 7/16"(1154)  
47"(1194)  
43 13/16"(1113)  
43 1/16"(1094)  
15 1/8"(384)[2]  
32 3/8"(822)



CWD4Y6940-25

53 7/16"(1357)  
55"(1397)  
51 13/16"(1316)  
51 1/16"(1297)  
19 1/8"(486)[2]  
40 3/8"(1026)




CWD4Y6948-25

61 7/16"(1560)  
63"(1600)  
59 13/16"(1519)  
59 1/16"(1500)  
23 1/8"(587)[2]  
48 3/8"(1229)




CWD4Y6956-25

69 7/16"(1764)  
71"(1803)  
67 13/16"(1722)  
67 1/16"(1703)  
27 1/8"(689)[2]  
56 3/8"(1432)



CWD4Y6964-25

73 7/16"(1865)  
75"(1905)  
71 13/16"(1824)  
71 1/16"(1805)  
29 1/16"(740)[2]  
60 3/8"(1534)



CWD4Y6968-25

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- VALUES IN [ ] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ##\* NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**45° BAY WINDOW W/ 29" FLANKERS**

MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING

79 3/8"(2016)  
82 7/16"(2094)  
77 7/8"(1978)  
76 1/8"(1934)  
23 7/16"(595)[2]  
24 7/16"(621)

91 3/8"(2321)  
94 7/16"(2399)  
89 7/8"(2283)  
88 1/8"(2238)  
23 7/16"(595)[2]  
35 7/16"(900)


99 3/8"(2524)  
102 7/16"(2602)  
97 7/8"(2486)  
96 1/8"(2442)  
23 7/16"(595)[2]  
43 7/16"(1103)

103 3/8"(2626)  
106 7/16"(2704)  
101 7/8"(2588)  
100 1/8"(2543)  
23 7/16"(595)[2]  
47 7/16"(1205)


45 7/16"(1154)  
47"(1194)  
43 13/16"(1113)  
43 1/16"(1094)  
15 1/8"(384)[2]  
32 3/8"(822)




CWD4Y2940-29



CWD4Y4140-29




CWD4Y4940-29




CWD4Y5340-29


53 7/16"(1357)  
55"(1397)  
51 13/16"(1316)  
51 1/16"(1297)  
19 1/8"(486)[2]  
40 3/8"(1026)




CWD4Y2948-29



CWD4Y4148-29




CWD4Y4948-29




CWD4Y5348-29


61 7/16"(1560)  
63"(1600)  
59 13/16"(1519)  
59 1/16"(1500)  
23 1/8"(587)[2]  
48 3/8"(1229)




CWD4Y2956-29



CWD4Y4156-29




CWD4Y4956-29




CWD4Y5356-29


69 7/16"(1764)  
71"(1803)  
67 13/16"(1722)  
67 1/16"(1703)  
27 1/8"(689)[2]  
56 3/8"(1432)




CWD4Y2964-29



CWD4Y4164-29




CWD4Y4964-29



CWD4Y5364-29


73 7/16"(1865)  
75"(1905)  
71 13/16"(1824)  
71 1/16"(1805)  
29 1/16"(740)[2]  
60 3/8"(1534)




CWD4Y2968-29



CWD4Y4168-29



CWD4Y4968-29



CWD4Y5368-29

**ELEVATION SYMBOL LEGEND:**

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- VALUES IN [ ] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ##\* NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS  
45° BAY WINDOW W/ 29" FLANKERS

MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING

111 3/8"(2829)  
114 7/16"(2907)  
109 7/8"(2791)  
108 1/8"(2746)  
23 7/16"(595)[2]  
55 7/16"(1408)

119 3/8"(3032)  
122 7/16"(3109)  
117 7/8"(2994)  
116 1/8"(2950)  
23 7/16"(595)[2]  
63 7/16"(1611)

45 7/16"(1154)  
47"(1194)  
43 13/16"(1113)  
43 1/16"(1094)  
15 1/8"(384)[2]  
32 3/8"(822)



CWD4Y6140-29



CWD4Y6940-29

53 7/16"(1357)  
55"(1397)  
51 13/16"(1316)  
51 1/16"(1297)  
19 1/8"(486)[2]  
40 3/8"(1026)




CWD4Y6148-29




CWD4Y6948-29

61 7/16"(1560)  
63"(1600)  
59 13/16"(1519)  
59 1/16"(1500)  
23 1/8"(587)[2]  
48 3/8"(1229)




CWD4Y6156-29




CWD4Y6956-29

69 7/16"(1764)  
71"(1803)  
67 13/16"(1722)  
67 1/16"(1703)  
27 1/8"(689)[2]  
56 3/8"(1432)




CWD4Y6164-29




CWD4Y6964-29

73 7/16"(1865)  
75"(1905)  
71 13/16"(1824)  
71 1/16"(1805)  
29 1/16"(740)[2]  
60 3/8"(1534)



CWD4Y6168-29



CWD4Y6968-29

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS
- VALUES IN [ ] ARE NUMBER OF DAYLIGHT OPENINGS PER UNIT
- E UNIT MEETS EGRESS REQUIREMENT FOR IRC CODE. STATE AND LOCAL EGRESS CODES MAY DIFFER. ALWAYS REFER TO LOCAL BUILDING CODES FOR COMPLETE REQUIREMENTS. CHECK WITH LOCAL OFFICIALS TO ENSURE COMPLIANCE BEFORE INSTALLING THE UNIT.
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS.
- T BASIC UNIT IS NOT AVAILABLE WITH TRI-PANE GLASS.
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLASS.
- ##\* NUMBER INDICATES HIGHER DP RATING, TALLER SILL STOP AND IMPACT GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.