

---

ELEVATIONS TABLE OF CONTENTS

---

2-Wide Units .....	14-16
3-Wide Units .....	14-17

**CUSTOM WOOD WINDOWS**  
**CUSTOM HORIZONTAL GLIDER**

**ELEVATIONS**  
**2-WIDE UNITS**

M.O. Brickmould  
M.O. Adams/Flat Casing  
Rough Opening  
Frame Size  
Daylight Opening


38 5/8" (981)  
41 5/8" (1057)  
36 1/4" (921)  
35 1/2" (902)  
14" (346) [2]

50 5/8" (1286)  
53 5/8" (1362)  
48 1/4" (1226)  
47 1/2" (1207)  
20" (508) [2]


62 5/8" (1590)  
65 5/8" (1667)  
60 1/4" (1531)  
59 1/2" (1511)  
26" (660) [2]

74 5/8" (1895)  
77 5/8" (1972)  
72 1/4" (1835)  
71 1/2" (1816)  
32" (813) [2]


25 11/16" (652)  
27 3/16" (691)  
24 1/4" (616)  
23 1/2" (597)  
16 7/8" (429)




CWSL3523



CWSL4223




CWSL5923




CWSL7123


37 11/16" (957)  
39 3/16" (995)  
36 1/4" (921)  
35 1/2" (903)  
28 7/8" (733)




CWSL3535



CWSL4735




CWSL5935




CWSL7135


43 1/16" (1110)  
45 3/16" (1148)  
42 1/4" (1073)  
41 1/2" (1054)  
34 7/8" (886)




CWSL3541



CWSL4741




CWSL5941




CWSL7141


49 11/16" (1262)  
51 3/16" (1300)  
48 1/4" (1226)  
47 1/2" (1207)  
40 7/8" (1038)




CWSL3547



CWSL4747




CWSL5947




CWSL7147


61 11/16" (1567)  
63 3/16" (1605)  
60 1/4" (1530)  
59 1/2" (1511)  
52 7/8" (1343)




CWSL3559



CWSL4759



CWSL5959



CWSL7159

**ELEVATION SYMBOL LEGEND:**

M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS  
VALUES IN [ ] ARE NUMBER OF DAYLIGHT OPENINGS PER PANEL  
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT FOR SECOND FLOOR AND ABOVE EGRESS.  
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT FOR FIRST FLOOR EGRESS.  
## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING


Note: Elevations shown DO NOT have exterior trim. Subtract 1/2" (12.7) from M.O. (Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS  
3-WIDE UNITS**

M.O. Brickmould  
M.O. Adams/Flat Casing  
Rough Opening  
Frame Size  
Daylight Opening


98 5/8" (2505)  
101 5/8" (2581)  
96 1/4" (2445)  
95 1/2" (2426)  
20" (508) [2]  
46 1/16" (1170)

49 11/16" (1262)  
51 3/16" (1300)  
48 1/4" (1226)  
47 1/2" (1207)  
40 7/8" (1038)

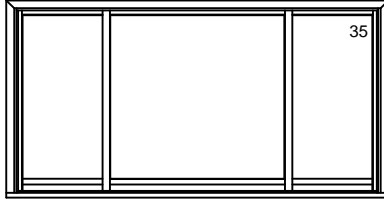

CWSL9547-3

61 11/16" (1567)  
63 3/16" (1605)  
60 1/4" (1530)  
59 1/2" (1511)  
52 7/8" (1343)

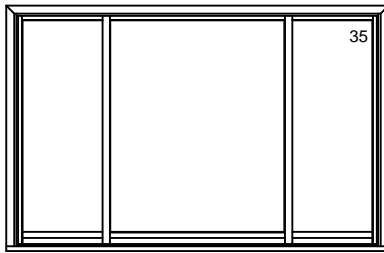

CWSL9559-3

**ELEVATION SYMBOL LEGEND:**

M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS  
VALUES IN [ ] ARE NUMBER OF DAYLIGHT OPENINGS PER PANEL  
E: BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT FOR SECOND FLOOR AND ABOVE EGRESS.  
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT FOR FIRST FLOOR EGRESS.  
## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.