
ELEVATIONS TABLE OF CONTENTS

| | |
|-----------------------|------|
| Operating Units | 2-15 |
| Fixed Units | 2-22 |
| 2-Wide Units | 2-27 |
| 3-Wide Units | 2-29 |

ELEVATIONS
OPERATING UNITS

| | 27 1/4"(692) | 31 1/4"(794) | 33 1/4"(845) | 35 1/4"(895) | 39 1/4"(997) | 43 1/4"(1099) |
|------------------|---------------|---------------|---------------|---------------|----------------|----------------|
| MO BRICKMOLD | 27 1/4"(692) | 31 1/4"(794) | 33 1/4"(845) | 35 1/4"(895) | 39 1/4"(997) | 43 1/4"(1099) |
| MO FLAT CASING | 30 5/16"(770) | 34 5/16"(872) | 36 5/16"(922) | 38 5/16"(973) | 42 5/16"(1075) | 46 5/16"(1176) |
| ROUGH OPENING | 24 3/4"(629) | 28 3/4"(730) | 30 3/4"(781) | 32 3/4"(832) | 36 3/4"(933) | 40 3/4"(1035) |
| FRAME SIZE | 24"(610) | 28"(711) | 30"(762) | 32"(813) | 36"(914) | 40"(1016) |
| DAYLIGHT OPENING | 15 9/16"(395) | 19 9/16"(497) | 21 9/16"(547) | 23 9/16"(598) | 27 9/16"(700) | 31 9/16"(802) |
| 20 13/16"(529) | | | | | | |
| 23 3/8"(594) | CWTTTC2418 | CWTTTC2818 | CWTTTC3018 | CWTTTC3218 | CWTTTC3618 | CWTTTC4018 |
| 18 3/4"(476) | | | | | | |
| 18"(457) | CWTTTC2420 | CWTTTC2820 | CWTTTC3020 | CWTTTC3220 | CWTTTC3620 | CWTTTC4020 |
| 9 9/16"(243) | | | | | | |
| 22 13/16"(579) | CWTTTC2424 | CWTTTC2824 | CWTTTC3024 | CWTTTC3224 | CWTTTC3624 | CWTTTC4024 |
| 25 3/8"(645) | | | | | | |
| 20 3/4"(527) | CWTTTC2430 | CWTTTC2830 | CWTTTC3030 | CWTTTC3230 | CWTTTC3630 | CWTTTC4030 |
| 20"(508) | | | | | | |
| 11 9/16"(294) | CWTTTC2432 | CWTTTC2832 | CWTTTC3032 | CWTTTC3232 | CWTTTC3632 | CWTTTC4032 |
| 26 13/16"(681) | | | | | | |
| 29 3/8"(748) | CWTTTC2436 | CWTTTC2836 | CWTTTC3036 | CWTTTC3236 | CWTTTC3636 | CWTTTC4036 |
| 24 3/4"(629) | | | | | | |
| 24"(610) | CWTTTC2440 | CWTTTC2840 | CWTTTC3040 | CWTTTC3240 | CWTTTC3640 | CWTTTC4040 |
| 15 9/16"(395) | | | | | | |
| 32 13/16"(833) | CWTTTC2442 | CWTTTC2842 | CWTTTC3042 | CWTTTC3242 | CWTTTC3642 | CWTTTC4042 |
| 35 3/8"(899) | | | | | | |
| 30 3/4"(781) | CWTTTC2444 | CWTTTC2844 | CWTTTC3044 | CWTTTC3244 | CWTTTC3644 | CWTTTC4044 |
| 30"(762) | | | | | | |
| 21 9/16"(547) | CWTTTC2446 | CWTTTC2846 | CWTTTC3046 | CWTTTC3246 | CWTTTC3646 | CWTTTC4046 |
| 34 13/16"(884) | | | | | | |
| 37 3/8"(949) | CWTTTC2448 | CWTTTC2848 | CWTTTC3048 | CWTTTC3248 | CWTTTC3648 | CWTTTC4048 |
| 32 3/4"(832) | | | | | | |
| 32"(813) | CWTTTC2450 | CWTTTC2850 | CWTTTC3050 | CWTTTC3250 | CWTTTC3650 | CWTTTC4050 |
| 23 9/16"(598) | | | | | | |
| 38 13/16"(986) | CWTTTC2452 | CWTTTC2852 | CWTTTC3052 | CWTTTC3252 | CWTTTC3652 | CWTTTC4052 |
| 41 3/8"(1051) | | | | | | |
| 36 3/4"(933) | CWTTTC2454 | CWTTTC2854 | CWTTTC3054 | CWTTTC3254 | CWTTTC3654 | CWTTTC4054 |
| 36"(914) | | | | | | |
| 27 9/16"(700) | CWTTTC2456 | CWTTTC2856 | CWTTTC3056 | CWTTTC3256 | CWTTTC3656 | CWTTTC4056 |
| 42 13/16"(1087) | | | | | | |
| 45 3/8"(1153) | CWTTTC2458 | CWTTTC2858 | CWTTTC3058 | CWTTTC3258 | CWTTTC3658 | CWTTTC4058 |
| 40 3/4"(1035) | | | | | | |
| 40"(1016) | CWTTTC2460 | CWTTTC2860 | CWTTTC3060 | CWTTTC3260 | CWTTTC3660 | CWTTTC4060 |
| 31 9/16"(802) | | | | | | |
| 44 13/16"(1138) | CWTTTC2462 | CWTTTC2862 | CWTTTC3062 | CWTTTC3262 | CWTTTC3662 | CWTTTC4062 |
| 47 3/8"(1203) | | | | | | |
| 42 3/4"(1086) | CWTTTC2464 | CWTTTC2864 | CWTTTC3064 | CWTTTC3264 | CWTTTC3664 | CWTTTC4064 |
| 42"(1067) | | | | | | |
| 33 9/16"(852) | CWTTTC2466 | CWTTTC2866 | CWTTTC3066 | CWTTTC3266 | CWTTTC3666 | CWTTTC4066 |

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E* BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- ** BASIC UNIT REQUIRES LIMIT DEVICE ON SASH WHEN OPERATING
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING
- * AVAILABLE ONLY AS A STATIONARY WINDOW

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
OPERATING UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

27 1/4"(692)
30 5/16"(770)
24 3/4"(629)
24"(610)
15 9/16"(395)

31 1/4"(794)
34 5/16"(872)
28 3/4"(730)
28"(711)
19 9/16"(497)


33 1/4"(845)
36 5/16"(922)
30 3/4"(781)
30"(762)
21 9/16"(547)

35 1/4"(895)
38 5/16"(973)
32 3/4"(832)
32"(813)
23 9/16"(598)


39 1/4"(997)
42 5/16"(1075)
36 3/4"(933)
36"(914)
27 9/16"(700)

43 1/4"(1099)
46 5/16"(1176)
40 3/4"(1035)
40"(1016)
31 9/16"(802)


50 13/16"(1291)
53 3/8"(1356)
48 3/4"(1238)
48"(1219)
39 9/16"(1005)




CWTTTC2448




CWTTTC2848




CWTTTC3048



CWTTTC3248




CWTTTC3648




CWTTTC4048


56 13/16"(1443)
59 3/8"(1508)
54 3/4"(1391)
54"(1372)
45 9/16"(1157)




CWTTTC2454




CWTTTC2854




CWTTTC3054



CWTTTC3254




CWTTTC3654




CWTTTC4054


58 13/16"(1494)
61 3/8"(1559)
56 3/4"(1441)
56"(1422)
47 9/16"(1208)




CWTTTC2456




CWTTTC2856




CWTTTC3056



CWTTTC3256




CWTTTC3656




CWTTTC4056


62 13/16"(1595)
65 3/8"(1661)
60 3/4"(1543)
60"(1524)
51 9/16"(1310)




CWTTTC2460




CWTTTC2860




CWTTTC3060



CWTTTC3260




CWTTTC3660




CWTTTC4060


66 13/16"(1697)
69 3/8"(1762)
64 3/4"(1645)
64"(1626)
55 9/16"(1411)




CWTTTC2464




CWTTTC2864




CWTTTC3064



CWTTTC3264



CWTTTC3664



CWTTTC4064

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E* BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- ** BASIC UNIT REQUIRES LIMIT DEVICE ON SASH WHEN OPERATING
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING
- * AVAILABLE ONLY AS A STATIONARY WINDOW

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O. (Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
OPERATING UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

27 1/4"(692)
30 5/16"(770)
24 3/4"(629)
24"(610)
15 9/16"(395)

31 1/4"(794)
34 5/16"(872)
28 3/4"(730)
28"(711)
19 9/16"(497)


33 1/4"(845)
36 5/16"(922)
30 3/4"(781)
30"(762)
21 9/16"(547)

35 1/4"(895)
38 5/16"(973)
32 3/4"(832)
32"(813)
23 9/16"(598)


39 1/4"(997)
42 5/16"(1075)
36 3/4"(933)
36"(914)
27 9/16"(700)

43 1/4"(1099)
46 5/16"(1176)
40 3/4"(1035)
40"(1016)
31 9/16"(802)

68 13/16"(1748)
71 3/8"(1813)
68 3/4"(1695)
66"(1676)
57 9/16"(1462)




CWTTTC2466




CWTTTC2866




CWTTTC3066



CWTTTC3266




CWTTTC3666




CWTTTC4066

74 13/16"(1900)
77 3/8"(1965)
72 3/4"(1848)
77"(1829)
63 9/16"(1614)




CWTTTC2472




CWTTTC2872




CWTTTC3072



CWTTTC3272




CWTTTC3672




CWTTTC4072

86 13/16"(2205)
89 3/8"(2270)
84 3/4"(2153)
84"(2134)
75 9/16"(1919)




CWTTTC2484




CWTTTC2884




CWTTTC3084



CWTTTC3284



CWTTTC3684



CWTTTC4084

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E* BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- ** BASIC UNIT REQUIRES LIMIT DEVICE ON SASH WHEN OPERATING
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING
- * AVAILABLE ONLY AS A STATIONARY WINDOW

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
OPERATING UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

45 1/4"(1149)
48 5/16"(1227)
42 3/4"(1086)
42"(1067)
33 9/16"(852)

51 1/4"(1302)
54 5/16"(1380)
48 3/4"(1238)
48"(1219)
39 9/16"(1005)

20 13/16"(529)
23 3/8"(594)
18 3/4"(476)
18"(457)
9 9/16"(243)



CWTTTC4218



CWTTTC4818

22 13/16"(579)
25 3/8"(645)
20 3/4"(527)
20"(508)
11 9/16"(294)



CWTTTC4220



CWTTTC4820

26 13/16"(681)
29 3/8"(746)
24 3/4"(629)
24"(610)
15 9/16"(395)



CWTTTC4224



CWTTTC4824

32 13/16"(833)
35 3/8"(899)
30 3/4"(781)
30"(762)
21 9/16"(547)




CWTTTC4230




CWTTTC4830

34 13/16"(884)
37 3/8"(949)
32 3/4"(832)
32"(813)
23 9/16"(598)




CWTTTC4232




CWTTTC4832

38 13/16"(986)
41 3/8"(1051)
36 3/4"(933)
36"(914)
27 9/16"(700)



CWTTTC4236



CWTTTC4836

42 13/16"(1087)
45 3/8"(1153)
40 3/4"(1035)
40"(1016)
31 9/16"(802)



CWTTTC4240



CWTTTC4840

44 13/16"(1138)
47 3/8"(1203)
42 3/4"(1086)
42"(1067)
33 9/16"(852)



CWTTTC4242




CWTTTC4842

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


45 1/4"(1149)
48 5/16"(1227)
42 3/4"(1086)
42"(1067)
33 9/16"(852)

51 1/4"(1302)
54 5/16"(1380)
48 3/4"(1238)
48"(1219)
39 9/16"(1005)

50 13/16"(1291)
53 3/8"(1356)
48 3/4"(1238)
48"(1219)
39 9/16"(1005)




CWTTTC4248




CWTTTC4848

56 13/16"(1443)
59 3/8"(1508)
54 3/4"(1391)
54"(1372)
45 9/16"(1157)




CWTTTC4254




CWTTTC4854

58 13/16"(1494)
61 3/8"(1559)
56 3/4"(1441)
56"(1422)
47 9/16"(1208)




CWTTTC4256




CWTTTC4856

62 13/16"(1595)
65 3/8"(1661)
60 3/4"(1543)
60"(1524)
51 9/16"(1310)




CWTTTC4260




CWTTTC4860

66 13/16"(1697)
69 3/8"(1762)
64 3/4"(1645)
64"(1626)
55 9/16"(1411)



CWTTTC4264



CWTTTC4864

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E* BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- ** BASIC UNIT REQUIRES LIMIT DEVICE ON SASH WHEN OPERATING
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING
- * AVAILABLE ONLY AS A STATIONARY WINDOW

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


ELEVATIONS
OPERATING UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


45 1/4"(1149)
48 5/16"(1227)
42 3/4"(1086)
42"(1067)
33 9/16"(852)

51 1/4"(1302)
54 5/16"(1380)
48 3/4"(1238)
48"(1219)
39 9/16"(1005)

68 13/16"(1748)
71 3/8"(1813)
66 3/4"(1685)
66"(1676)
57 9/16"(1462)




CWTTTC4266




CWTTTC4866

74 13/16"(1900)
77 3/8"(1965)
72 3/4"(1848)
72"(1829)
63 9/16"(1614)




CWTTTC4272




CWTTTC4872

86 13/16"(2205)
89 3/8"(2270)
84 3/4"(2153)
84"(2134)
75 9/16"(1919)



CWTTTC4284











CWTTTC4884






ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- ** BASIC UNIT REQUIRES LIMIT DEVICE ON SASH WHEN OPERATING
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING
- * AVAILABLE ONLY AS A STATIONARY WINDOW

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
OPERATING UNITS

| | | |
|---|---|---|
| MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING | 63 1/4"(1607) 66 5/16"(1118) 60 3/4"(1543) 60"(1524) 51 9/16"(1310) |  |
| | | CWTTC6018 |
| | |  |
| | | CWTTC6020 |
| | |  |
| | | CWTTC6024 |
| | |  |
| | | CWTTC6030 |
| | |  |
| | | CWTTC6032 |
| | |  |
| | | CWTTC6036 |
| | |  |
| | | CWTTC6040 |
| | |  |
| | | CWTTC6042 |

| | | |
|---|---|--|
| MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING | 63 1/4"(1607) 66 5/16"(1118) 60 3/4"(1543) 60"(1524) 51 9/16"(1310) |  |
| | | CWTTC6048 |
| | |  |
| | | CWTTC6054 |
| | |  |
| | | CWTTC6056 |
| | |  |
| | | CWTTC6060 |
| | |  |
| | | CWTTC6064 |

ELEVATION SYMBOL LEGEND:


- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E* BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E** BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- ** BASIC UNIT REQUIRES LIMIT DEVICE ON SASH WHEN OPERATING
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING
- * AVAILABLE ONLY AS A STATIONARY WINDOW

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
OPERATING UNITS


MO BRICKMOLD 63 1/4"(1607)
MO FLAT CASING 66 5/16"(1118)
ROUGH OPENING 60 3/4"(1543)
FRAME SIZE 60"(1524)
DAYLIGHT OPENING 51 9/16"(1310)

68 13/16"(1748)
71 3/8"(1813)
66 3/4"(1695)
66"(1676)
57 9/16"(1462)



CWTT6066

74 13/16"(1900)
77 3/8"(1965)
72 3/4"(1848)
72"(1829)
63 9/16"(1614)



CWTT6072

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- E* BASIC UNIT CLEAR OPENING REQUIRES EGRESS HINGES TO EXCEED 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- ** BASIC UNIT REQUIRES LIMIT DEVICE ON SASH WHEN OPERATING
- ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING
- * AVAILABLE ONLY AS A STATIONARY WINDOW

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
FIXED UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

43 1/4"(1099)
46 5/16"(1176)
40 3/4"(1035)
40"(1016)
31 9/16"(802)

45 1/4"(1149)
48 5/16"(1227)
42 3/4"(1086)
42"(1067)
33 9/16"(852)

51 1/4"(1302)
54 5/16"(1380)
48 3/4"(1238)
48"(1219)
39 9/16"(1005)

57 1/4"(1454)
60 5/16"(1532)
54 3/4"(1391)
54"(1372)
45 9/16"(1157)

59 1/4"(1505)
62 5/16"(1583)
56 3/4"(1441)
56"(1422)
47 9/16"(1208)

| | | | | | |
|---|-----------|-----------|-----------|-----------|--|
| 20 13/16"(529) 23 3/8"(594) 18 3/4"(476) 18"(457) 9 9/16"(243) | | | | | |
| CWTTP4018 | CWTTP4218 | CWTTP4818 | CWTTP5418 | CWTTP5618 | |
| 22 13/16"(579) 25 3/8"(645) 20 3/4"(527) 20"(508) 11 9/16"(294) | | | | | |
| CWTTP4020 | CWTTP4220 | CWTTP4820 | CWTTP5420 | CWTTP5620 | |
| 26 13/16"(661) 29 3/8"(746) 24 3/4"(629) 24"(610) 15 9/16"(395) | | | | | |
| CWTTP4024 | CWTTP4224 | CWTTP4824 | CWTTP5424 | CWTTP5624 | |
| 32 13/16"(833) 35 3/8"(899) 30 3/4"(781) 30"(762) 21 9/16"(547) | | | | | |
| CWTTP4030 | CWTTP4230 | CWTTP4830 | CWTTP5430 | CWTTP5630 | |
| 34 13/16"(884) 37 3/8"(949) 32 3/4"(832) 32"(813) 23 9/16"(598) | | | | | |
| CWTTP4032 | CWTTP4232 | CWTTP4832 | CWTTP5432 | CWTTP5632 | |
| 38 13/16"(966) 41 3/8"(1051) 36 3/4"(933) 36"(914) 27 9/16"(700) | | | | | |
| CWTTP4036 | CWTTP4236 | CWTTP4836 | CWTTP5436 | CWTTP5636 | |
| 42 13/16"(1087) 45 3/8"(1153) 40 3/4"(1035) 40"(1016) 31 9/16"(802) | | | | | |
| CWTTP4040 | CWTTP4240 | CWTTP4840 | CWTTP5440 | CWTTP5640 | |
| 44 13/16"(1138) 47 3/8"(1203) 42 3/4"(1086) 42"(1067) 33 9/16"(852) | | | | | |
| CWTTP4042 | CWTTP4242 | CWTTP4842 | CWTTP5442 | CWTTP5642 | |

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
FIXED UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

43 1/4"(1099)
46 5/16"(1176)
40 3/4"(1035)
40"(1016)
31 9/16"(802)


45 1/4"(1149)
48 5/16"(1227)
42 3/4"(1086)
42"(1067)
33 9/16"(852)

51 1/4"(1302)
54 5/16"(1380)
48 3/4"(1238)
48"(1219)
39 9/16"(1005)


57 1/4"(1454)
60 5/16"(1532)
54 3/4"(1391)
54"(1372)
45 9/16"(1157)

59 1/4"(1505)
62 5/16"(1583)
56 3/4"(1441)
56"(1422)
47 9/16"(1208)


50 13/16"(1291)
53 3/8"(1356)
48 3/4"(1238)
48"(1219)
39 9/16"(1005)




CWTTP4048




CWTTP4248



CWTTP4848




CWTTP5448




CWTTP5648


56 13/16"(1443)
59 3/8"(1508)
54 3/4"(1391)
54"(1372)
45 9/16"(1157)




CWTTP4054




CWTTP4254



CWTTP4854




CWTTP5454




CWTTP5654


58 13/16"(1494)
61 3/8"(1559)
56 3/4"(1441)
56"(1422)
47 9/16"(1208)




CWTTP4056




CWTTP4256



CWTTP4856




CWTTP5456




CWTTP5656


62 13/16"(1595)
65 3/8"(1661)
60 3/4"(1543)
60"(1524)
51 9/16"(1310)




CWTTP4060




CWTTP4260



CWTTP4860




CWTTP5460




CWTTP5660


66 13/16"(1697)
69 3/8"(1762)
64 3/4"(1645)
64"(1626)
55 9/16"(1411)




CWTTP4064




CWTTP4264



CWTTP4864



CWTTP5464



CWTTP5664

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
FIXED UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

43 1/4"(1099)
46 5/16"(1176)
40 3/4"(1035)
40"(1016)
31 9/16"(802)


45 1/4"(1149)
48 5/16"(1227)
42 3/4"(1086)
42"(1067)
33 9/16"(852)

51 1/4"(1302)
54 5/16"(1380)
48 3/4"(1238)
48"(1219)
39 9/16"(1005)


57 1/4"(1454)
60 5/16"(1532)
54 3/4"(1391)
54"(1372)
45 9/16"(1157)

59 1/4"(1505)
62 5/16"(1583)
56 3/4"(1441)
56"(1422)
47 9/16"(1208)


68 13/16"(1748)
71 3/8"(1813)
66 3/4"(1695)
66"(1676)
57 9/16"(1462)




CWTTP4066




CWTTP4266



CWTTP4866




CWTTP5466




CWTTP5666


74 13/16"(1900)
77 3/8"(1965)
72 3/4"(1848)
72"(1829)
63 9/16"(1614)




CWTTP4072




CWTTP4272



CWTTP4872




CWTTP5472




CWTTP5672


86 13/16"(2205)
89 3/8"(2270)
84 3/4"(2153)
84"(2134)
75 9/16"(1919)




CWTTP4084




CWTTP4284



CWTTP4884

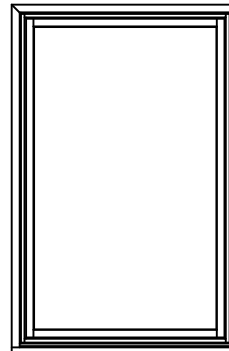

CWTTP5484

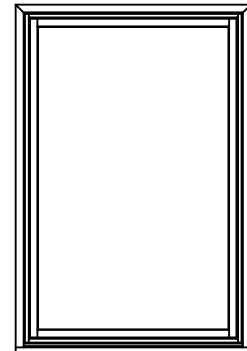

CWTTP5684

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING


Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
FIXED UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

63 1/4"(1607)
66 5/16"(1118)
60 3/4"(1543)
60"(1524)
51 9/16"(1310)

20 13/16"(529)
23 3/8"(594)
18 3/4"(476)
18"(457)
9 9/16"(243)



CWTTP6018

22 13/16"(579)
25 3/8"(645)
20 3/4"(527)
20"(508)
11 9/16"(294)



CWTTP6020

26 13/16"(681)
29 3/8"(746)
24 3/4"(629)
24"(610)
15 9/16"(395)



CWTTP6024

32 13/16"(833)
35 3/8"(898)
30 3/4"(781)
30"(762)
21 9/16"(547)



CWTTP6030

34 13/16"(884)
37 3/8"(949)
32 3/4"(832)
32"(813)
23 9/16"(598)



CWTTP6032

38 13/16"(986)
41 3/8"(1051)
36 3/4"(933)
36"(914)
27 9/16"(700)



CWTTP6036

42 13/16"(1087)
45 3/8"(1153)
40 3/4"(1035)
40"(1016)
31 9/16"(802)



CWTTP6040

44 13/16"(1138)
47 3/8"(1203)
42 3/4"(1085)
42"(1067)
33 9/16"(862)




CWTTP6042

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


63 1/4"(1607)
66 5/16"(1118)
60 3/4"(1543)
60"(1524)
51 9/16"(1310)

50 13/16"(1291)
53 3/8"(1356)
48 3/4"(1238)
48"(1219)
39 9/16"(1005)




CWTTP6048

56 13/16"(1443)
59 3/8"(1508)
54 3/4"(1391)
54"(1372)
45 9/16"(1157)




CWTTP6054

58 13/16"(1494)
61 3/8"(1559)
56 3/4"(1441)
56"(1422)
47 9/16"(1208)




CWTTP6056

62 13/16"(1595)
65 3/8"(1661)
60 3/4"(1543)
60"(1524)
51 9/16"(1310)



CWTTP6060

66 13/16"(1697)
69 3/8"(1762)
64 3/4"(1645)
64"(1626)
55 9/16"(1411)



CWTTP6064

ELEVATION SYMBOL LEGEND:


M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
FIXED UNITS


| | |
|------------------|----------------|
| MO BRICKMOLD | 63 1/4"(1607) |
| MO FLAT CASING | 66 5/16"(1118) |
| ROUGH OPENING | 60 3/4"(1543) |
| FRAME SIZE | 60"(1524) |
| DAYLIGHT OPENING | 51 9/16"(1310) |

68 13/16"(1748)
71 3/8"(1813)
66 3/4"(1695)
66"(1676)
57 9/16"(1462)



CWTTP6066

74 13/16"(1900)
77 3/8"(1965)
72 3/4"(1848)
72"(1829)
63 9/16"(1614)



CWTTP6072

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
2-PANEL UNITS

| MO BRICKMOLD | 51 1/4"(1302) | 59 1/4"(1505) | 63 1/4"(1607) | 67 1/4"(1708) | 75 1/4"(1911) |
|------------------|------------------|------------------|------------------|------------------|------------------|
| MO FLAT CASING | 54 5/16"(1380) | 62 5/16"(1583) | 66 5/16"(1684) | 70 5/16"(1786) | 78 5/16"(1989) |
| ROUGH OPENING | 48 3/4"(1238) | 56 3/4"(1441) | 60 3/4"(1543) | 64 3/4"(1645) | 72 3/4"(1848) |
| FRAME SIZE | 48"(1219) | 56"(1422) | 60"(1524) | 64"(1626) | 72"(1829) |
| DAYLIGHT OPENING | 15 9/16"(395)[2] | 19 9/16"(497)[2] | 21 9/16"(547)[2] | 23 9/16"(598)[2] | 27 9/16"(700)[2] |
| 20 1/2"(521) | | | | | |
| 20 1/16"(516) | | | | | |
| 22 1/2"(572) | | | | | |
| 24 1/16"(611) | | | | | |
| 20 3/4"(527) | | | | | |
| 20"(508) | | | | | |
| 18"(457) | | | | | |
| 9 9/16"(243) | | | | | |
| 26 1/2"(673) | | | | | |
| 28 1/16"(713) | | | | | |
| 24 3/4"(629) | | | | | |
| 24"(610) | | | | | |
| 15 9/16"(395) | | | | | |
| 32 1/2"(826) | | | | | |
| 34 1/16"(865) | | | | | |
| 30 3/4"(781) | | | | | |
| 30"(762) | | | | | |
| 21 9/16"(547) | | | | | |
| 34 1/2"(876) | | | | | |
| 36 1/16"(916) | | | | | |
| 32 3/4"(832) | | | | | |
| 32"(813) | | | | | |
| 23 9/16"(598) | | | | | |
| 38 1/2"(978) | | | | | |
| 40 1/16"(1018) | | | | | |
| 36 3/4"(933) | | | | | |
| 36"(914) | | | | | |
| 27 9/16"(700) | | | | | |
| 42 1/2"(1080) | | | | | |
| 44 1/16"(1119) | | | | | |
| 40 3/4"(1035) | | | | | |
| 40"(1016) | | | | | |
| 31 9/16"(802) | | | | | |
| 44 1/2"(1130) | | | | | |
| 46 1/16"(1170) | | | | | |
| 42 3/4"(1087) | | | | | |
| 42"(1067) | | | | | |
| 33 9/16"(852) | | | | | |
| 50 1/2"(1283) | | | | | |
| 52 1/16"(1322) | | | | | |
| 48 3/4"(1238) | | | | | |
| 48"(1219) | | | | | |
| 39 9/16"(1005) | | | | | |
| 56 1/2"(1435) | | | | | |
| 58 1/16"(1475) | | | | | |
| 54 3/4"(1391) | | | | | |
| 54"(1372) | | | | | |
| 45 9/16"(1157) | | | | | |
| 58 1/2"(1486) | | | | | |
| 60 1/16"(1526) | | | | | |
| 56 3/4"(1441) | | | | | |
| 56"(1422) | | | | | |
| 47 9/16"(1208) | | | | | |
| 62 1/2"(1588) | | | | | |
| 64 1/16"(1627) | | | | | |
| 60 3/4"(1543) | | | | | |
| 60"(1524) | | | | | |
| 51 9/16"(1310) | | | | | |

ELEVATION SYMBOL LEGEND:


M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 VALUES IN [] ARE NUMBER OF DAYLIGHT OPENING PER UNIT
 * AVAILABLE ONLY AS A STATIONARY WINDOW

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


ELEVATIONS
2-PANEL UNITS

| | | | | | |
|------------------|------------------|------------------|------------------|------------------|------------------|
| MO BRICKMOLD | 51 1/4"(1302) | 59 1/4"(1505) | 63 1/4"(1607) | 67 1/4"(1708) | 75 1/4"(1911) |
| MO FLAT CASING | 54 5/16"(1380) | 62 5/16"(1583) | 66 5/16"(1684) | 70 5/16"(1786) | 78 5/16"(1989) |
| ROUGH OPENING | 48 3/4"(1238) | 56 3/4"(1441) | 60 3/4"(1543) | 64 3/4"(1645) | 72 3/4"(1848) |
| FRAME SIZE | 48"(1219) | 56"(1422) | 60"(1524) | 64"(1626) | 72"(1829) |
| DAYLIGHT OPENING | 15 9/16"(395)[2] | 19 9/16"(497)[2] | 21 9/16"(547)[2] | 23 9/16"(598)[2] | 27 9/16"(700)[2] |


66 1/2"(1689)
68 1/16"(1729)
64 3/4"(1645)
64"(1626)
55 9/16"(1411)



68 1/2"(1740)
70 1/16"(1780)
66 3/4"(1695)
66"(1676)
57 9/16"(1462)



74 1/2"(1892)
76 1/16"(1932)
72 3/4"(1848)
72"(1829)
63 9/16"(1614)

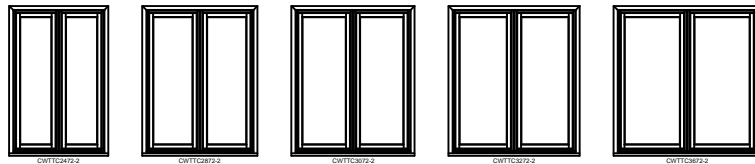

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENING PER UNIT
* AVAILABLE ONLY AS A STATIONARY WINDOW

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
3-PANEL UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

75 1/4"(1911)
78 5/16"(1989)
72 3/4"(1848)
72"(1829)
15 9/16"(395)[3]

87 1/4"(2216)
90 5/16"(2294)
84 3/4"(2153)
84"(2134)
19 9/16"(497)[3]

93 1/4"(2369)
96 5/16"(2446)
90 3/4"(2305)
90"(2286)
21 9/16"(547)[3]

99 1/4"(2521)
102 5/16"(2599)
96 3/4"(2457)
96"(2438)
23 9/16"(598)[3]






111 1/4"(2856)
114 5/16"(2904)
108 3/4"(2762)
108"(2743)
27 9/16"(700)[3]

20 1/2"(521)
22 1/2"(572)
22 1/2"(572)
26 1/2"(673)
32 1/2"(826)
34 1/2"(878)
38 1/2"(978)
42 1/2"(1080)
44 1/2"(1130)
50 1/2"(1283)
56 1/2"(1435)
58 1/2"(1486)
62 1/2"(1588)

20 1/16"(511)
24 1/16"(611)
24 3/4"(629)
24*(610)
30 3/4"(781)
32*(813)
36*(914)
40 3/4"(1035)
42*(1067)
48*(1219)
54*(1372)
56*(1422)
60*(1524)

18*(457)
20*(508)
11 9/16"(284)
21 9/16"(547)
23 9/16"(598)
27 9/16"(700)
33 9/16"(852)
39 9/16"(1005)
45 9/16"(1157)
47 9/16"(1208)

9 9/16"(243)
11 9/16"(294)
15 9/16"(395)
18 3/4"(476)
20 3/4"(527)
24*(610)
27 9/16"(700)
31 9/16"(802)
33 9/16"(852)
39 9/16"(1005)
45 9/16"(1157)
47 9/16"(1208)

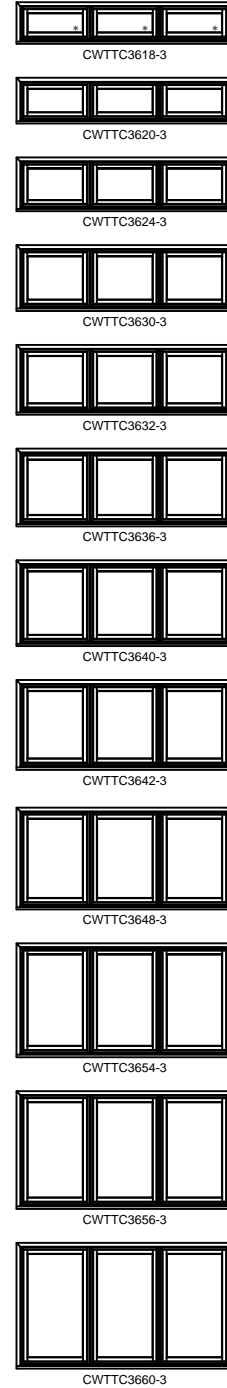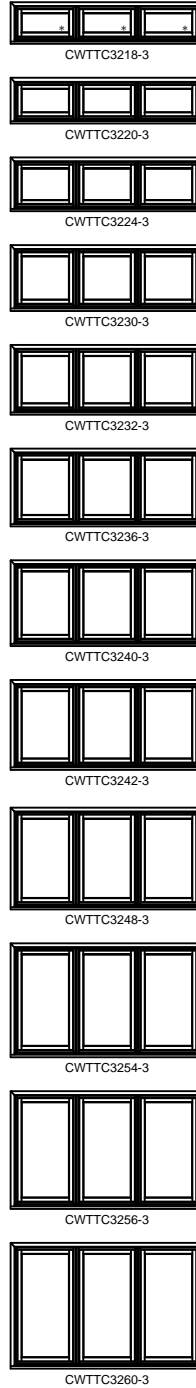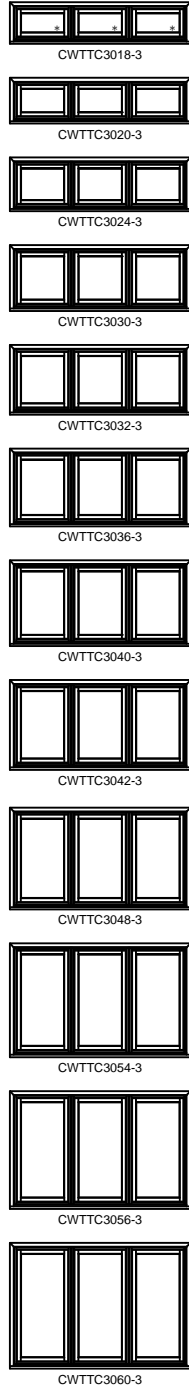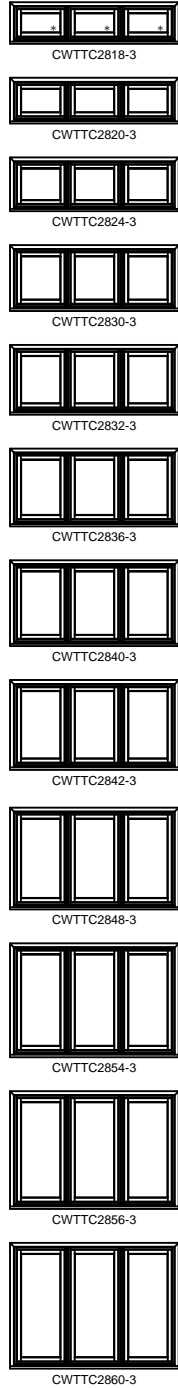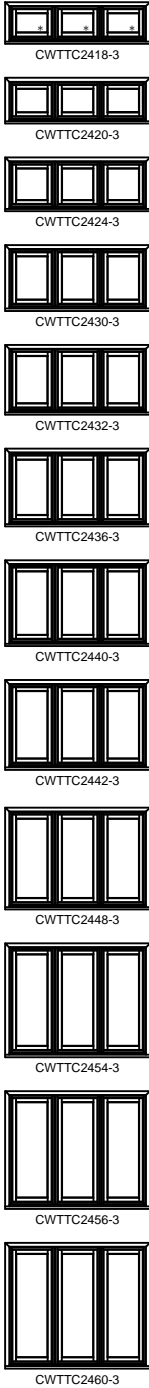

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENING PER UNIT
* AVAILABLE ONLY AS A STATIONARY WINDOW

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
3-PANEL UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

75 1/4"(1911)
78 5/16"(1989)
72 3/4"(1848)
72"(1829)
15 9/16"(395)[3]


87 1/4"(2216)
90 5/16"(2294)
84 3/4"(2153)
84"(2134)
19 9/16"(497)[3]

93 1/4"(2369)
96 5/16"(2446)
90 3/4"(2305)
90"(2286)
21 9/16"(547)[3]


99 1/4"(2521)
102 5/16"(2599)
96 3/4"(2457)
96"(2438)
23 9/16"(598)[3]

111 1/4"(2856)
114 5/16"(2904)
108 3/4"(2762)
108"(2743)
27 9/16"(700)[3]


66 1/2"(1689)
68 1/16"(1729)
64 3/4"(1645)
64"(1626)
55 9/16"(1411)




CWTTTC2464-3




CWTTTC2864-3



CWTTTC3064-3




CWTTTC3264-3




CWTTTC3664-3


68 1/2"(1740)
70 1/16"(1780)
66 3/4"(1695)
66"(1676)
57 9/16"(1462)




CWTTTC2466-3




CWTTTC2866-3



CWTTTC3066-3




CWTTTC3266-3




CWTTTC3666-3


74 1/2"(1892)
76 1/16"(1932)
72 3/4"(1848)
72"(1829)
63 9/16"(1614)




CWTTTC2472-3




CWTTTC2872-3



CWTTTC3072-3



CWTTTC3272-3



CWTTTC3672-3

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
VALUES IN [] ARE NUMBER OF DAYLIGHT OPENING PER UNIT
* AVAILABLE ONLY AS A STATIONARY WINDOW

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.