

---

TABLE OF CONTENTS

---

Single Unit .....	6-2
Picture Unit .....	6-8
Twin Awning .....	6-14
2 High Awning .....	6-16
2 Wide/ 2 High .....	6-18
30 Wide CBAP Combo .....	6-20
32 Wide CBAP Combo .....	6-24
36 Wide CBAP Combo .....	6-28
42 Wide CBAP Combo .....	6-32
48 Wide CBAP Combo .....	6-36

**ELEVATIONS  
SINGLE UNITS**

MO BRICKMOLD	21 1/4"(540)	23 1/4"(591)	27 1/4"(692)	31 1/4"(794)	33 1/4"(845)	35 1/4"(895)	39 1/4"(997)
MO FLAT CASING	24 5/16"(618)	26 5/16"(668)	30 5/16"(770)	34 5/16"(872)	36 5/16"(922)	38 5/16"(973)	42 5/16"(1075)
ROUGH OPENING	18 3/4"(476)	20 3/4"(527)	24 3/4"(629)	28 3/4"(730)	30 3/4"(781)	32 3/4"(832)	36 3/4"(933)
FRAME SIZE	18"(457)	20"(508)	24"(610)	28"(711)	30"(762)	32"(813)	36"(914)
DAYLIGHT OPENING	13 1/16"(332)	15 1/16"(383)	19 1/16"(484)	23 1/16"(586)	25 1/16"(637)	27 1/16"(687)	31 1/16"(789)
	17 11/32"(441) 18 7/8"(479) 14 3/4"(375) 14"(356) 8 15/32"(215)						
	CWA1814	CWA2014	CWA2414	CWA2814	CWA3014	CWA3214	CWA3614
	21 11/32"(542) 22 7/8"(581) 18 3/4"(476) 18"(457) 12 15/32"(317)						
	CWA1818	CWA2018	CWA2418	CWA2818	CWA3018	CWA3218	CWA3618
	23 11/32"(593) 24 7/8"(632) 20 3/4"(527) 20"(508) 14 15/32"(368)						
	CWA1820	CWA2020	CWA2420	CWA2820	CWA3020	CWA3220	CWA3620
	27 11/32"(695) 28 7/8"(733) 24 3/4"(629) 24"(610) 18 15/32"(469)						
	CWA1824	CWA2024	CWA2424	CWA2824	CWA3024	CWA3224	CWA3624
	31 11/32"(796) 32 7/8"(835) 28 3/4"(730) 28"(711) 22 15/32"(571)						
	CWA1828	CWA2028	CWA2428	CWA2828	CWA3028	CWA3228	CWA3628
	33 11/32"(847) 34 7/8"(886) 30 3/4"(781) 30"(762) 24 15/32"(622)						
	CWA1830	CWA2030	CWA2430	CWA2830	CWA3030	CWA3230	CWA3630
	35 11/32"(898) 36 7/8"(937) 32 3/4"(832) 32"(813) 26 15/32"(672)						
	CWA1832	CWA2032	CWA2432	CWA2832	CWA3032	CWA3232	CWA3632
	39 11/32"(999) 40 7/8"(1038) 36 3/4"(933) 36"(914) 30 15/32"(774)						
	CWA1836	CWA2036	CWA2436	CWA2836	CWA3036	CWA3236	CWA3636
	43 11/32"(1101) 44 7/8"(1140) 40 3/4"(1035) 40"(1016) 34 15/32"(876)						
	CWA1840	CWA2040	CWA2440	CWA2840	CWA3040	CWA3240	CWA3640

**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS  
## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**SINGLE UNITS**

	21 1/4"(540)	23 1/4"(591)	27 1/4"(692)	31 1/4"(794)	33 1/4"(845)	35 1/4"(895)	39 1/4"(997)
MO BRICKMOLD	21 1/4"(540)	23 1/4"(591)	27 1/4"(692)	31 1/4"(794)	33 1/4"(845)	35 1/4"(895)	39 1/4"(997)
MO FLAT CASING	24 5/16"(618)	26 5/16"(668)	30 5/16"(770)	34 5/16"(872)	36 5/16"(922)	38 5/16"(973)	42 5/16"(1075)
ROUGH OPENING	18 3/4"(476)	20 3/4"(527)	24 3/4"(629)	28 3/4"(730)	30 3/4"(781)	32 3/4"(832)	36 3/4"(933)
FRAME SIZE	18"(457)	20"(508)	24"(610)	28"(711)	30"(762)	32"(813)	36"(914)
DAYLIGHT OPENING	13 1/16"(332)	15 1/16"(383)	19 1/16"(484)	23 1/16"(586)	25 1/16"(637)	27 1/16"(687)	31 1/16"(789)

45 11/32"(1152)							
46 7/8"(1191)	CWA1842	CWA2042	CWA2442	CWA2842	CWA3042	CWA3242	CWA3642
42 3/4"(1086)							
42"(1067)							
36 15/32"(926)							

51 11/32"(1304)							
52 7/8"(1343)	CWA1848	CWA2048	CWA2448	CWA2848	CWA3048	CWA3248	CWA3648
48 3/4"(1238)							
48"(1219)							
42 15/32"(1079)							

**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS  
## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS  
SINGLE UNITS**

	43 1/4"(1099) 46 5/16"(1176) 40 3/4"(1035) 40"(1016) 35 1/16"(891)	45 1/4"(1149) 48 5/16"(1227) 42 3/4"(1086) 42"(1067) 37 1/16"(941)	51 1/4"(1302) 54 5/16"(1380) 48 3/4"(1238) 48"(1219) 43 1/16"(1094)	57 1/4"(1454) 60 5/16"(1532) 54 3/4"(1391) 54"(1372) 49 1/16"(1246)	59 1/4"(1505) 62 5/16"(1583) 56 3/4"(1441) 56"(1422) 51 1/16"(1297)
MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING					
17 11/32"(441) 18 7/8"(479) 14 3/4"(375) 14 (358) 8 1/32"(215)					
21 11/32"(542) 22 7/8"(581) 18 3/4"(476) 16 (457) 12 15/32"(317)					
23 11/32"(683) 24 7/8"(632) 20 3/4"(527) 20 (508) 14 1/32"(368)					
27 11/32"(695) 28 7/8"(733) 24 3/4"(629) 24 (610) 18 1/32"(469)					
31 11/32"(796) 32 7/8"(835) 28 3/4"(730) 28 (711) 22 1/32"(571)					
33 11/32"(847) 34 7/8"(886) 30 3/4"(781) 30 (762) 24 1/32"(622)					

**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS  
## NUMBER INDICATES PREFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**SINGLE UNITS**

MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING

43 1/4"(1099)  
46 5/16"(1176)  
40 3/4"(1035)  
40"(1016)  
35 1/16"(891)


45 1/4"(1149)  
48 5/16"(1227)  
42 3/4"(1086)  
42"(1067)  
37 1/16"(941)

51 1/4"(1302)  
54 5/16"(1380)  
48 3/4"(1238)  
48"(1219)  
43 1/16"(1094)


57 1/4"(1454)  
60 5/16"(1532)  
54 3/4"(1391)  
54"(1372)  
49 1/16"(1246)

59 1/4"(1505)  
62 5/16"(1583)  
56 3/4"(1441)  
56"(1422)  
51 1/16"(1297)


35 11/32"(898)  
36 7/8"(937)  
32 3/4"(832)  
32"(813)  
26 15/32"(672)




CWA4032




CWA4232



CWA4832




CWA5432




CWA5632


39 11/32"(989)  
40 7/8"(1038)  
36 3/4"(933)  
36"(914)  
30 15/32"(774)



CWA4036



CWA4236



CWA4836




CWA5436




CWA5636


43 11/32"(1101)  
44 7/8"(1140)  
40 3/4"(1035)  
40"(1016)  
34 15/32"(876)




CWA4040




CWA4240



CWA4840




CWA5440




CWA5640


45 11/32"(1152)  
46 7/8"(1191)  
42 3/4"(1086)  
42"(1067)  
36 15/32"(926)




CWA4042




CWA4242



CWA4842




CWA5442




CWA5642


51 11/32"(1304)  
52 7/8"(1343)  
48 3/4"(1238)  
48"(1219)  
42 15/32"(1079)




CWA4048




CWA4248



CWA4848



CWA5448












CWA5648

**ELEVATION SYMBOL LEGEND:**

M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS  
## NUMBER INDICATES PREFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizing. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**SINGLE UNITS**

MO BRICKMOLD	63 1/4"(1607)	69 1/4"(1759)	75 1/4"(1911)
MO FLAT CASING	66 5/16"(1684)	72 5/16"(1837)	78 5/16"(1989)
ROUGH OPENING	60 3/4"(1543)	66 3/4"(1695)	72 3/4"(1848)
FRAME SIZE	60"(1524)	66"(1676)	72"(1829)
DAYLIGHT OPENING	55 1/16"(1399)	61 1/16"(1551)	67 1/16"(1703)
17 11/32"(441)			
18 7/8"(479)	CWA6014	CWA6614	CWA7214
14 3/4"(375)			
14"(356)	CWA6018	CWA6618	CWA7218
8 15/32"(215)			
21 11/32"(542)	CWA6020	CWA6620	CWA7220
22 7/8"(581)			
18 3/4"(476)			
18"(457)			
12 15/32"(317)			
23 11/32"(583)			
24 7/8"(632)			
20 3/4"(527)			
20"(508)			
14 15/32"(368)			

**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS  
## NUMBER INDICATES PREFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**SINGLE UNITS**

MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING

43 1/4"(1099)  
46 5/16"(1176)  
40 3/4"(1035)  
40"(1016)  
35 1/16"(891)


45 1/4"(1149)  
48 5/16"(1227)  
42 3/4"(1086)  
42"(1067)  
37 1/16"(941)

51 1/4"(1302)  
54 5/16"(1380)  
48 3/4"(1238)  
48"(1219)  
43 1/16"(1094)


57 1/4"(1454)  
60 5/16"(1532)  
54 3/4"(1391)  
54"(1372)  
49 1/16"(1246)

59 1/4"(1505)  
62 5/16"(1583)  
56 3/4"(1441)  
56"(1422)  
51 1/16"(1297)

35 11/32"(898)  
36 7/8"(937)  
32 3/4"(832)  
32"(813)  
26 15/32"(672)



CWA4032



CWA4232



CWA4832




CWA5432




CWA5632


39 11/32"(999)  
40 7/8"(1038)  
36 3/4"(933)  
36"(914)  
30 15/32"(774)



CWA4036



CWA4236



CWA4836




CWA5436




CWA5636


43 11/32"(1101)  
44 7/8"(1140)  
40 3/4"(1035)  
40"(1016)  
34 15/32"(876)




CWA4040




CWA4240



CWA4840




CWA5440




CWA5640


45 11/32"(1152)  
46 7/8"(1191)  
42 3/4"(1086)  
42"(1067)  
36 15/32"(926)




CWA4042




CWA4242



CWA4842




CWA5442




CWA5642


51 11/32"(1304)  
52 7/8"(1343)  
48 3/4"(1238)  
48"(1219)  
42 15/32"(1079)




CWA4048




CWA4248



CWA4848



CWA5448



CWA5648

**ELEVATION SYMBOL LEGEND:**

M.O. = MASORNY OPENING

VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS

## NUMBER INDICATES PREFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS  
PICTURE UNITS**

	MO BRICKMOLD	MO FLAT CASING	ROUGH OPENING	FRAME SIZE	DAYLIGHT OPENING		
	21 1/4"(540)	23 1/4"(591)	27 1/4"(692)	31 1/4"(794)	33 1/4"(845)	35 1/4"(895)	39 1/4"(997)
	24 5/16"(618)	26 5/16"(668)	30 5/16"(770)	34 5/16"(872)	36 5/16"(922)	38 5/16"(973)	42 5/16"(1075)
	18 3/4"(476)	20 3/4"(527)	24 3/4"(629)	28 3/4"(730)	30 3/4"(781)	32 3/4"(832)	36 3/4"(933)
	18"(457)	20"(508)	24"(610)	28"(711)	30"(762)	32"(813)	36"(914)
	13 1/16"(332)	15 1/16"(383)	19 1/16"(484)	23 1/16"(586)	25 1/16"(637)	27 1/16"(687)	31 1/16"(789)
	17 11/32"(441)	18 7/8"(479)	18 3/4"(476)	14"(356)	8 15/32"(215)		
	21 11/32"(542)	22 7/8"(581)	18 3/4"(476)	18"(457)	12 15/32"(317)		
	23 11/32"(593)	24 7/8"(632)	20 3/4"(527)	20"(508)	14 15/32"(368)		
	27 11/32"(695)	28 7/8"(733)	24 3/4"(629)	24"(610)	18 15/32"(469)		
	31 11/32"(796)	32 7/8"(835)	28 3/4"(730)	28"(711)	22 15/32"(571)		
	33 11/32"(847)	34 7/8"(886)	30 3/4"(781)	30"(762)	24 15/32"(622)		
	35 11/32"(898)	36 7/8"(937)	32 3/4"(832)	32"(813)	26 15/32"(672)		
	39 11/32"(999)	40 7/8"(1038)	36 3/4"(933)	36"(914)	30 15/32"(774)		
	43 11/32"(1101)	44 7/8"(1140)	40 3/4"(1035)	40"(1016)	34 15/32"(876)		
	CWA1814	CWA2014	CWA2414	CWA2814	CWA3014	CWA3214	CWA3614
	CWA1818	CWA2018	CWA2418	CWA2818	CWA3018	CWA3218	CWA3618
	CWA1820	CWA2020	CWA2420	CWA2820	CWA3020	CWA3220	CWA3620
	CWA1824	CWA2024	CWA2424	CWA2824	CWA3024	CWA3224	CWA3624
	CWA1828	CWA2028	CWA2428	CWA2828	CWA3028	CWA3228	CWA3628
	CWA1830	CWA2030	CWA2430	CWA2830	CWA3030	CWA3230	CWA3630
	CWA1832	CWA2032	CWA2432	CWA2832	CWA3032	CWA3232	CWA3632
	CWA1836	CWA2036	CWA2436	CWA2836	CWA3036	CWA3236	CWA3636
	CWA1840	CWA2040	CWA2440	CWA2840	CWA3040	CWA3240	CWA3640

**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS  
## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.



### ELEVATIONS PICTURE UNITS

	21 1/4"(540)	23 1/4"(591)	27 1/4"(692)	31 1/4"(794)	33 1/4"(845)	35 1/4"(895)	39 1/4"(997)
MO BRICKMOLD	24 5/16"(618)	26 5/16"(668)	30 5/16"(770)	34 5/16"(872)	36 5/16"(922)	38 5/16"(973)	42 5/16"(1075)
MO FLAT CASING	18 3/4"(476)	20 3/4"(527)	24 3/4"(629)	28 3/4"(730)	30 3/4"(781)	32 3/4"(832)	36 3/4"(933)
ROUGH OPENING	18"(457)	20"(508)	24"(610)	28"(711)	30"(762)	32"(813)	36"(914)
FRAME SIZE	13 1/16"(332)	15 1/16"(383)	19 1/16"(484)	23 1/16"(586)	25 1/16"(637)	27 1/16"(687)	31 1/16"(789)
DAYLIGHT OPENING							
	CWA1842	CWA2042	CWA2442	CWA2842	CWA3042	CWA3242	CWA3642
	CWA1848	CWA2048	CWA2448	CWA2848	CWA3048	CWA3248	CWA3648

45 11/32"(1152)  
46 7/8"(1191)  
42 3/4"(1086)  
42"(1067)  
36 15/32"(926)

51 11/32"(1304)  
52 7/8"(1343)  
48 3/4"(1238)  
48"(1219)  
42 15/32"(1079)

**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS  
## NUMBER INDICATES PREFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS  
PICTURE UNITS**

	MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	43 1/4"(1099) 46 5/16"(1176) 40 3/4"(1035) 40"(1016) 35 1/16"(891)	45 1/4"(1149) 48 5/16"(1227) 42 3/4"(1086) 42"(1067) 37 1/16"(941)	51 1/4"(1302) 54 5/16"(1380) 48 3/4"(1238) 48"(1219) 43 1/16"(1094)	57 1/4"(1454) 60 5/16"(1532) 54 3/4"(1391) 54"(1372) 49 1/16"(1246)	59 1/4"(1505) 62 5/16"(1583) 56 3/4"(1441) 56"(1422) 51 1/16"(1297)
17 11/32"(441) 18 7/8"(479) 14 3/4"(375) 14"(356) 8 15/32"(215)						
21 11/32"(542) 22 7/8"(681) 18 3/4"(476) 18"(457) 12 15/32"(317)						
23 11/32"(693) 24 7/8"(632) 20 3/4"(527) 20"(508) 14 15/32"(368)						
27 11/32"(895) 28 7/8"(733) 24 3/4"(629) 24"(610) 18 15/32"(469)						
31 11/32"(796) 32 7/8"(835) 28 3/4"(730) 28"(711) 22 15/32"(571)						
33 11/32"(847) 34 7/8"(886) 30 3/4"(781) 30"(762) 24 15/32"(622)						

**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS  
## NUMBER INDICATES PREFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS  
PICTURE UNITS**

MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING

43 1/4"(1099)  
46 5/16"(1176)  
40 3/4"(1035)  
40"(1016)  
35 1/16"(891)


45 1/4"(1149)  
48 5/16"(1227)  
42 3/4"(1086)  
42"(1067)  
37 1/16"(941)

51 1/4"(1302)  
54 5/16"(1380)  
48 3/4"(1238)  
48"(1219)  
43 1/16"(1094)


57 1/4"(1454)  
60 5/16"(1532)  
54 3/4"(1391)  
54"(1372)  
49 1/16"(1246)

59 1/4"(1505)  
62 5/16"(1583)  
56 3/4"(1441)  
56"(1422)  
51 1/16"(1297)


35 11/32"(898)  
36 7/8"(937)  
32 3/4"(832)  
32"(813)  
26 15/32"(672)




CWA4032




CWA4232



CWA4832




CWA5432




CWA5632


39 11/32"(989)  
40 7/8"(1038)  
36 3/4"(933)  
36"(914)  
30 15/32"(774)



CWA4036



CWA4236



CWA4836




CWA5436




CWA5636


43 11/32"(1101)  
44 7/8"(1140)  
40 3/4"(1035)  
40"(1016)  
34 15/32"(876)




CWA4040




CWA4240



CWA4840




CWA5440




CWA5640


45 11/32"(1152)  
46 7/8"(1191)  
42 3/4"(1086)  
42"(1067)  
36 15/32"(926)




CWA4042




CWA4242



CWA4842




CWA5442




CWA5642


51 11/32"(1304)  
52 7/8"(1343)  
48 3/4"(1238)  
48"(1219)  
42 15/32"(1079)




CWA4048




CWA4248



CWA4848



CWA5448












CWA5648

**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS  
## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS  
PICTURE UNITS**

MO BRICKMOLD	63 1/4"(1607)	69 1/4"(1759)	75 1/4"(1911)
MO FLAT CASING	66 5/16"(1684)	72 5/16"(1837)	78 5/16"(1989)
ROUGH OPENING	60 3/4"(1543)	66 3/4"(1695)	72 3/4"(1848)
FRAME SIZE	60"(1524)	66"(1676)	72"(1829)
DAYLIGHT OPENING	55 1/16"(1399)	61 1/16"(1551)	67 1/16"(1703)
17 11/32"(444)			
18 7/8"(479)	CWA6014	CWA6614	CWA7214
14 3/4"(375)			
14"(356)	CWA6018	CWA6618	CWA7218
8 15/32"(215)			
21 11/32"(542)	CWA6020	CWA6620	CWA7220
22 7/8"(581)			
18 3/4"(476)			
18"(457)			
12 15/32"(317)			
23 11/32"(593)			
24 7/8"(632)			
20 3/4"(527)			
20"(508)			
14 15/32"(368)			

**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS  
## NUMBER INDICATES PREFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS  
PICTURE UNITS**

MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING

63 1/4"(1607)  
66 5/16"(1684)  
60 3/4"(1543)  
60"(1524)  
55 1/16"(1399)

69 1/4"(1759)  
72 5/16"(1837)  
66 3/4"(1695)  
66"(1676)  
61 1/16"(1551)

75 1/4"(1911)  
78 5/16"(1989)  
72 3/4"(1848)  
72"(1829)  
67 1/16"(1703)

27 11/32"(695)  
28 7/8"(733)  
24 3/4"(629)  
24"(610)  
18 15/32"(469)



CWA6024



CWA6624



CWA7224

31 11/32"(796)  
32 7/8"(835)  
28 3/4"(730)  
28"(711)  
22 15/32"(571)



CWA6028



CWA6628



CWA7228

33 11/32"(847)  
34 7/8"(886)  
30 3/4"(781)  
30"(762)  
24 15/32"(622)



CWA6030



CWA6630



CWA7230

35 11/32"(898)  
36 7/8"(937)  
32 3/4"(832)  
32"(813)  
26 15/32"(672)



CWA6032



CWA6632



CWA7232

39 11/32"(989)  
40 7/8"(1038)  
36 3/4"(933)  
36"(914)  
30 15/32"(774)



CWA6036



CWA6636



CWA7236

43 11/32"(1101)  
44 7/8"(1140)  
40 3/4"(1035)  
40"(1016)  
34 15/32"(876)



CWA6040




CWA6640



CWA7240


45 11/32"(1152)  
46 7/8"(1191)  
42 3/4"(1086)  
42"(1067)  
36 15/32"(926)



CWA6042




CWA6642



CWA7242

51 11/32"(1304)  
52 7/8"(1343)  
48 3/4"(1238)  
48"(1219)  
42 15/32"(1079)



CWA6048



CWA6648



CWA7248

**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS  
## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS  
TWIN UNITS**

MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	39 1/4"(997) 42 5/16"(1075) 36 3/4"(933) 36"(914)	43 1/4"(1099) 46 5/16"(1176) 40 3/4"(1035) 40"(1016)	51 1/4"(1302) 54 5/16"(1380) 48 3/4"(1238) 48"(1219)	59 1/4"(1505) 62 5/16"(1583) 56 3/4"(1441) 56"(1422)	63 1/4"(1607) 66 5/16"(1684) 60 3/4"(1543) 60"(1524)	67 1/4"(1708) 70 5/16"(1786) 64 3/4"(1645) 64"(1626)
	13 1/16"(332) [2]	15 1/16"(383) [2]	19 1/16"(484) [2]	23 1/16"(586) [2]	25 1/16"(637) [2]	27 1/16"(687) [2]

**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS

Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS  
TWIN UNITS**

MO BRICKMOLD  
MO FLAT CASING  
ROUGH OPENING  
FRAME SIZE  
DAYLIGHT OPENING

75 1/4"(1911)  
78 5/16"(1989)  
72 3/4"(1848)  
72"(1829)  
31 1/16"(789) [2]

83 1/4"(2115)  
86 5/16"(2192)  
80 3/4"(2051)  
80"(2032)  
35 1/16"(789) [2]

87 1/4"(2216)  
90 5/16"(2294)  
84 3/4"(2153)  
84"(2134)  
37 1/16"(941) [2]

99 1/4"(2521)  
102 5/16"(2599)  
96 3/4"(2457)  
96"(2438)  
43 1/16"(1094) [2]

17 11/32"(441)  
18 7/8"(479)  
14 3/4"(375)  
14"(356)  
8 15/32"(215)  
21 11/32"(542)  
22 7/8"(581)  
18 3/4"(476)  
18"(457)  
12 15/32"(317)  
23 11/32"(593)  
24 7/8"(632)  
20 3/4"(527)  
20"(508)  
14 15/32"(388)  
27 11/32"(695)  
28 7/8"(733)  
24 3/4"(629)  
24"(610)  
18 15/32"(469)  
31 11/32"(796)  
32 7/8"(835)  
28 3/4"(730)  
28"(711)  
22 15/32"(571)  
33 11/32"(847)  
34 7/8"(886)  
30 3/4"(781)  
30"(762)  
24 15/32"(622)  
35 11/32"(888)  
36 7/8"(927)  
32 3/4"(822)  
32"(803)  
26 15/32"(672)  
39 11/32"(999)  
40 7/8"(1038)  
36 3/4"(933)  
36"(914)  
30 15/32"(774)  
43 11/32"(1101)  
44 7/8"(1140)  
40 3/4"(1035)  
40"(1016)  
34 15/32"(876)  
45 11/32"(1152)  
46 7/8"(1191)  
42 3/4"(1086)  
42"(1067)  
36 15/32"(926)  
51 11/32"(1304)  
52 7/8"(1343)  
48 3/4"(1238)  
48"(1219)  
42 15/32"(1079)



CWA3614-2



CWA4014-2



CWA4214-2



CWA4814-2



CWA3618-2



CWA4018-2



CWA4218-2



CWA4818-2



CWA3620-2



CWA4020-2



CWA4220-2



CWA4820-2



CWA3624-2



CWA4024-2



CWA4224-2



CWA4824-2



CWA3628-2



CWA4028-2



CWA4228-2



CWA4828-2



CWA3630-2




CWA4030-2




CWA4230-2




CWA4830-2




CWA3632-2




CWA4032-2



CWA4232-2




CWA4832-2




CWA3636-2



CWA4036-2



CWA4236-2



CWA4836-2



CWA3640-2



CWA4040-2



CWA4240-2



CWA4840-2



CWA3642-2



CWA4042-2



CWA4242-2



CWA4842-2



CWA3644-2




CWA4044-2




CWA4244-2




CWA4844-2




CWA3646-2



CWA4046-2



CWA4246-2



CWA4846-2



CWA3648-2



CWA4048-2



CWA4248-2



CWA4848-2

**ELEVATION SYMBOL LEGEND:**  
M.O. = MASONRY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS

Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS  
2-HIGH UNITS**

MO BRICKMOLD	33 1/4"(845)	35 1/4"(895)	39 1/4"(997)	43 1/4"(1099)	45 1/4"(1149)	51 1/4"(1302)
MO FLAT CASING	36 5/16"(922)	38 5/16"(973)	42 5/16"(1075)	46 5/16"(1176)	48 5/16"(1227)	54 5/16"(1380)
ROUGH OPENING	30 3/4"(781)	32 3/4"(832)	36 3/4"(933)	40 3/4"(1035)	42 3/4"(1086)	48 3/4"(1238)
FRAME SIZE	30"(762)	32"(813)	36"(914)	40"(1016)	42"(1067)	48"(1219)
DAYLIGHT OPENING	25 1/16"(637)	27 1/16"(687)	31 1/16"(789)	35 1/16"(891)	37 1/16"(941)	43 1/16"(1094)
39 11/32"(796) 40 7/8"(1038) 36 3/4"(933) 36"(914) 12 15/32"(215) [2]						
43 11/32"(1101) 44 7/8"(1140) 40 3/4"(1035) 40"(1016) 14 15/32"(388) [2]						
51 11/32"(1304) 52 7/8"(1343) 48 3/4"(1238) 48"(1219) 18 15/32"(469) [2]						
59 11/32"(1507) 60 7/8"(1546) 56 3/4"(1441) 56"(1422) 22 15/32"(571) [2]						
63 11/32"(1609) 64 7/8"(1648) 60 3/4"(1543) 60"(1524) 24 15/32"(622) [2]						
67 11/32"(1711) 68 7/8"(1749) 64 3/4"(1645) 64"(1626) 26 15/32"(672) [2]						
75 11/32"(1914) 76 7/8"(1953) 72 3/4"(1848) 72"(1829) 30 15/32"(774) [2]						
83 11/32"(2117) 84 7/8"(2156) 80 3/4"(2051) 80"(2032) 34 15/32"(876) [2]						

**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS


Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.



**ELEVATIONS  
2-HIGH UNITS**


MO BRICKMOLD	33 1/4"(845)	35 1/4"(895)	39 1/4"(997)	43 1/4"(1099)	45 1/4"(1149)	51 1/4"(1302)
MO FLAT CASING	36 5/16"(922)	38 5/16"(973)	42 5/16"(1075)	46 5/16"(1176)	48 5/16"(1227)	54 5/16"(1380)
ROUGH OPENING	30 3/4"(781)	32 3/4"(832)	36 3/4"(933)	40 3/4"(1035)	42 3/4"(1086)	48 3/4"(1238)
FRAME SIZE	30"(762)	32"(813)	36"(914)	40"(1016)	42"(1067)	48"(1219)
DAYLIGHT OPENING	25 1/16"(637)	27 1/16"(687)	31 1/16"(789)	35 1/16"(891)	37 1/16"(941)	43 1/16"(1094)

87 1/32"(2219)  
88 7/8"(2257)  
89 1/4"(2308)  
90 1/2"(2353)  
36 15/32"(926) [2]

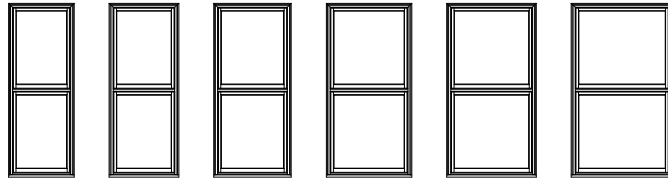

CWA3042-12 CWA3242-12 CWA3642-12 CWA4042-12 CWA4242-12 CWA4842-12

98 11/32"(2523)  
100 7/8"(2562)  
99 1/2"(2513)  
101 1/4"(2583)  
42 15/32"(1079) [2]

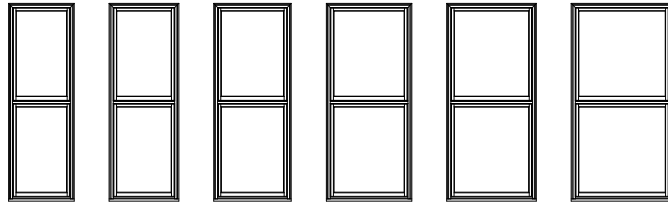

CWA3048-12 CWA3248-12 CWA3632-12 CWA4048-12 CWA4248-12 CWA4848-12

**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS

Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS  
2-WIDE 2-HIGH**

	MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	63 1/4"(1607) 66 5/16"(1684) 60 3/4"(1543) 60"(1524) 25 1/16"(637) [2]	67 1/4"(1708) 70 5/16"(1786) 64 3/4"(1645) 64"(1626) 27 1/16"(687) [2]	75 1/4"(1911) 78 5/16"(1989) 72 3/4"(1848) 72"(1829) 31 1/16"(789) [2]	83 1/4"(2115) 86 5/16"(2192) 80 3/4"(2051) 80"(2032) 35 1/16"(789) [2]	87 1/4"(2216) 90 5/16"(2294) 84 3/4"(2153) 84"(2134) 37 1/16"(941) [2]	87 1/4"(2216) 90 5/16"(2294) 84 3/4"(2051) 84"(2134) 13 1/16"(332) [2]
39 11/32"(796) 40 7/8"(1038) 36 3/4"(933) 36"(914) 12 15/32"(215) [2]							
43 11/32"(1101) 44 7/8"(1140) 40 3/4"(1035) 40"(1016) 14 15/32"(368) [2]							
51 11/32"(1304) 52 7/8"(1343) 48 3/4"(1238) 48"(1219) 18 15/32"(469) [2]							
59 11/32"(1507) 60 7/8"(1546) 56 3/4"(1441) 56"(1422) 22 15/32"(571) [2]							
63 11/32"(1609) 64 7/8"(1648) 60 3/4"(1543) 60"(1524) 24 15/32"(622) [2]							
67 11/32"(1711) 68 7/8"(1749) 64 3/4"(1645) 64"(1626) 26 15/32"(672) [2]							
75 11/32"(1914) 76 7/8"(1953) 72 3/4"(1848) 72"(1829) 30 15/32"(774) [2]							
83 11/32"(2117) 84 7/8"(2156) 80 3/4"(2051) 80"(2032) 34 15/32"(878) [2]							


**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS

Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


**ELEVATIONS**  
**2-WIDE 2-HIGH**

MO BRICKMOLD	63 1/4"(1607)	67 1/4"(1708)	75 1/4"(1911)	83 1/4"(2115)	87 1/4"(2216)	87 1/4"(2216)
MO FLAT CASING	66 5/16"(1684)	70 5/16"(1786)	78 5/16"(1989)	86 5/16"(2192)	90 5/16"(2294)	90 5/16"(2294)
ROUGH OPENING	60 3/4"(1543)	64 3/4"(1645)	72 3/4"(1848)	80 3/4"(2051)	84 3/4"(2153)	84 3/4"(2051)
FRAME SIZE	60"(1524)	64"(1626)	72"(1829)	80"(2032)	84"(2134)	84"(2134)
DAYLIGHT OPENING	25 1/16"(637) [2]	27 1/16"(687) [2]	31 1/16"(789) [2]	35 1/16"(889) [2]	37 1/16"(941) [2]	13 1/16"(332) [2]


87 11/32"(2219)  
88 7/8"(2257)  
84 3/4"(2153)  
84"(2134)  
36 15/32"(926) [2]




CWA3042-22




CWA3242-22




CWA3642-22



CWA4042-22




CWA4242-22




CWA4842-22


89 11/32"(2233)  
90 7/8"(2262)  
88 3/4"(2257)  
86"(2183)  
42 15/32"(1079) [2]




CWA3048-22




CWA3248-22




CWA3648-22



CWA4048-22



CWA4248-22




CWA4848-22

**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS


Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

MO BRICKMOLD	33 1/4"(845)	63 1/4"(1607)
MO FLAT CASING	36 5/16"(922)	66 5/16"(1684)
ROUGH OPENING	30 3/4"(781)	60 3/4"(1543)
FRAME SIZE	30"(762)	60"(1524)
DAYLIGHT OPENING	25 1/16"(637)	25 1/16"(637) [2]

57 11/32"(1457)  
58 7/8"(1495)  
54 3/4"(1391)  
54"(1372)  
30 15/32"(774) [1]  
12 15/32"(317) [1]




CWAP303618




CWAP303618-2

59 11/32"(1507)  
60 7/8"(1546)  
56 3/4"(1441)  
56"(1422)  
30 15/32"(774) [1]  
14 15/32"(368) [1]




CWAP303620




CWAP303620-2

63 11/32"(1609)  
64 7/8"(1648)  
60 3/4"(1543)  
60"(1543)  
30 15/32"(774) [1]  
18 15/32"(469) [1]




CWAP303624




CWAP303624-2

67 11/32"(1711)  
68 7/8"(1749)  
64 3/4"(1645)  
64"(1626)  
30 15/32"(774) [1]  
22 15/32"(571) [1]




CWAP303628




CWAP303628-2

69 11/32"(1761)  
70 7/8"(1800)  
66 3/4"(1695)  
66"(1676)  
30 15/32"(774) [1]  
24 15/32"(622) [1]



CWAP303630



CWAP303630-2

**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS


Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**CUSTOM WOOD WINDOWS  
CUSTOM AWNING  
ELEVATIONS**


**30" WIDE X 40" HIGH PIC/AWNING COMBO**

MO BRICKMOLD	33 1/4"(845)	63 1/4"(1607)
MO FLAT CASING	36 5/16"(922)	66 5/16"(1684)
ROUGH OPENING	30 3/4"(781)	60 3/4"(1543)
FRAME SIZE	30"(762)	60"(1524)
DAYLIGHT OPENING	25 1/16"(637)	25 1/16"(637) [2]

61 11/32"(1558)  
62 7/8"(1597)  
58 3/4"(1492)  
56"(1473)  
34 15/32"(876) [1]  
12 15/32"(377) [1]




CWAP304018




CWAP304018-2

63 11/32"(1609)  
64 7/8"(1648)  
60 3/4"(1543)  
60"(1524)  
34 15/32"(876) [1]  
14 15/32"(366) [1]




CWAP304020




CWAP304020-2

67 11/32"(1711)  
68 7/8"(1749)  
64 3/4"(1645)  
64"(1626)  
34 15/32"(876) [1]  
18 15/32"(469) [1]



CWAP304024




CWAP304024-2

71 11/32"(1812)  
72 7/8"(1851)  
68 3/4"(1746)  
68"(1727)  
34 15/32"(876) [1]  
22 15/32"(571) [1]




CWAP304028




CWAP304028-2

73 11/32"(1863)  
74 7/8"(1902)  
70 3/4"(1797)  
70"(1778)  
34 15/32"(876) [1]  
24 15/32"(622) [1]



CWAP304030



CWAP304030-2

**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS


Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**CUSTOM WOOD WINDOWS**  
**CUSTOM AWNING**  
**ELEVATIONS**


**30" WIDE X 42" HIGH PIC/AWNING COMBO**

MO BRICKMOLD	33 1/4"(845)	63 1/4"(1607)
MO FLAT CASING	36 5/16"(922)	66 5/16"(1684)
ROUGH OPENING	30 3/4"(781)	60 3/4"(1543)
FRAME SIZE	30"(762)	60"(1524)
DAYLIGHT OPENING	25 1/16"(637)	25 1/16"(637) [2]

63 11/32"(1609)  
64 7/8"(1648)  
60 3/4"(1543)  
60"(1524)  
36 15/32"(926) [1]  
12 15/32"(317) [1]



CWAP304218




CWAP304218-2

65 11/32"(1660)  
66 7/8"(1699)  
62 3/4"(1594)  
62"(1575)  
36 15/32"(926) [1]  
14 15/32"(368) [1]




CWAP304220




CWAP304220-2

69 11/32"(1761)  
70 7/8"(1800)  
66 3/4"(1695)  
66"(1676)  
36 15/32"(926) [1]  
18 15/32"(469) [1]




CWAP304224




CWAP304224-2

73 11/32"(1863)  
74 7/8"(1902)  
70 3/4"(1797)  
70"(1778)  
36 15/32"(926) [1]  
22 15/32"(571) [1]




CWAP304228




CWAP304228-2

75 11/32"(1914)  
76 7/8"(1953)  
72 3/4"(1848)  
72"(1829)  
36 15/32"(926) [1]  
24 15/32"(622) [1]



CWAP304230



CWAP304230-2


**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS

Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


**CUSTOM WOOD WINDOWS**  
**CUSTOM AWNING**  
**ELEVATIONS**  
**30" WIDE X 48" HIGH PIC/AWNING COMBO**

MO BRICKMOLD	33 1/4"(845)	63 1/4"(1607)
MO FLAT CASING	36 5/16"(922)	66 5/16"(1684)
ROUGH OPENING	30 3/4"(781)	60 3/4"(1543)
FRAME SIZE	30"(762)	60"(1524)
DAYLIGHT OPENING	25 1/16"(637)	25 1/16"(637) [2]

68 11/32"(1761)  
70 7/8"(1800)  
66 3/4"(1695)  
66"(1676)  
42 15/32"(1079) [1]  
12 15/32"(317) [1]



CWAP304818




CWAP304818-2

71 11/32"(1812)  
72 7/8"(1851)  
68 3/4"(1746)  
68"(1727)  
42 15/32"(1079) [1]  
14 15/32"(368) [1]




CWAP304820




CWAP304820-2

75 11/32"(1914)  
76 7/8"(1953)  
72 3/4"(1848)  
72"(1829)  
42 15/32"(1079) [1]  
18 15/32"(469) [1]




CWAP304824




CWAP304824-2

79 11/32"(2015)  
80 7/8"(2054)  
76 3/4"(1949)  
76"(1930)  
42 15/32"(1079) [1]  
22 15/32"(571) [1]




CWAP304828




CWAP304828-2

81 11/32"(2066)  
82 7/8"(2105)  
78 3/4"(2000)  
78"(1981)  
42 15/32"(1079) [1]  
24 15/32"(622) [1]



CWAP304830



CWAP304830-2

**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS


Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizing. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**


**32" WIDE X 36" HIGH PIC/AWNING COMBIO**

MO BRICKMOLD	35 1/4"(895)	67 1/4"(1708)
MO FLAT CASING	38 5/16"(973)	70 5/16"(1786)
ROUGH OPENING	32 3/4"(832)	64 3/4"(1645)
FRAME SIZE	32"(813)	64"(1626)
DAYLIGHT OPENING	27 1/16"(687)	25 1/16"(637) [2]

57 11/32"(1457)  
68 7/8"(1748)  
64 3/4"(1641)  
30 15/32"(772) [1]  
12 15/32"(317) [1]




CWAP323618




CWAP323618-2

59 11/32"(1507)  
60 7/8"(1546)  
56 3/4"(1441)  
30 15/32"(772) [1]  
14 15/32"(368) [1]




CWAP323620




CWAP323620-2

63 11/32"(1609)  
64 7/8"(1648)  
60 3/4"(1543)  
30 15/32"(772) [1]  
18 15/32"(469) [1]




CWAP323624




CWAP323624-2

67 11/32"(1711)  
68 7/8"(1749)  
64 3/4"(1645)  
30 15/32"(772) [1]  
22 15/32"(571) [1]




CWAP323628




CWAP323628-2

69 11/32"(1761)  
70 7/8"(1800)  
66 3/4"(1686)  
30 15/32"(772) [1]  
24 15/32"(622) [1]



CWAP323630



CWAP323630-2

**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS

Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.




ELEVATIONS


32" WIDE X 40" HIGH PIC/AWNING COMBIO

MO BRICKMOLD	35 1/4"(895)	67 1/4"(1708)
MO FLAT CASING	38 5/16"(973)	70 5/16"(1786)
ROUGH OPENING	32 3/4"(832)	64 3/4"(1645)
FRAME SIZE	32"(813)	64"(1626)
DAYLIGHT OPENING	27 1/16"(687)	25 1/16"(637) [2]

61 11/32"(1558)  
62 7/8"(1597)  
58 3/4"(1492)  
58"(1473)  
34 15/32"(876) [1]  
12 15/32"(317) [1]




CWAP324018




CWAP324018-2

63 11/32"(1609)  
64 7/8"(1648)  
60 3/4"(1543)  
60"(1524)  
34 15/32"(876) [1]  
14 15/32"(368) [1]




CWAP324020




CWAP304020-2

67 11/32"(1711)  
68 7/8"(1749)  
64 3/4"(1645)  
64"(1628)  
34 15/32"(876) [1]  
18 15/32"(469) [1]




CWAP324024




CWAP324024-2

71 11/32"(1812)  
72 7/8"(1851)  
68 3/4"(1746)  
68"(1727)  
34 15/32"(876) [1]  
22 15/32"(571) [1]




CWAP324028




CWAP324028-2

73 11/32"(1863)  
74 7/8"(1902)  
70 3/4"(1797)  
70"(1778)  
34 15/32"(876) [1]  
24 15/32"(622) [1]



CWAP324030



CWAP324030-2


**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS

Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


**ELEVATIONS**  
**32" WIDE X 42" HIGH PIC/AWNING COMBIO**

MO BRICKMOLD	35 1/4"(895)	67 1/4"(1708)
MO FLAT CASING	38 5/16"(973)	70 5/16"(1786)
ROUGH OPENING	32 3/4"(832)	64 3/4"(1645)
FRAME SIZE	32"(813)	64"(1626)
DAYLIGHT OPENING	27 1/16"(687)	25 1/16"(637) [2]

63 11/32"(1609)  
64 7/8"(1648)  
60 3/4"(1543)  
60"(1524)  
36 15/32"(926) [1]  
12 15/32"(317) [1]




CWAP324218




CWAP324218-2

65 11/32"(1660)  
66 7/8"(1699)  
62 3/4"(1594)  
62"(1575)  
36 15/32"(926) [1]  
14 15/32"(368) [1]




CWAP324220




CWAP324220-2

69 11/32"(1761)  
70 7/8"(1800)  
66 3/4"(1695)  
66"(1676)  
36 15/32"(926) [1]  
18 15/32"(469) [1]




CWAP324224




CWAP324224-2

73 11/32"(1863)  
74 7/8"(1902)  
70 3/4"(1797)  
70"(1778)  
36 15/32"(926) [1]  
22 15/32"(571) [1]




CWAP324228




CWAP324228-2

75 11/32"(1914)  
76 7/8"(1953)  
72 3/4"(1848)  
72"(1829)  
36 15/32"(926) [1]  
24 15/32"(622) [1]



CWAP324230



CWAP324230-2


**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS

Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


**ELEVATIONS**  
**32" WIDE X 48" HIGH PIC/AWNING COMBO**

MO BRICKMOLD	35 1/4"(895)	67 1/4"(1708)
MO FLAT CASING	38 5/16"(973)	70 5/16"(1786)
ROUGH OPENING	32 3/4"(832)	64 3/4"(1645)
FRAME SIZE	32"(813)	64"(1626)
DAYLIGHT OPENING	27 1/16"(687)	25 1/16"(637) [2]

69 11/32"(1761)  
70 7/8"(1800)  
66 3/4"(1695)  
66"(1676)  
42 15/32"(1079) [1]  
12 15/32"(317) [1]




CWAP324818




CWAP324818-2

71 11/32"(1812)  
72 7/8"(1851)  
68 3/4"(1746)  
68"(1727)  
42 15/32"(1079) [1]  
14 15/32"(368) [1]



CWAP324820




CWAP324820-2

75 11/32"(1914)  
76 7/8"(1953)  
72 3/4"(1848)  
72"(1829)  
42 15/32"(1079) [1]  
18 15/32"(469) [1]




CWAP324824




CWAP324824-2

79 11/32"(2015)  
80 7/8"(2054)  
76 3/4"(1949)  
76"(1930)  
42 15/32"(1079) [1]  
22 15/32"(571) [1]




CWAP324828




CWAP324828-2

81 11/32"(2066)  
82 7/8"(2105)  
78 3/4"(2000)  
78"(1981)  
42 15/32"(1079) [1]  
24 15/32"(622) [1]



CWAP324830



CWAP324830-2


**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS

Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


**ELEVATIONS**  
**36" WIDE X 36" HIGH PIC/AWNING COMBO**

MO BRICKMOLD	39 1/4"(997)	75 1/4"(1911)
MO FLAT CASING	42 5/16"(1075)	78 5/16"(1989)
ROUGH OPENING	36 3/4"(933)	72 3/4"(1848)
FRAME SIZE	36"(914)	72"(1829)
DAYLIGHT OPENING	31 1/16"(789)	31 1/16"(789) [2]

57 11/32"(1457)  
58 7/8"(1495)  
54 3/4"(1391)  
54"(1372)  
30 15/32"(774) [1]  
12 15/32"(317) [1]




CWAP363618




CWAP363618-2

59 11/32"(1507)  
60 7/8"(1546)  
56 3/4"(1441)  
56"(1422)  
30 15/32"(774) [1]  
14 15/32"(368) [1]




CWAP363620



CWAP363620-2

63 11/32"(1609)  
64 7/8"(1648)  
60 3/4"(1543)  
60"(1543)  
30 15/32"(774) [1]  
18 15/32"(469) [1]




CWAP363624



CWAP363624-2

67 11/32"(1711)  
68 7/8"(1749)  
64 3/4"(1645)  
64"(1626)  
30 15/32"(774) [1]  
22 15/32"(571) [1]




CWAP363628




CWAP363628-2

69 11/32"(1761)  
70 7/8"(1800)  
66 3/4"(1695)  
66"(1676)  
30 15/32"(774) [1]  
24 15/32"(622) [1]



CWAP363630



CWAP363630-2

**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS


Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**


**36" WIDE X 40" HIGH PIC/AWNING COMBIO**

MO BRICKMOLD	39 1/4"(997)	75 1/4"(1911)
MO FLAT CASING	42 5/16"(1075)	78 5/16"(1989)
ROUGH OPENING	36 3/4"(933)	72 3/4"(1848)
FRAME SIZE	36"(914)	72"(1829)
DAYLIGHT OPENING	31 1/16"(789)	31 1/16"(789) [2]

61 11/32"(1558)  
62 7/8"(1597)  
58 3/4"(1492)  
36"(914)  
34 15/32"(876) [1]  
12 15/32"(317) [1]




CWAP364018




CWAP364018-2

63 11/32"(1609)  
64 7/8"(1648)  
60 3/4"(1543)  
60"(1524)  
34 15/32"(876) [1]  
14 15/32"(366) [1]




CWAP364020




CWAP364020-2

67 11/32"(1711)  
68 7/8"(1749)  
64 3/4"(1645)  
64"(1626)  
34 15/32"(876) [1]  
18 15/32"(469) [1]




CWAP364024




CWAP364024-2

71 11/32"(1812)  
72 7/8"(1851)  
68 3/4"(1746)  
68"(1727)  
34 15/32"(876) [1]  
22 15/32"(571) [1]




CWAP364028




CWAP364028-2

73 11/32"(1863)  
74 7/8"(1902)  
70 3/4"(1797)  
70"(1778)  
34 15/32"(876) [1]  
24 15/32"(622) [1]



CWAP364030













CWAP364030-2

**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS

Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS  
36" WIDE X 42" HIGH PIC/AWNING COMBO**

MO BRICKMOLD	39 1/4"(997)	75 1/4"(1911)
MO FLAT CASING	42 5/16"(1075)	78 5/16"(1989)
ROUGH OPENING	36 3/4"(933)	72 3/4"(1848)
FRAME SIZE	36"(914)	72"(1829)
DAYLIGHT OPENING	31 1/16"(789)	31 1/16"(789) [2]

63 11/32"(1609) 64 7/8"(1648) 60 3/4"(1543) 60"(1524) 36 15/32"(926) [1] 12 15/32"(317) [1]		
	CWAP364218	CWAP364218-2
65 11/32"(1660) 66 7/8"(1699) 62 3/4"(1594) 62"(1575) 36 15/32"(926) [1] 14 15/32"(368) [1]		
	CWAP364220	CWAP364220-2
69 11/32"(1761) 70 7/8"(1800) 66 3/4"(1695) 66"(1676) 36 15/32"(926) [1] 18 15/32"(469) [1]		
	CWAP364224	CWAP364224-2
73 11/32"(1863) 74 7/8"(1902) 70 3/4"(1797) 70"(1778) 36 15/32"(926) [1] 22 15/32"(571) [1]		
	CWAP364228	CWAP364228-2
75 11/32"(1914) 76 7/8"(1953) 72 3/4"(1848) 72"(1829) 36 15/32"(926) [1] 24 15/32"(622) [1]		
	CWAP364230	CWAP364230-2

**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS


Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS


36" WIDE X 48" HIGH PIC/AWNING COMBIO

MO BRICKMOLD	39 1/4"(997)	75 1/4"(1911)
MO FLAT CASING	42 5/16"(1075)	78 5/16"(1989)
ROUGH OPENING	36 3/4"(933)	72 3/4"(1848)
FRAME SIZE	36"(914)	72"(1829)
DAYLIGHT OPENING	31 1/16"(789)	31 1/16"(789) [2]

69 11/32"(1761)  
70 7/8"(1800)  
66 3/4"(1695)  
66"(1676)  
42 15/32"(1079) [1]  
12 15/32"(317) [1]




CWAP364818




CWAP364818-2

71 11/32"(1812)  
72 7/8"(1861)  
68 3/4"(1746)  
68"(1727)  
42 15/32"(1079) [1]  
14 15/32"(368) [1]




CWAP364820




CWAP364820-2

75 11/32"(1914)  
76 7/8"(1953)  
72 3/4"(1848)  
72"(1829)  
42 15/32"(1079) [1]  
16 15/32"(469) [1]




CWAP364824




CWAP364824-2

79 11/32"(2015)  
80 7/8"(2054)  
76 3/4"(1948)  
76"(1930)  
42 15/32"(1079) [1]  
22 15/32"(571) [1]




CWAP364828




CWAP364828-2

81 11/32"(2068)  
82 7/8"(2105)  
78 3/4"(2000)  
78"(1981)  
42 15/32"(1079) [1]  
24 15/32"(622) [1]



CWAP364830



CWAP364830-2


**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS

Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS  
42" WIDE X 36" HIGH PIC/AWNING COMBO**

MO BRICKMOLD	45 1/4"(1149)	87 1/4"(2216)
MO FLAT CASING	48 5/16"(1227)	90 5/16"(2294)
ROUGH OPENING	42 3/4"(1086)	84 3/4"(2153)
FRAME SIZE	42"(1067)	84"(2134)
DAYLIGHT OPENING	37 1/16"(941)	37 1/16"(941) [2]

57 11/32"(1457)  
58 7/8"(1495)  
54 3/4"(1391)  
54"(1372)  
30 15/32"(774) [1]  
12 15/32"(317) [1]




CWAP423618



CWAP423618-2

59 11/32"(1507)  
60 7/8"(1546)  
56 3/4"(1441)  
56"(1422)  
30 15/32"(774) [1]  
14 15/32"(388) [1]




CWAP423620



CWAP423620-2

63 11/32"(1609)  
64 7/8"(1648)  
60 3/4"(1543)  
60"(1543)  
30 15/32"(774) [1]  
18 15/32"(469) [1]




CWAP423624



CWAP423624-2

67 11/32"(1711)  
68 7/8"(1749)  
64 3/4"(1645)  
64"(1626)  
30 15/32"(774) [1]  
22 15/32"(571) [1]




CWAP423628



CWAP423628-2

69 11/32"(1761)  
70 7/8"(1800)  
66 3/4"(1695)  
66"(1676)  
30 15/32"(774) [1]  
24 15/32"(622) [1]



CWAP423630



CWAP423630-2

**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS


Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.




**ELEVATIONS**  
**42" WIDE X 40" HIGH PIC/AWNING COMBO**

MO BRICKMOLD	45 1/4"(1149)	87 1/4"(2216)
MO FLAT CASING	48 5/16"(1227)	90 5/16"(2294)
ROUGH OPENING	42 3/4"(1086)	84 3/4"(2153)
FRAME SIZE	42"(1067)	84"(2134)
DAYLIGHT OPENING	37 1/16"(941)	37 1/16"(941) [2]

61 11/32"(1558)  
62 7/8"(1597)  
58 3/4"(1492)  
68"(1473)  
34 15/32"(876) [1]  
12 15/32"(317) [1]




CWAP424018



CWAP424018-2

63 11/32"(1609)  
64 7/8"(1648)  
60 3/4"(1543)  
60"(1524)  
34 15/32"(876) [1]  
14 15/32"(368) [1]




CWAP424020




CWAP424020-2

67 11/32"(1711)  
68 7/8"(1749)  
64 3/4"(1645)  
64"(1626)  
34 15/32"(876) [1]  
18 15/32"(469) [1]




CWAP424024



CWAP424024-2

71 11/32"(1812)  
72 7/8"(1851)  
68 3/4"(1746)  
68"(1727)  
34 15/32"(876) [1]  
22 15/32"(571) [1]




CWAP424028




CWAP424028-2

73 11/32"(1863)  
74 7/8"(1902)  
70 3/4"(1797)  
70"(1778)  
34 15/32"(876) [1]  
24 15/32"(622) [1]



CWAP424030



CWAP424030-2


**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS

Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


**ELEVATIONS**  
**42" WIDE X 42" HIGH PIC/AWNING COMBO**

MO BRICKMOLD	45 1/4"(1149)	87 1/4"(2216)
MO FLAT CASING	48 5/16"(1227)	90 5/16"(2294)
ROUGH OPENING	42 3/4"(1086)	84 3/4"(2153)
FRAME SIZE	42"(1067)	84"(2134)
DAYLIGHT OPENING	37 1/16"(941)	37 1/16"(941) [2]

63 11/32"(1609)  
64 7/8"(1648)  
60 3/4"(1543)  
60"(1524)  
36 15/32"(926) [1]  
12 15/32"(317) [1]




CWAP424218




CWAP424218-2

65 11/32"(1660)  
66 7/8"(1699)  
62 3/4"(1594)  
62"(1575)  
36 15/32"(926) [1]  
14 15/32"(368) [1]




CWAP424220




CWAP424220-2

69 11/32"(1761)  
70 7/8"(1800)  
66 3/4"(1695)  
66"(1676)  
36 15/32"(926) [1]  
18 15/32"(469) [1]




CWAP424224



CWAP424224-2

73 11/32"(1863)  
74 7/8"(1902)  
70 3/4"(1797)  
70"(1778)  
36 15/32"(926) [1]  
22 15/32"(571) [1]




CWAP424228




CWAP424228-2

75 11/32"(1914)  
76 7/8"(1953)  
72 3/4"(1848)  
72"(1829)  
36 15/32"(926) [1]  
24 15/32"(622) [1]



CWAP424230



CWAP424230-2


**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS

Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


**ELEVATIONS  
42" WIDE X 48" HIGH PIC/AWNING COMBO**

MO BRICKMOLD	45 1/4"(1149)	87 1/4"(2216)
MO FLAT CASING	48 5/16"(1227)	90 5/16"(2294)
ROUGH OPENING	42 3/4"(1086)	84 3/4"(2153)
FRAME SIZE	42"(1067)	84"(2134)
DAYLIGHT OPENING	37 1/16"(941)	37 1/16"(941) [2]

69 11/32"(1761)  
70 7/8"(1800)  
66 3/4"(1678)  
42 15/32"(1079) [1]  
12 15/32"(317) [1]




CWAP424818




CWAP424818-2

71 11/32"(1812)  
71 7/8"(1851)  
68 1/2"(1727)  
42 15/32"(1079) [1]  
14 15/32"(368) [1]




CWAP424820




CWAP424820-2

75 11/32"(1914)  
75 7/8"(1953)  
72 1/2"(1828)  
42 15/32"(1079) [1]  
18 15/32"(469) [1]




CWAP424824




CWAP424824-2

79 11/32"(2015)  
80 7/8"(2054)  
76 3/4"(1930)  
42 15/32"(1079) [1]  
22 15/32"(571) [1]




CWAP424828




CWAP424828-2

81 11/32"(2066)  
82 7/8"(2105)  
78 3/4"(1981)  
42 15/32"(1079) [1]  
24 15/32"(622) [1]



CWAP424830













CWAP424830-2

**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS

Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**48" WIDE X 36" HIGH PIC/AWNING COMBO**

MO BRICKMOLD	51 1/4"(1302)	99 1/4"(2521)
MO FLAT CASING	54 5/16"(1380)	102 5/16"(2599)
ROUGH OPENING	48 3/4"(1238)	96 3/4"(2457)
FRAME SIZE	48"(1219)	96"(2438)
DAYLIGHT OPENING	43 1/16"(1094)	43 1/16"(1094) [2]

57 11/32"(1457) 58 7/8"(1495) 54 3/4"(1391) 64"(1626) 30 15/32"(774) [1] 12 15/32"(317) [1]		
	CWAP483618	CWAP483618-2
59 11/32"(1507) 60 7/8"(1546) 56 3/4"(1441) 56"(1422) 30 15/32"(774) [1] 14 15/32"(368) [1]		
	CWAP483620	CWAP483620-2
63 11/32"(1609) 64 7/8"(1648) 60 3/4"(1543) 60"(1543) 30 15/32"(774) [1] 18 15/32"(469) [1]		
	CWAP483624	CWAP483624-2
67 11/32"(1711) 68 7/8"(1749) 64 3/4"(1645) 64"(1626) 30 15/32"(774) [1] 22 15/32"(571) [1]		
	CWAP483628	CWAP483628-2
69 11/32"(1761) 70 7/8"(1800) 66 3/4"(1695) 66"(1676) 30 15/32"(774) [1] 24 15/32"(622) [1]		
	CWAP483630	CWAP483630-2


**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS

Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS**  
**48" WIDE X 40" HIGH PIC/AWNING COMBO**

MO BRICKMOLD	51 1/4"(1302)	99 1/4"(2521)
MO FLAT CASING	54 5/16"(1380)	102 5/16"(2599)
ROUGH OPENING	48 3/4"(1238)	96 3/4"(2457)
FRAME SIZE	48"(1219)	96"(2438)
DAYLIGHT OPENING	43 1/16"(1094)	43 1/16"(1094) [2]

61 11/32"(1558)  
62 7/8"(1597)  
58 3/4"(1492)  
58"(1473)  
34 15/32"(876) [1]  
12 15/32"(377) [1]




CWAP484018




CWAP484018-2

63 11/32"(1609)  
64 7/8"(1648)  
60 3/4"(1543)  
60"(1524)  
34 15/32"(876) [1]  
14 15/32"(388) [1]




CWAP484020




CWAP484020-2

67 11/32"(1711)  
68 7/8"(1749)  
64 3/4"(1645)  
64"(1628)  
34 15/32"(876) [1]  
18 15/32"(489) [1]




CWAP484024




CWAP484024-2

71 11/32"(1812)  
72 7/8"(1851)  
68 3/4"(1746)  
68"(1727)  
34 15/32"(876) [1]  
22 15/32"(571) [1]




CWAP484028




CWAP484028-2

73 11/32"(1863)  
74 7/8"(1902)  
70 3/4"(1797)  
70"(1778)  
34 15/32"(876) [1]  
24 15/32"(622) [1]



CWAP484030



CWAP484030-2


**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS

Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


**ELEVATIONS**  
**48" WIDE X 42" HIGH PIC/AWNING COMBO**

MO BRICKMOLD	51 1/4"(1302)	99 1/4"(2521)
MO FLAT CASING	54 5/16"(1380)	102 5/16"(2599)
ROUGH OPENING	48 3/4"(1238)	96 3/4"(2457)
FRAME SIZE	48"(1219)	96"(2438)
DAYLIGHT OPENING	43 1/16"(1094)	43 1/16"(1094) [2]

63 11/32"(1609)  
64 7/8"(1648)  
60 3/4"(1543)  
60"(1524)  
36 15/32"(926) [1]  
12 15/32"(317) [1]




CWAP484218




CWAP484218-2

66 11/32"(1660)  
66 7/8"(1699)  
62 3/4"(1594)  
62"(1575)  
36 15/32"(926) [1]  
14 15/32"(368) [1]




CWAP484220




CWAP484220-2

69 11/32"(1761)  
70 7/8"(1800)  
66 3/4"(1695)  
66"(1676)  
36 15/32"(926) [1]  
18 15/32"(469) [1]




CWAP484224




CWAP484224-2

73 11/32"(1863)  
74 7/8"(1902)  
70 3/4"(1797)  
70"(1778)  
36 15/32"(926) [1]  
22 15/32"(571) [1]




CWAP484228



CWAP484228-2

75 11/32"(1914)  
76 7/8"(1953)  
72 3/4"(1848)  
72"(1829)  
36 15/32"(926) [1]  
24 15/32"(622) [1]



CWAP484230



CWAP484230-2


**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS

Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


**ELEVATIONS**  
**48" WIDE X 48" HIGH PIC/AWNING COMBO**

MO BRICKMOLD	51 1/4"(1302)	99 1/4"(2521)
MO FLAT CASING	54 5/16"(1380)	102 5/16"(2599)
ROUGH OPENING	48 3/4"(1238)	96 3/4"(2457)
FRAME SIZE	48"(1219)	96"(2438)
DAYLIGHT OPENING	43 1/16"(1094)	43 1/16"(1094) [2]

69 11/32"(1761)  
70 7/8"(1800)  
66 3/4"(1685)  
66"(1676)  
42 15/32"(1079) [1]  
12 15/32"(317) [1]




CWAP484818




CWAP484818-2

71 11/32"(1812)  
72 7/8"(1851)  
68 3/4"(1746)  
68"(1727)  
42 15/32"(1079) [1]  
14 15/32"(368) [1]




CWAP484820




CWAP484820-2

75 11/32"(1914)  
76 7/8"(1953)  
72 3/4"(1848)  
72"(1829)  
42 15/32"(1079) [1]  
18 15/32"(469) [1]




CWAP484824




CWAP484824-2

79 11/32"(2015)  
80 7/8"(2054)  
76 3/4"(1949)  
76"(1930)  
42 15/32"(1079) [1]  
22 15/32"(571) [1]




CWAP484828




CWAP484828-2

81 11/32"(2066)  
82 7/8"(2105)  
78 3/4"(2000)  
78"(1981)  
42 15/32"(1079) [1]  
24 15/32"(622) [1]



CWAP484830



CWAP484830-2

**ELEVATION SYMBOL LEGEND:**  
M.O. = MASORNY OPENING  
VALUES IN ( ) ARE IN MILLIMETER CONVERSIONS

Note: Elevations shown include exterior sillnose and brickmold trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.