
TABLE OF CONTENTS

Direct Set

Full Rd	15-2
Half Rd	15-3
Inswing PD Half Rd Unit	15-5
Outswing PD Half Rd Unit.	15-6
PDH Qtr Rd	15-7
PDH Half Rd	15-8
Casement Qtr Rd	15-9
Octagon	15-10

In-Sash

Full Rd	15-11
Half Rd	15-12
Inswing PD Half Rd Unit	15-13
Outswing PD Half Rd Unit.	15-14
PDH Qtr Rd	15-15
PDH Half Rd	15-16
Casement Qtr Rd	15-17
Octagon	15-18

ELEVATIONS
DIRECT SET
FULL ROUND UNITS


MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

23 1/4"(591)
26 5/16"(668)
20 3/4"(527)
20"(508)
16 7/32"(412)




CC20 FRDS

27 1/4"(692)
30 5/16"(770)
24 3/4"(629)
24"(610)
20 7/32"(514)




CC24 FRDS

33 1/4"(845)
36 5/16"(922)
30 3/4"(781)
30"(762)
26 7/32"(666)




CC30 FRDS

35 1/4"(895)
38 5/16"(973)
32 3/4"(832)
32"(813)
28 7/32"(717)



CC32 FRDS


39 1/4"(997)
42 5/16"(1074)
36 3/4"(933)
36"(914)
32 7/32"(818)



CC36 FRDS


MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

45 1/4"(1149)
48 5/16"(1227)
42 3/4"(1086)
42"(1067)
38 7/32"(971)




CC42 FRDS

51 1/4"(1302)
54 5/16"(1379)
48 3/4"(1238)
48"(1219)
44 7/32"(1123)




CC48 FRDS

57 1/4"(1454)
60 5/16"(1532)
54 3/4"(1391)
54"(1372)
50 7/32"(1276)



CC54 FRDS

63 1/4"(1607)
66 5/16"(1684)
60 3/4"(1543)
60"(1524)
56 7/32"(1428)



CC60 FRDS

ELEVATION SYMBOL LEGEND:
M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES DESIGN PERFORMANCE (PG) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

CUSTOM CLAD WINDOWS
CUSTOM GEO
ELEVATIONS
DIRECT SET
HALF ROUND UNITS

MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	21 1/4"(540) 24 5/16"(617) 18 3/4"(476) 18"(457) 13 3/4"(349)	23 1/4"(591) 26 5/16"(668) 20 3/4"(527) 20"(508) 15 3/4"(400)	27 1/4"(692) 30 5/16"(770) 24 3/4"(629) 24"(610) 19 3/4"(502)	31 1/4"(794) 34 5/16"(871) 28 3/4"(730) 28"(711) 23 3/4"(603)	33 1/4"(845) 36 5/16"(922) 30 3/4"(781) 30"(762) 25 3/4"(654)
	11 1/2"(292) 9 1/2"(241) 9 3/4"(248) 9"(239) 4 13/64"(107)	12 1/2"(318) 14"(296) 10 3/4"(273) 10"(254) 5 13/64"(132)	14 1/2"(368) 16"(406) 12 3/4"(324) 12"(305) 7 13/64"(183)	16 1/2"(419) 18 1/4"(457) 14 3/4"(375) 14"(356) 9 13/64"(233)	17 1/2"(445) 19"(483) 15 3/4"(400) 15"(381) 10 13/64"(259)
	CC18HRDS	CC20HRDS	CC24HRDS	CC28HRDS	CC30HRDS

MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	35 1/4"(895) 38 5/16"(973) 32 3/4"(832) 32"(813) 27 3/4"(705)	39 1/4"(997) 42 5/16"(1074) 36 3/4"(933) 36"(914) 31 3/4"(806)	43 1/4"(1099) 46 5/16"(1176) 40 3/4"(1035) 40"(1016) 35 3/4"(908)	45 1/4"(1149) 48 5/16"(1227) 42 3/4"(1086) 42"(1067) 37 3/4"(959)
	18 1/2"(470) 20"(509) 16 3/4"(425) 16"(406) 11 13/64"(284)	20 1/2"(521) 22"(559) 18 3/4"(476) 18"(457) 13 13/64"(335)	22 1/2"(571) 24"(610) 20 3/4"(527) 20"(508) 15 13/64"(386)	23 1/2"(597) 25"(635) 21 3/4"(552) 21"(533) 16 13/64"(411)
	CC32HRDS	CC36HRDS	CC40HRDS	CC42HRDS

MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	51 1/4"(1302) 54 5/16"(1379) 48 3/4"(1238) 48"(1219) 43 3/4"(1111)	57 1/4"(1454) 60 5/16"(1532) 54 3/4"(1391) 54"(1372) 49 3/4"(1264)	59 1/4"(1505) 62 5/16"(1582) 56 3/4"(1441) 56"(1422) 51 3/4"(1314)
	26 1/2"(673) 28 1/4"(711) 24 3/4"(629) 24"(610) 19 13/64"(488)	29 1/2"(749) 31 1/2"(787) 27 3/4"(705) 27"(686) 22 13/64"(564)	30 1/2"(775) 32"(813) 28 3/4"(730) 28"(711) 23 13/64"(589)
	CC48HRDS	CC54HRDS	CC56HRDS

MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	63 1/4"(1607) 66 5/16"(1684) 60 3/4"(1543) 60"(1524) 55 3/4"(1416)	67 1/4"(1708) 70 5/16"(1786) 64 3/4"(1645) 64"(1626) 59 3/4"(1518)	69 1/4"(1759) 72 5/16"(1836) 66 3/4"(1695) 66"(1676) 61 3/4"(1568)
	32 1/2"(826) 34 1/2"(864) 30 3/4"(781) 30"(762) 25 13/64"(640)	34 1/2"(876) 36"(914) 32 3/4"(832) 32"(813) 27 13/64"(691)	35 1/2"(902) 37"(940) 33 3/4"(857) 33"(838) 28 13/64"(716)
	CC60HRDS	CC64HRDS	CC66HRDS

MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	75 1/4"(1911) 78 5/16"(1989) 72 3/4"(1848) 72"(1829) 67 3/4"(1721)	87 1/4"(2216) 90 5/16"(2294) 84 3/4"(2153) 84"(2134) 79 3/4"(2026)
	38 1/2"(978) 40 1/2"(1016) 36 3/4"(933) 36"(914) 31 13/64"(792)	44 1/2"(1130) 46"(1168) 42 3/4"(1086) 42"(1067) 37 13/64"(945)
	CC72HRDS	CC84HRDS

ELEVATION SYMBOL LEGEND:
M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

CUSTOM CLAD WINDOWS
CUSTOM GEO


ELEVATIONS
DIRECT SET
HALF ROUND UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

93 1/4"(2369)
96 5/16"(2446)
90 3/4"(2305)
90"(2218)
85 3/4"(2178)


99 1/4"(2521)
102 5/16"(2598)
96 3/4"(2457)
96"(2438)
91 3/4"(2330)

47 1/2"(1207)
49"(1245)
45 3/4"(1162)
45"(1143)
40 13/64"(1021)

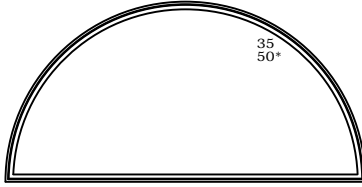

CC90HRDS

50 1/2"(1283)
52"(1321)
48 3/4"(1238)
48"(1219)
43 13/64"(1097)

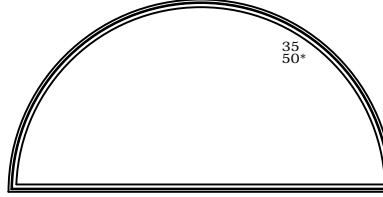

CC96HRDS

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS
DIRECT SET
IN-SWING HALF ROUND UNITS**


MO BRICKMOLD 26 11/16"(678)
MO FLAT CASING 29 3/4"(755)
ROUGH OPENING 24 3/16"(614)
FRAME SIZE 23 7/16"(595)
DAYLIGHT OPENING 19 17/64"(489)

14 1/4"(361)
15 3/4"(399)
12 1/2"(318)
11 3/4"(298)
7 59/64"(201)




CCIPD20HRDS

17 1/4"(437)
18 3/4"(475)
15 1/2"(394)
14 3/4"(374)
10 59/64"(277)



CCIPD26HRDS

18 1/4"(463)
19 3/4"(501)
16 1/2"(419)
15 3/4"(399)
11 59/64"(303)



CCIPD28HRDS

20 1/4"(514)
21 3/4"(552)
18 1/2"(470)
17 3/4"(450)
13 59/64"(354)



CCIPD30HRDS


25 13/16"(656)
27 5/16"(694)
24 1/16"(611)
23 1/16"(602)
19 33/64"(496)



CCIPD40HRDS


MO BRICKMOLD 61 7/8"(1572)
MO FLAT CASING 64 15/16"(1649)
ROUGH OPENING 59 3/8"(1508)
FRAME SIZE 58 5/8"(1489)
DAYLIGHT OPENING 54 11/16"(1389)

31 13/16"(808)
33 5/16"(846)
30 1/16"(764)
29 5/16"(745)
25 33/64"(648)




CCIPD50HRDS

33 13/16"(869)
35 5/16"(897)
32 1/16"(814)
31 13/16"(795)
27 33/64"(699)



CCIPD54HRDS


37 13/16"(960)
39 5/16"(998)
36 1/16"(916)
35 5/16"(897)
31 33/64"(800)



CCIPD60HRDS

MO BRICKMOLD 28 11/16"(729)
MO FLAT CASING 31 3/4"(806)
ROUGH OPENING 26 3/16"(665)
FRAME SIZE 25 7/16"(646)
DAYLIGHT OPENING 21 19/64"(541)

15 1/4"(387)
16 3/4"(425)
13 1/2"(343)
12 3/4"(323)
8 59/64"(227)



CCIPD20HRDS

19 1/4"(488)
20 3/4"(526)
17 1/2"(445)
16 3/4"(425)
12 59/64"(328)



CCIPD28HRDS

21 1/4"(539)
22 3/4"(577)
19 1/2"(495)
18 3/4"(475)
14 59/64"(379)



CCIPD30HRDS


24 1/4"(615)
25 3/4"(653)
22 1/2"(572)
21 3/4"(552)
17 59/64"(455)



CCIPD36HRDS


MO BRICKMOLD 53 7/8"(1368)
MO FLAT CASING 56 15/16"(1446)
ROUGH OPENING 51 3/8"(1305)
FRAME SIZE 50 5/8"(1286)
DAYLIGHT OPENING 46 43/64"(1185)

27 13/16"(706)
29 5/16"(745)
26 1/16"(662)
25 5/16"(643)
21 33/64"(546)




CCIPD40HRDS

35 13/16"(910)
37 5/16"(948)
34 1/16"(865)
33 5/16"(846)
29 33/64"(750)



CCIPD54HRDS


39 13/16"(1011)
41 5/16"(1049)
38 1/16"(967)
37 5/16"(948)
33 33/64"(851)



CCIPD60HRDS

MO BRICKMOLD 89 7/8"(2283)
MO FLAT CASING 92 1/2"(2360)
ROUGH OPENING 87 3/8"(2219)
FRAME SIZE 86 5/8"(2200)
DAYLIGHT OPENING 82 47/64"(2102)

45 13/16"(1164)
47 5/16"(1202)
44 1/16"(1119)
43 5/16"(1100)
39 33/64"(1004)

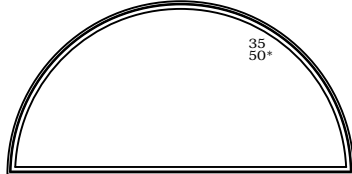

CCIPD70HRDS

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


**CUSTOM CLAD WINDOWS
CUSTOM GEO**

**ELEVATIONS
DIRECT SET
OUT-SWING HALF ROUND UNITS**

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


50 7/16"(1281)
53 1/2"(1359)
47 15/16"(1218)
47 3/16"(1199)
43 7/32"(1117)

26 1/2"(673)
27"(686)
24 1/8"(619)
23 5/8"(603)
20 13/64"(513)




CCOPD40HRDS

32 7/8"(834)
35 7/8"(912)
30 3/8"(772)
29 9/16"(752)
25 5/16"(656)



CCOPD50HRDS

34 1/8"(866)
35 5/8"(904)
32 3/8"(822)
31 5/8"(803)
27 5/16"(707)




CCOPD54HRDS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

74 7/16"(1891)
77 1/2"(1968)
71 15/16"(1827)
71 3/16"(1808)
67 1/4"(1708)

38 1/8"(968)
39 5/8"(1006)
36 3/8"(924)
35 1/8"(908)
31 5/16"(808)



CCOPD60HRDS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

29 1/4"(743)
32 5/16"(820)
26 3/4"(679)
26"(660)
21 7/8"(556)

15 1/2"(394)
14 1/2"(368)
13 3/4"(349)
13 1/8"(333)
9 13/64"(234)



CCOPDT20HRDS

37 1/4"(946)
40 5/16"(1024)
34 3/4"(883)
34"(864)
29 7/8"(759)

19 1/2"(485)
21"(533)
17 3/4"(451)
17"(432)
13 13/64"(335)



CCOPDT28HRDS

41 1/4"(1048)
44 5/16"(1125)
38 3/4"(984)
38"(965)
33 7/8"(860)


21 1/2"(546)
23"(584)
19 3/4"(502)
19 1/8"(483)
15 13/64"(386)



CCOPDT30HRDS

47 1/4"(1200)
50 5/16"(1278)
44 3/4"(1137)
44"(1118)
39 7/8"(1013)

24 1/2"(622)
26"(660)
22 3/4"(578)
22"(559)
18 13/64"(462)




CCOPDT36HRDS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

54 7/16"(1383)
57 1/2"(1460)
51 15/16"(1319)
51 3/16"(1300)
47 15/64"(1200)


28 1/2"(724)
29 1/2"(737)
26 1/8"(668)
25 1/8"(651)
21 5/16"(554)



CCOPDT40HRDS

70 7/16"(1789)
73 1/2"(1867)
67 15/16"(1726)
67 3/16"(1707)
63 15/64"(1606)


36 1/16"(917)
37 9/16"(955)
34 3/8"(873)
33 3/8"(857)
29 5/16"(757)



CCOPDT54HRDS

78 7/16"(1992)
81 1/2"(2070)
75 15/16"(1929)
75 3/16"(1910)
71 15/64"(1809)

40 1/16"(1018)
41 9/16"(1056)
38 3/8"(975)
37 5/8"(956)
33 5/16"(856)




CCOPDT60HRDS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

90 7/16"(2297)
93 1/2"(2375)
87 15/16"(2234)
87 3/16"(2215)
83 15/64"(2114)

46 1/16"(1171)
47 9/16"(1209)
44 1/2"(1127)
43 5/8"(1109)
39 5/16"(1011)

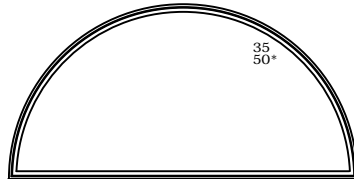

CCOPDT70HRDS

ELEVATION SYMBOL LEGEND:


M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS
DIRECT SET
PDH QUARTER ROUND UNITS**


MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

24 5/8"(625)
27 11/16"(703)
22 1/8"(562)
21 3/8"(543)
17 1/2"(445)




CCD21QRDS

27 7/8"(708)
29 3/8"(746)
26 1/8"(664)
25 3/8"(645)
21 33/64"(547)



CCD25QRDS


31 7/8"(810)
33 3/8"(848)
30 1/8"(765)
29 3/8"(746)
25 17/32"(648)



CCD29QRDS


MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

36 5/8"(930)
39 11/16"(1008)
34 1/8"(867)
33 3/8"(848)
29 35/64"(751)



CCD33QRDS


39 7/8"(1013)
41 3/8"(1051)
38 1/8"(968)
37 3/8"(949)
33 35/64"(842)



CCD37QRDS


MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

44 5/8"(1133)
47 11/16"(1211)
42 1/8"(1070)
41 3/8"(1051)
41 35/64"(954)

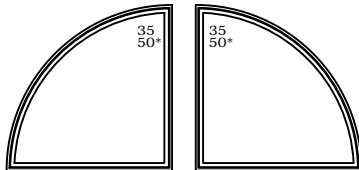

CCD41QRDS

47 7/8"(1216)
49 3/8"(1254)
46 1/8"(1172)
45 3/8"(1153)
41 35/64"(1055)

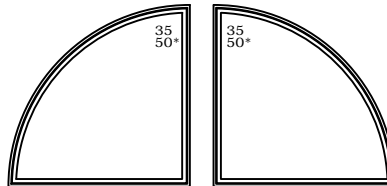

CCD45QRDS

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O. (Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
DIRECT SET
PDH HALF ROUND UNITS


MO BRICKMOLD 24 5/8"(625)
MO FLAT CASING 27 11/16"(703)
ROUGH OPENING 22 1/8"(562)
FRAME SIZE 21 3/8"(543)
DAYLIGHT OPENING 17 5/32"(436)

13 3/16"(336)
14 1/16"(374)
11 7/16"(290)
10 1/16"(272)
6 5/16"(175)




CCD21HRDS

15 3/16"(386)
16 11/16"(424)
13 7/16"(341)
12 11/16"(322)
8 5/16"(226)




CCD25HRDS

17 3/16"(437)
18 11/16"(475)
15 7/16"(382)
14 11/16"(373)
10 5/16"(277)



CCD29HRDS

19 3/16"(487)
20 11/16"(525)
17 7/16"(443)
16 11/16"(424)
12 5/16"(327)



CCD33HRDS

36 5/8"(930)
39 11/16"(1008)
34 1/8"(867)
33 3/8"(848)
29 5/32"(741)

21 3/16"(538)
22 11/16"(576)
19 7/16"(494)
18 11/16"(475)
14 5/16"(378)



CCD37HRDS

40 5/8"(1032)
43 11/16"(1109)
38 1/8"(968)
37 3/8"(949)
33 5/32"(842)

MO BRICKMOLD 44 5/8"(1133)
MO FLAT CASING 47 11/16"(1211)
ROUGH OPENING 42 1/8"(1064)
FRAME SIZE 41 3/8"(1051)
DAYLIGHT OPENING 37 5/32"(944)

23 3/16"(589)
24 1/16"(627)
21 7/16"(544)
20 1/16"(525)
16 5/16"(428)



CCD41HRDS

25 3/16"(640)
26 11/16"(678)
23 7/16"(595)
22 11/16"(576)
18 5/16"(480)



CCD45HRDS

23 7/8"(606)
25 3/8"(645)
22 1/8"(562)
21 3/8"(543)
17 3/16"(446)



CCD21-2HRDS

27 7/8"(708)
28 3/8"(746)
25 1/8"(663)
25 3/8"(645)
21 3/16"(548)



CCD25-2HRDS


48 5/8"(1235)
51 11/16"(1313)
46 1/8"(1165)
45 3/8"(1153)
41 5/32"(1045)

46"(1168)
49 1/16"(1246)
43 1/2"(1105)
42 3/4"(1088)
38 49/64"(985)

54"(1372)
57 1/16"(1449)
51 1/2"(1308)
50 3/4"(1289)
46 49/64"(1188)


MO BRICKMOLD 62"(1575)
MO FLAT CASING 65 1/16"(1652)
ROUGH OPENING 59 1/2"(1511)
FRAME SIZE 58 3/4"(1492)
DAYLIGHT OPENING 54 49/64"(1391)

31 7/8"(810)
33 3/8"(848)
30 1/8"(765)
29 3/8"(746)
25 3/16"(650)




CCD29-2HRDS

35 7/8"(911)
37 3/8"(949)
34 1/8"(867)
33 3/8"(848)
29 37/64"(751)



CCD33-2HRDS

40 5/8"(1032)
43 1/16"(1109)
38 1/8"(968)
37 3/8"(949)
33 37/64"(853)




CCD37-2HRDS

70"(1778)
73 1/16"(1855)
67 1/2"(1715)
66 3/4"(1695)
62 49/64"(1594)

78"(1981)
81 1/16"(2059)
75 1/2"(1918)
74 3/4"(1899)
70 49/64"(1797)


MO BRICKMOLD 86"(2184)
MO FLAT CASING 89 1/16"(2262)
ROUGH OPENING 83 1/2"(2121)
FRAME SIZE 82 3/4"(2102)
DAYLIGHT OPENING 78 49/64"(2001)

43 7/8"(1114)
45 3/8"(1153)
42 1/8"(1070)
41 3/8"(1051)
37 37/64"(954)



CCD41-2HRDS

47 7/8"(1216)
49 3/8"(1254)
46 1/8"(1172)
45 3/8"(1153)
41 37/64"(1056)

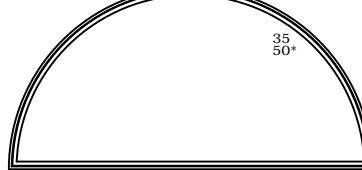

CCD45-2HRDS

94"(2388)
97 1/16"(2465)
91 1/2"(2324)
90 3/4"(2305)
86 49/64"(2204)

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


**CUSTOM CLAD WINDOWS
CUSTOM GEO**

**ELEVATIONS
DIRECT SET
CASEMENT QTR RD UNITS**

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

20 1/4"(523)
23 5/16"(601)
18 3/4"(476)
18"(457)
14 7/16"(367)


20 1/4"(523)
23 5/16"(601)
18 3/4"(476)
18"(457)
14 7/16"(367)



CC18QRDS

23 1/4"(591)
26 5/16"(668)
20 3/4"(527)
20"(508)
16 7/16"(418)


23 1/4"(591)
26 5/16"(668)
20 3/4"(527)
20"(508)
16 7/16"(418)



CC20QRDS

27 1/4"(692)
30 5/16"(770)
24 3/4"(629)
24"(610)
20 7/16"(519)

27 1/4"(692)
30 5/16"(770)
24 3/4"(629)
24"(610)
20 7/16"(519)




CC24QRDS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

31 1/4"(794)
34 5/16"(871)
28 3/4"(730)
28"(711)
24 7/16"(672)


31 1/4"(794)
34 5/16"(871)
28 3/4"(730)
28"(711)
24 7/16"(672)



CC28QRDS

33 1/4"(845)
36 5/16"(922)
30 3/4"(781)
30"(762)
26 7/16"(672)


33 1/4"(845)
36 5/16"(922)
30 3/4"(781)
30"(762)
26 7/16"(672)



CC30QRDS

35 1/4"(895)
38 5/16"(973)
32 3/4"(832)
32"(813)
28 7/16"(722)

35 1/4"(895)
38 5/16"(973)
32 3/4"(832)
32"(813)
28 7/16"(722)




CC32QRDS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

39 1/4"(997)
42 5/16"(1074)
36 3/4"(933)
36"(914)
32 7/16"(824)


39 1/4"(997)
42 5/16"(1074)
36 3/4"(933)
36"(914)
32 7/16"(824)



CC36QRDS

45 1/4"(1149)
48 5/16"(1227)
42 3/4"(1086)
42"(1067)
38 7/16"(976)

45 1/4"(1149)
48 5/16"(1227)
42 3/4"(1086)
42"(1067)
38 7/16"(976)

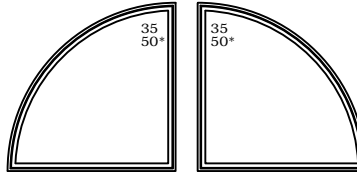


CC42QRDS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

51 1/4"(1302)
54 5/16"(1379)
48 3/4"(1238)
48"(1219)
44 7/16"(1129)

51 1/4"(1302)
54 5/16"(1379)
48 3/4"(1238)
48"(1219)
44 7/16"(1129)

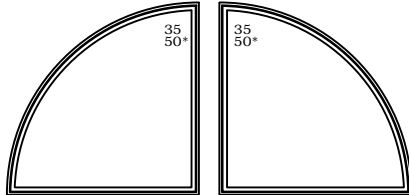

CC48QRDS

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masorny Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.


ELEVATIONS
DIRECT SET
OCTAGON UNITS

MO BRICKMOLD 23 1/4"(591)
MO FLAT CASING 26 5/16"(668)
ROUGH OPENING 20 3/4"(527)
FRAME SIZE 20"(508)
DAYLIGHT OPENING 16 7/32"(412)




CCOCT20DS

27 1/4"(692)
30 5/16"(770)
24 3/4"(629)
24"(610)
20 7/32"(514)




CCOCT24DS

33 1/4"(845)
36 5/16"(922)
30 3/4"(781)
30"(762)
26 7/32"(666)




CCOCT30DS

35 1/4"(895)
38 5/16"(973)
32 3/4"(832)
32"(813)
28 7/32"(717)




CCOCT32DS

MO BRICKMOLD 39 1/4"(997)
MO FLAT CASING 42 5/16"(1074)
ROUGH OPENING 36 3/4"(933)
FRAME SIZE 36"(914)
DAYLIGHT OPENING 32 7/32"(818)




CCOCT36DS

45 1/4"(1149)
48 5/16"(1227)
42 3/4"(1086)
42"(1067)
38 7/32"(971)



CCOCT42DS

51 1/4"(1302)
54 5/16"(1379)
48 3/4"(1238)
48"(1219)
44 7/32"(1123)



CCOCT48DS


ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING


Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
INSASH
FULL ROUND UNITS

MO BRICKMOLD	23 1/4"(591)	27 1/4"(692)	33 1/4"(845)	35 1/4"(895)	39 1/4"(997)
MO FLAT CASING	26 5/16"(668)	30 5/16"(770)	36 5/16"(922)	38 5/16"(973)	42 5/16"(1074)
ROUGH OPENING	20 3/4"(527)	24 3/4"(629)	30 3/4"(781)	32 3/4"(832)	36 3/4"(933)
FRAME SIZE	20"(508)	24"(610)	30"(762)	32"(813)	36"(914)
DAYLIGHT OPENING	15 13/64"(386)	19 13/64"(488)	25 13/64"(640)	27 13/64"(691)	31 13/64"(793)

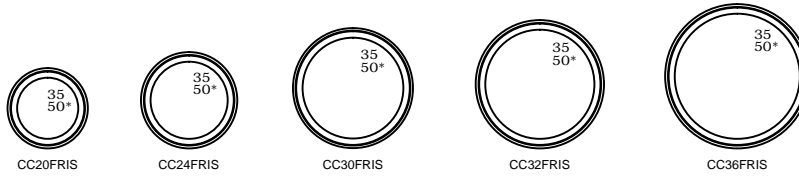

MO BRICKMOLD	45 1/4"(1149)	51 1/4"(1302)	57 1/4"(1454)	63 1/4"(1607)
MO FLAT CASING	48 5/16"(1227)	54 5/16"(1379)	60 5/16"(1532)	66 5/16"(1684)
ROUGH OPENING	42 3/4"(1086)	48 3/4"(1238)	54 3/4"(1391)	60 3/4"(1543)
FRAME SIZE	42"(1067)	48"(1219)	54"(1372)	60"(1524)
DAYLIGHT OPENING	37 13/64"(945)	43 13/64"(1097)	49 13/64"(1250)	55 13/64"(1402)

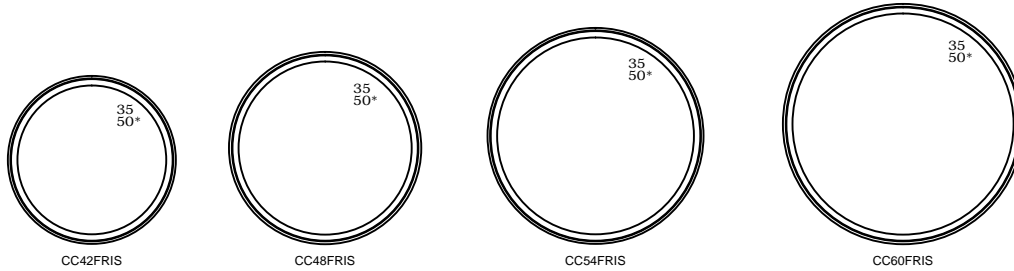

ELEVATION SYMBOL LEGEND:
M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
INSASH
HALF ROUND UNITS

MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	21 1/4"(540) 24 5/16"(617) 18 3/4"(476) 18"(457) 12 47/64"(323)	23 1/4"(591) 26 5/16"(668) 20 3/4"(527) 20"(508) 14 47/64"(374)	27 1/4"(692) 30 5/16"(770) 24 3/4"(629) 24"(610) 18 47/64"(476)	31 1/4"(794) 34 5/16"(871) 28 3/4"(730) 28"(711) 22 47/64"(559)	33 1/4"(845) 36 5/16"(922) 30 3/4"(781) 30"(762) 24 47/64"(628)
	11 1/2"(292) 13"(330) 9 3/4"(246) 9"(229) 4 13/64"(107)	12 1/2"(318) 14"(356) 10 3/4"(273) 10"(254) 5 13/64"(132)	14 1/2"(368) 16"(406) 12 3/4"(324) 12"(305) 7 13/64"(183)	16 1/2"(419) 18"(457) 14 3/4"(375) 14"(356) 9 13/64"(234)	17 1/2"(445) 19"(483) 15 3/4"(400) 15"(381) 10 13/64"(258)
	CC18HRIS	CC20HRIS	CC24HRIS	CC28HRIS	CC30HRIS

MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	35 1/4"(895) 38 5/16"(973) 32 3/4"(832) 32"(813) 26 47/64"(679)	39 1/4"(997) 42 5/16"(1074) 36 3/4"(933) 36"(914) 30 47/64"(781)	43 1/4"(1099) 46 5/16"(1176) 40 3/4"(1035) 40"(1016) 34 47/64"(882)	45 1/4"(1149) 48 5/16"(1227) 42 3/4"(1086) 42"(1067) 36 47/64"(933)
	18 1/2"(470) 20"(508) 16 3/4"(425) 16"(406) 11 13/64"(285)	20 1/2"(521) 22"(559) 18 3/4"(476) 18"(457) 13 13/64"(335)	22 1/2"(571) 24"(610) 20 3/4"(527) 20"(508) 15 13/64"(386)	23 1/2"(597) 25"(635) 21 3/4"(552) 21"(533) 16 13/64"(412)
	CC32HRIS	CC36HRIS	CC40HRIS	CC42HRIS

MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	51 1/4"(1302) 54 5/16"(1379) 48 3/4"(1236) 48"(1219) 42 47/64"(1085)	57 1/4"(1545) 60 5/16"(1532) 54 3/4"(1391) 54"(1372) 48 47/64"(1238)	59 1/4"(1505) 62 5/16"(1582) 56 3/4"(1441) 56"(1422) 50 47/64"(1289)
	26 1/2"(673) 28"(711) 24 3/4"(629) 24"(610) 19 13/64"(488)	29 1/2"(749) 31"(787) 27 3/4"(705) 27"(686) 22 13/64"(564)	30 1/2"(775) 32"(813) 28 3/4"(730) 28"(711) 23 13/64"(589)
	CC48HRIS	CC54HRIS	CC56HRIS

MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	63 1/4"(1607) 66 5/16"(1684) 60 3/4"(1543) 60"(1524) 54 47/64"(1390)	67 1/4"(1708) 70 5/16"(1786) 64 3/4"(1645) 64"(1626) 58 47/64"(1492)	69 1/4"(1759) 72 5/16"(1836) 66 3/4"(1695) 66"(1676) 60 47/64"(1543)
	32 1/2"(826) 34"(864) 30 3/4"(781) 30"(762) 25 13/64"(640)	34 1/2"(876) 35"(914) 32 3/4"(832) 32"(813) 27 13/64"(691)	35 1/2"(902) 37"(940) 33 3/4"(857) 33"(838) 28 13/64"(716)
	CC60HRIS	CC64HRIS	CC66HRIS

MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	75 1/4"(1911) 78 5/16"(1989) 72 3/4"(1848) 72"(1829) 66 47/64"(1695)	87 1/4"(2216) 90 5/16"(2294) 84 3/4"(2153) 84"(2134) 78 47/64"(2000)
	38 1/2"(978) 40"(1016) 36 3/4"(933) 36"(914) 31 13/64"(793)	44 1/2"(1130) 45"(1168) 42 3/4"(1086) 42"(1067) 37 13/64"(945)
	CC72HRIS	CC84HRIS

MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	93 1/4"(2369) 96 5/16"(2446) 90 3/4"(2305) 90"(2286) 84 47/64"(2152)	99 1/4"(2521) 102 5/16"(2598) 96 3/4"(2457) 96"(2438) 90 47/64"(2305)
	47 1/2"(1207) 48"(1245) 45 3/4"(1162) 45"(1143) 40 13/64"(1021)	50 1/2"(1283) 52"(1321) 48 3/4"(1238) 48"(1219) 43 13/64"(1097)
	CC90HRIS	CC96HRIS

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O. (Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
INSASH
INSWING PD HALF ROUND UNITS

MO BRICKMOLD 26 11/16"(678)
MO FLAT CASING 29 3/4"(755)
ROUGH OPENING 24 3/16"(614)
FRAME SIZE 23 7/16"(595)
DAYLIGHT OPENING 18 1/64"(459)

32 11/16"(830)
35 3/4"(908)
30 3/16"(767)
29 7/16"(748)
24 1/64"(611)

34 11/16"(881)
37 3/4"(959)
32 3/16"(818)
31 7/16"(799)
26 1/64"(662)

38 11/16"(983)
41 3/4"(1060)
36 3/16"(919)
35 7/16"(900)
30 1/64"(764)

49 7/8"(1267)
52 15/16"(1344)
47 3/8"(1203)
46 5/8"(1184)
41 35/64"(1055)

14 1/4"(361)
15 3/4"(399)
12 1/2"(317)
11 3/4"(298)
6 59/64"(176)




CCIPD20HRIS

17 1/4"(437)
18 3/4"(475)
15 1/2"(394)
14 3/4"(374)
9 59/64"(252)




CCIPD26HRIS

18 1/4"(463)
19 3/4"(501)
16 1/2"(419)
15 3/4"(399)
10 59/64"(277)



CCIPD28HRIS

20 1/4"(514)
21 3/4"(552)
18 1/2"(470)
17 3/4"(450)
12 59/64"(328)



CCIPD30HRIS

25 13/16"(656)
27 5/16"(694)
24 1/16"(611)
23 5/16"(592)
18 33/64"(470)




CCIPD40HRIS

MO BRICKMOLD 61 7/8"(1572)
MO FLAT CASING 64 15/16"(1649)
ROUGH OPENING 59 3/8"(1508)
FRAME SIZE 58 5/8"(1489)
DAYLIGHT OPENING 53 35/64"(1360)

65 7/8"(1673)
68 15/16"(1751)
63 3/8"(1610)
62 5/8"(1591)
57 35/64"(1462)


73 7/8"(1876)
76 15/16"(1954)
71 3/8"(1813)
70 5/8"(1794)
65 35/64"(1665)

31 13/16"(808)
33 5/16"(846)
30 1/16"(764)
29 5/16"(745)
24 33/64"(623)



CCIPD50HRIS

33 13/16"(859)
35 5/16"(897)
32 1/16"(814)
31 5/16"(795)
26 33/64"(673)



CCIPD54HRIS

37 13/16"(960)
39 5/16"(999)
36 1/16"(916)
35 5/16"(897)
30 33/64"(775)



CCIPD60HRIS

MO BRICKMOLD 28 11/16"(729)
MO FLAT CASING 31 3/4"(806)
ROUGH OPENING 26 3/16"(665)
FRAME SIZE 25 7/16"(646)
DAYLIGHT OPENING 20 1/64"(510)

36 11/16"(932)
39 3/4"(1009)
34 3/16"(868)
33 7/16"(849)
28 1/64"(713)

40 11/16"(1033)
43 3/4"(1111)
38 3/16"(970)
37 7/16"(951)
32 1/64"(814)

46 11/16"(1186)
49 3/4"(1263)
44 3/16"(1122)
43 7/16"(1103)
38 1/64"(967)

15 1/4"(387)
16 3/4"(425)
13 1/2"(343)
12 3/4"(323)
7 59/64"(201)




CCIPDT20HRIS

19 1/4"(488)
20 3/4"(526)
17 1/2"(444)
16 3/4"(425)
11 59/64"(303)



CCIPDT28HRIS

21 1/4"(539)
22 3/4"(577)
19 1/2"(495)
18 3/4"(475)
13 59/64"(354)



CCIPDT30HRIS

24 1/4"(615)
25 3/4"(653)
22 1/2"(572)
21 3/4"(552)
16 59/64"(430)




CCIPDT36HRIS

MO BRICKMOLD 53 7/8"(1368)
MO FLAT CASING 56 15/16"(1446)
ROUGH OPENING 51 3/8"(1305)
FRAME SIZE 50 5/8"(1286)
DAYLIGHT OPENING 45 35/64"(1157)

69 7/8"(1775)
72 15/16"(1852)
67 3/8"(1711)
66 5/8"(1692)
61 35/64"(1563)

77 7/8"(1978)
80 15/16"(2055)
75 3/8"(1914)
74 5/8"(1895)
69 35/64"(1766)

27 13/16"(706)
29 5/16"(745)
26 1/16"(662)
25 5/16"(643)
20 33/64"(521)



CCIPDT40HRIS

35 13/16"(910)
37 5/16"(948)
34 1/16"(865)
33 5/16"(846)
28 33/64"(724)



CCIPDT54HRIS

39 13/16"(1011)
41 5/16"(1049)
38 1/16"(967)
37 5/16"(948)
32 33/64"(826)




CCIPDT60HRIS

MO BRICKMOLD 89 7/8"(2283)
MO FLAT CASING 92 15/16"(2360)
ROUGH OPENING 87 3/8"(2219)
FRAME SIZE 86 5/8"(2200)
DAYLIGHT OPENING 81 35/64"(2071)

95 7/8"(2411)
98 15/16"(2488)
93 3/8"(2347)
92 5/8"(2328)
87 35/64"(2206)

45 13/16"(1164)
47 5/16"(1202)
44 1/16"(1119)
43 5/16"(1100)
38 33/64"(978)

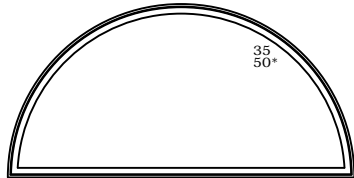

CCIPDT70HRIS

ELEVATION SYMBOL LEGEND:
M.O. = MASORY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING


Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masory Opening) for Unit Sizes. Masory openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masory Openings page.

ELEVATIONS
INSASH
OUTSWING PD HALF ROUND UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

50 7/16"(1281)
53 1/2"(1359)
47 15/16"(1218)
47 3/16"(1199)
42 7/64"(1070)


26 1/8"(663)
27 5/8"(701)
24 3/8"(619)
23 5/8"(599)
18 51/64"(477)



CCOPD40HRIS


62 7/16"(1586)
65 1/2"(1663)
59 15/16"(1522)
59 3/16"(1503)
54 7/64"(1374)

32 1/8"(834)
35 5/8"(912)
30 3/8"(772)
29 5/8"(752)
24 51/64"(630)



CCOPD50HRIS

34 1/8"(866)
35 5/8"(904)
32 3/8"(822)
31 5/8"(802)
26 51/64"(661)




CCOPD54HRIS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

74 7/16"(1891)
77 1/2"(1968)
71 15/16"(1827)
71 3/16"(1808)
66 7/64"(1679)

38 1/8"(968)
39 5/8"(1006)
36 3/8"(924)
35 5/8"(904)
30 51/64"(782)



CCOPD60HRIS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

29 1/4"(743)
32 5/16"(820)
26 3/4"(679)
26"(660)
21 19/32"(548)


15 1/2"(394)
17(432)
13 3/4"(349)
13(330)
8 13/64"(208)



CCOPDT20HRIS

37 1/4"(946)
40 5/16"(1024)
34 3/4"(883)
34"(864)
29 19/32"(752)


19 1/2"(495)
21(533)
17 3/4"(451)
17(432)
12 13/64"(310)



CCOPDT28HRIS


41 1/4"(1048)
44 5/16"(1125)
38 3/4"(984)
38"(965)
33 19/32"(853)

21 1/2"(546)
23(584)
19 3/4"(502)
19"(483)
14 13/64"(361)



CCOPDT30HRIS

24 1/2"(622)
26(660)
22 3/4"(578)
22(559)
17 13/64"(437)




CCOPDT36HRIS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

54 7/16"(1383)
57 1/2"(1460)
51 15/16"(1319)
51 3/16"(1300)
46 7/64"(1171)


28 1/8"(712)
29 5/8"(750)
26 3/8"(670)
25 5/8"(649)
20 51/64"(528)



CCOPDT40HRIS


70 7/16"(1789)
73 1/2"(1864)
67 15/16"(1726)
67 3/16"(1707)
62 7/64"(1576)

36 1/8"(917)
37 5/8"(955)
34 3/8"(873)
33 5/8"(853)
27 51/64"(706)



CCOPDT54HRIS

40 1/8"(1018)
41 5/8"(1056)
38 3/8"(975)
37 5/8"(955)
32 51/64"(833)




CCOPDT60HRIS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

90 7/16"(2297)
93 1/2"(2375)
87 15/16"(2234)
87 3/16"(2215)
82 7/64"(2086)

46 1/8"(1171)
47 5/8"(1209)
44 3/8"(1127)
43 5/8"(1107)
38 51/64"(985)

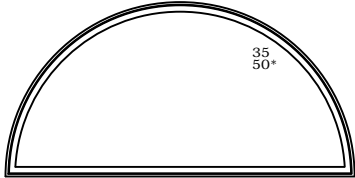

CCOPDT70HRIS

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING


Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

**ELEVATIONS
INSASH
PDH QUARTER ROUND UNITS**

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

24 5/8"(625)
27 11/16"(703)
22 1/8"(562)
21 3/8"(543)
17 1/2"(445)


23 7/8"(606)
25 3/8"(645)
22 1/8"(562)
21 3/8"(543)
17 1/2"(445)



CCD21QRIS

28 5/8"(727)
31 11/16"(805)
26 1/8"(663)
25 3/8"(645)
21 1/2"(546)


27 7/8"(708)
29 3/8"(746)
26 1/8"(663)
25 3/8"(645)
21 1/2"(546)



CCD25QRIS

32 5/8"(829)
35 11/16"(906)
30 1/8"(765)
29 3/8"(746)
25 1/2"(648)

31 7/8"(810)
33 3/8"(848)
30 1/8"(765)
29 3/8"(746)
25 1/2"(648)




CCD29QRIS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

36 5/8"(930)
39 11/16"(1008)
34 1/8"(867)
33 3/8"(848)
29 1/2"(749)


35 7/8"(911)
37 3/8"(949)
34 1/8"(867)
33 3/8"(848)
29 1/2"(749)



CCD33QRIS

40 5/8"(1032)
43 11/16"(1109)
38 1/8"(968)
37 3/8"(949)
33 1/2"(851)

39 7/8"(1013)
41 3/8"(1051)
38 1/8"(968)
37 3/8"(949)
33 1/2"(851)




CCD37QRIS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

44 5/8"(1133)
47 11/16"(1211)
42 1/8"(1070)
41 3/8"(1051)
37 1/2"(953)


43 7/8"(1114)
45 3/8"(1153)
42 1/8"(1070)
41 3/8"(1051)
37 1/2"(953)

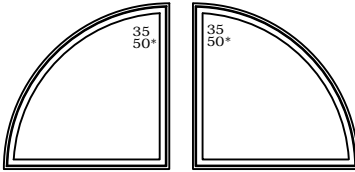

CCD41QRIS

48 5/8"(1235)
51 11/16"(1313)
46 1/8"(1171)
45 3/8"(1153)
41 1/2"(1054)

47 7/8"(1216)
49 3/8"(1254)
46 1/8"(1171)
45 3/8"(1153)
41 1/2"(1054)

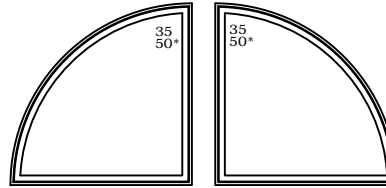

CCD45QRIS

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
INSASH
PDH HALF ROUND UNITS

MO BRICKMOLD	24 5/8"(625)	28 5/8"(727)	32 5/8"(829)	36 5/8"(930)	40 5/8"(1032)
MO FLAT CASING	27 11/16"(703)	31 11/16"(805)	35 11/16"(906)	39 11/16"(1008)	43 11/16"(1109)
ROUGH OPENING	22 1/8"(562)	26 1/8"(664)	30 1/8"(765)	34 1/8"(867)	38 1/8"(968)
FRAME SIZE	21 3/8"(543)	25 3/8"(645)	29 3/8"(746)	33 3/8"(848)	37 3/8"(949)
DAYLIGHT OPENING	15 55/64"(403)	19 55/64"(504)	23 55/64"(606)	27 55/64"(708)	31 55/64"(809)

13 3/16"(336)
14 11/16"(374)
11 7/16"(291)
10 11/16"(272)
5 57/64"(150)




CCD21HRIS

15 3/16"(386)
16 11/16"(424)
13 7/16"(341)
12 11/16"(322)
7 57/64"(200)




CCD25HRIS

17 3/16"(437)
18 11/16"(475)
15 7/16"(392)
14 11/16"(373)
9 57/64"(251)




CCD29HRIS

19 3/16"(487)
20 11/16"(525)
17 7/16"(443)
16 11/16"(424)
11 57/64"(302)



CCD33HRIS


21 3/16"(538)
22 11/16"(576)
19 7/16"(494)
18 11/16"(475)
13 57/64"(353)



CCD37HRIS

MO BRICKMOLD	44 5/8"(1133)	48 5/8"(1235)	46"(1168)	54"(1372)
MO FLAT CASING	47 11/16"(1211)	51 11/16"(1313)	49 1/16"(1246)	57 1/16"(1449)
ROUGH OPENING	42 1/8"(1070)	46 1/8"(1171)	43 1/2"(1105)	51 1/2"(1308)
FRAME SIZE	41 3/8"(1051)	45 3/8"(1153)	42 3/4"(1086)	50 3/4"(1289)
DAYLIGHT OPENING	35 55/64"(911)	39 55/64"(1012)	37 41/64"(956)	45 41/64"(1159)

23 3/16"(589)
24 11/16"(627)
21 7/16"(544)
20 11/16"(525)
15 57/64"(404)




CCD41HRIS

25 3/16"(640)
26 11/16"(678)
23 7/16"(595)
22 11/16"(576)
17 57/64"(454)




CCD45HRIS

23 7/8"(606)
23 3/8"(645)
21 1/2"(543)
21 3/8"(543)
16 37/64"(421)



CCD21-2HRIS


27 7/8"(708)
29 3/8"(746)
26 1/8"(663)
25 3/8"(645)
20 37/64"(523)



CCD25-2HRIS

MO BRICKMOLD	62"(1575)	70"(1778)	78"(1981)
MO FLAT CASING	65 1/16"(1652)	73 1/16"(1855)	81 1/16"(2059)
ROUGH OPENING	59 1/2"(1511)	67 1/2"(1714)	75 1/2"(1918)
FRAME SIZE	58 3/4"(1492)	66 3/4"(1695)	74 3/4"(1899)
DAYLIGHT OPENING	53 41/64"(1362)	61 41/64"(1566)	69 41/64"(1769)

31 7/8"(810)
33 3/8"(848)
30 1/8"(765)
29 3/8"(746)
24 37/64"(624)



CCD29-2HRIS

35 7/8"(911)
37 3/8"(949)
34 1/8"(867)
33 3/8"(848)
28 37/64"(726)



CCD33-2HRIS


40 5/8"(1032)
43 11/16"(1109)
38 1/8"(968)
37 3/8"(949)
32 37/64"(827)



CCD37-2HRIS

MO BRICKMOLD	86"(2184)	94"(2388)
MO FLAT CASING	89 1/16"(2262)	97 1/16"(2465)
ROUGH OPENING	83 1/2"(2121)	91 1/2"(2324)
FRAME SIZE	82 3/4"(2102)	90 3/4"(2305)
DAYLIGHT OPENING	77 41/64"(1972)	85 41/64"(2175)

43 7/8"(1114)
45 3/8"(1153)
42 1/8"(1070)
41 3/8"(1051)
36 37/64"(929)



CCD41-2HRIS

47 7/8"(1216)
49 3/8"(1254)
46 1/8"(1171)
45 3/8"(1153)
41 37/64"(1086)



CCD45-2HRIS

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

CUSTOM CLAD WINDOWS CUSTOM GEO

ELEVATIONS INSASH

CASEMENT QUARTER ROUND UNITS


MO BRICKMOLD 21 1/4"(540)
MO FLAT CASING 24 5/16"(617)
ROUGH OPENING 18 3/4"(476)
FRAME SIZE 18"(457)
DAYLIGHT OPENING 13 1/64"(331)

23 1/4"(591)
26 5/16"(668)
20 3/4"(527)
20"(508)
15 1/32"(382)

27 1/4"(692)
30 5/16"(770)
24 3/4"(629)
24"(610)
19 1/16"(484)


31 1/4"(794)
34 5/16"(871)
28 3/4"(730)
28"(711)
23 1/16"(586)

20 1/2"(521)
22"(559)
18 3/4"(476)
18"(457)
13 1/64"(331)




CC18QRIS

22 1/2"(571)
24"(610)
20 3/4"(527)
20"(508)
15 1/32"(382)




CC20QRIS

26 1/2"(673)
28"(711)
24 3/4"(629)
24"(610)
19 1/16"(484)



CC24QRIS

30 1/2"(775)
32"(813)
28 3/4"(730)
28"(711)
23 1/16"(586)



CC28QRIS


MO BRICKMOLD 33 1/4"(845)
MO FLAT CASING 36 5/16"(922)
ROUGH OPENING 30 3/4"(781)
FRAME SIZE 30"(762)
DAYLIGHT OPENING 25 1/16"(637)

33 1/4"(845)
36 5/16"(922)
32 3/4"(832)
32"(813)
27 7/64"(689)

35 1/4"(895)
38 5/16"(973)
32 3/4"(832)
32"(813)
27 7/64"(689)


39 1/4"(997)
42 5/16"(1074)
36 3/4"(933)
36"(914)
31 7/64"(790)

32 1/2"(826)
34"(864)
30 3/4"(781)
30"(762)
25 1/16"(637)




CC30QRIS

34 1/2"(876)
36"(914)
32 3/4"(832)
32"(813)
27 7/64"(689)



CC32QRIS

38 1/2"(978)
40"(1016)
36 3/4"(933)
36"(914)
31 7/64"(790)




CC36QRIS

MO BRICKMOLD 45 1/4"(1149)
MO FLAT CASING 48 5/16"(1227)
ROUGH OPENING 42 3/4"(1086)
FRAME SIZE 42"(1067)
DAYLIGHT OPENING 37 1/8"(943)

45 1/4"(1149)
48 5/16"(1227)
42 3/4"(1086)
42"(1067)
37 1/8"(943)


51 1/4"(1302)
54 5/16"(1379)
48 3/4"(1238)
48"(1219)
43 9/64"(1096)

44 1/2"(1130)
46"(1168)
42 3/4"(1086)
42"(1067)
37 1/8"(943)

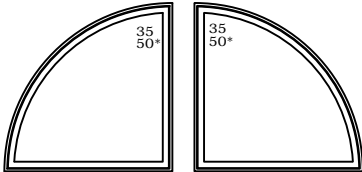

CC42QRIS

50 1/2"(1283)
52"(1321)
48 3/4"(1238)
48"(1219)
43 9/64"(1096)

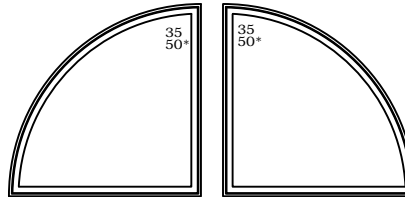

CC48QRIS

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING


Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.

ELEVATIONS
INSASH
OCTAGON UNITS


MO BRICKMOLD	23 1/4"(591)	27 1/4"(692)	33 1/4"(845)	35 1/4"(895)
MO FLAT CASING	26 5/16"(668)	30 5/16"(770)	36 5/16"(922)	38 5/16"(973)
ROUGH OPENING	20 3/4"(527)	24 3/4"(629)	30 3/4"(781)	32 3/4"(832)
FRAME SIZE	20"(508)	24"(610)	30"(762)	32"(813)
DAYLIGHT OPENING	15 13/64"(386)	19 13/64"(488)	25 13/64"(640)	27 13/64"(691)




CCOC20IS



CCOC24IS




CCOC30IS




CCOC32IS

MO BRICKMOLD	39 1/4"(997)	45 1/4"(1149)	51 1/4"(1302)
MO FLAT CASING	42 5/16"(1074)	48 5/16"(1227)	54 5/16"(1379)
ROUGH OPENING	36 3/4"(933)	42 3/4"(1086)	48 3/4"(1238)
FRAME SIZE	36"(914)	42"(1067)	48"(1219)
DAYLIGHT OPENING	31 13/64"(792)	37 13/64"(945)	43 13/64"(1105)



CCOC36IS



CCOC42IS



CCOC48IS

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 ## NUMBER INDICATES DESIGN PRESSURE (DP) RATING WITH STANDARD GLAZING

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masorny Opening) for Unit Sizes. Masorny openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masorny Openings page.